

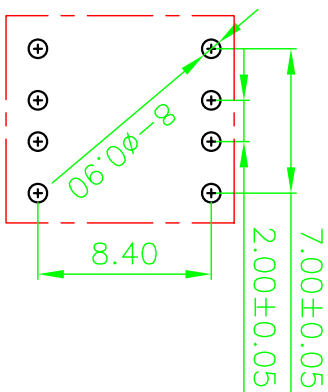
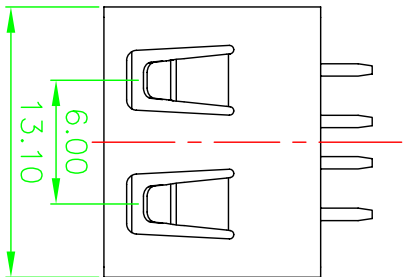


Parts Drawing

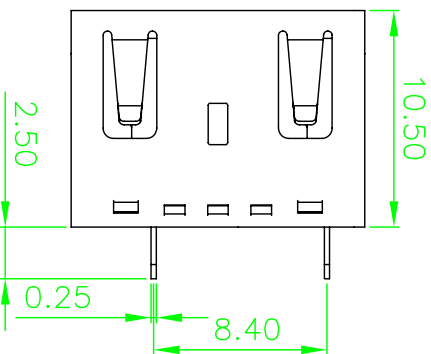

RECOMMENDED P.C.B
PATTERN LAY OUT

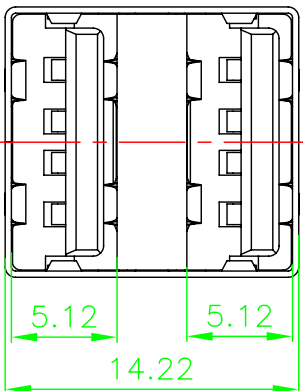

1	907-322A1021Y102	5
2		6
3		7
4		8

PART ON:
907-222AXXXX1Y1XX

电镀规格: 02, 镀金1u" 04, 镀金3u"
07, 镀金15u" 08, 镀金30u"
端子材质: 1, 青铜 2, 磷铜
端子规格: D, 90度 Y, 180度 S, SMT贴片
塑胶型号: 1, 双层短体 2, 双层半包
塑胶颜色: 01, 白色 02, 黑色 03, 本色

塑胶材质: 1, PBT 2, LCP 3, PA9T 4, PPA 5, PA6T


对插方向: A, 正向 B, 反向
外壳材质: 1, 铁壳 2, 铜壳
插口类型: 1, 有边半脚 2, 无边半脚
外壳脚型: 1, 弯脚 2, 直脚 3, 无脚
类别: 双层系列

REVISIONS			
SW	ECN No.	MODIFICATION	DATE ISSUED

Note:

- Material:
 - Housing: High temperature thermoplastic with/black G/F, UL94v-0
 - Contact: copper alloy, t=0.25mm
 - Shell: copper/Ferroalloy alloy, t=0.30mm
- Specification:
 - Current rating: 1.5A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
- Finish:
 - Contact: Plated Gold in Mating Area: Tin On Solder Talls
 - Shell: Nickel Plating

4.Environmental:
4.1, Temperature range: -55°C~85°C

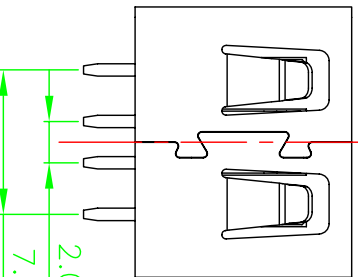

DRAWN	深圳市精拓金电子有限公司		
CHECKED	TITLE	PART NO.	SEE PART ON
APPROVED	USB AF 10.5短体双层无脚 无边	DRAWING NO.	R907322A1021Y102
	UNIT	SCALE	SHEET
	mm	1:1	1 OF 1
	TOLERANCE	SIZE	REV.
	.XXX±.10, .XX±.25, .X±.38, ANGLE±5°	A4	X1

