


MAPX	MODIFICATION	DATE
------	--------------	------

NOTE:

- Material:
Housing: Thermoplastics (U94V-0(ROHS-HP))
Contact: Phosphor Bronze C5191-2H/C2680-2H, T=0.25mm
Shell: COPPER ALLOY T=0.30mm
- FINISH:
Contact: 15u" Gold Plated on Contact Area,
80u" Min. Tin Plated on Solder Area
50u" Min. Nickel Underplating Over All.
Shell: 50u" Min Nickel Underplating Over All.
- Specification:
3.1: Rating:
3.2: Rated voltage 500V AC/DC. Rated current: 2 A Max.
3.2: Electrical:
Insulation Resistance(EIA-364-21):
1000MΩ Min. at 500V/DC for 1Minute.
Contact Resistance(EIA-364-22):
30 mΩ Max. at 20mV Max, 50mA
Dielectric Withstanding Voltage(EIA-364-20):
No discharge, Flashover or breakdown at 500V/AC 1Minute
Plug extraction force shall be between 1.0kgf and 2.00kgf
- Plug extraction force shall be between 1.0kgf and 2.00kgf
- Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

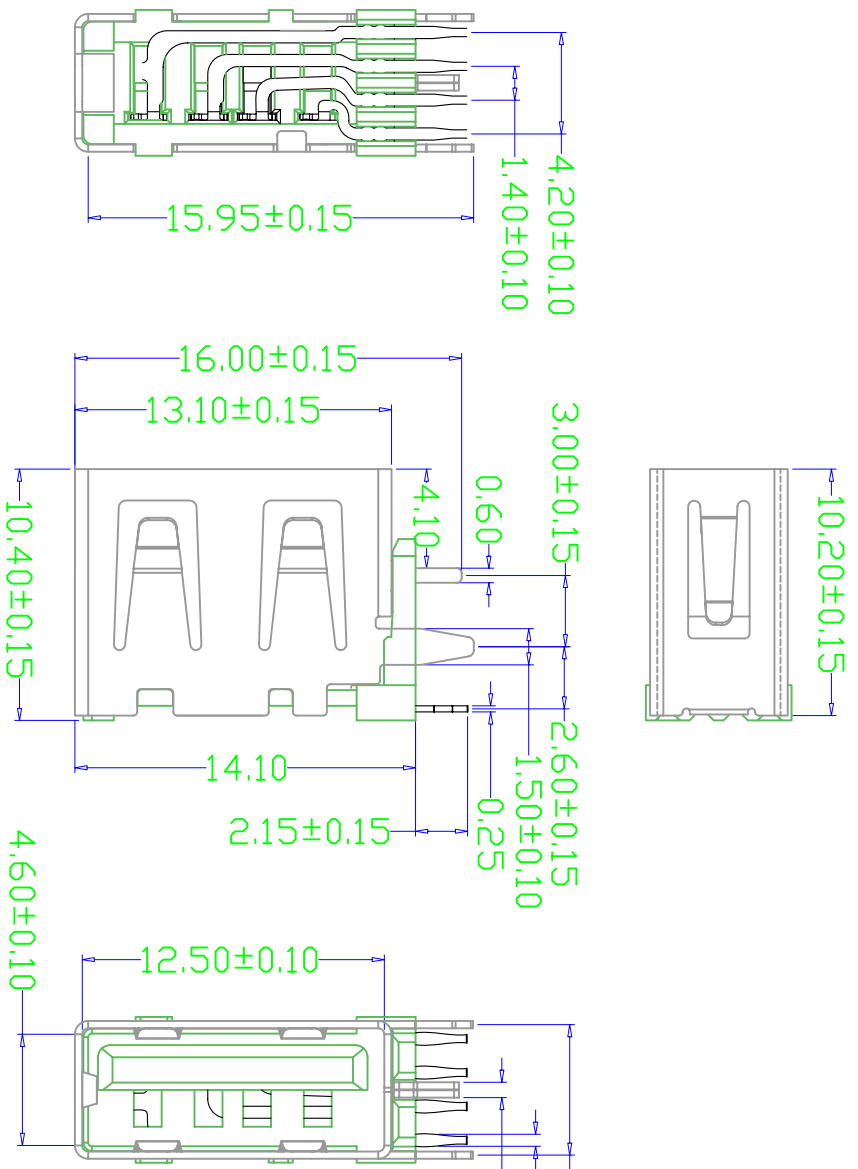

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05

产品图

深圳市精拓金电子有限公司

公差一览表

公差一览表		单位		制图		制图料号	
TOLERANCE UNLESS OTHERWISE		UNITS		DRAWING		PRODUCT PART NO.	
X	±0.25	X	±5.°	审核		产品名称	USB AF10, 5侧插短体三直脚无边成品 (反向加厚型胶芯)
.X	±0.20	.X	±2.°	日期	2014.07.20	比例	1:1
.XX	±0.15	.XX	±1.°	日期	2014.07.20	日期	2014.07.20
.XXX	±0.10	.XXX	±0.5°	核准		核准	
				DATE		DATE	

