


MAPX	MODIFICATION	DATE

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V AC
- Insulation Resistance:1000M Ω Min.
- Contact Resistance:30 M Ω Max.
- Dielectric Withstanding Voltage:500W AC
- Temperature Range:-55 $^{\circ}$ C to +85 $^{\circ}$ C
- Insulator color: Black/White
- Plastic material:PBT/LCP
- Shell finish:Nickel plated/Tin-Lead plated
- Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"

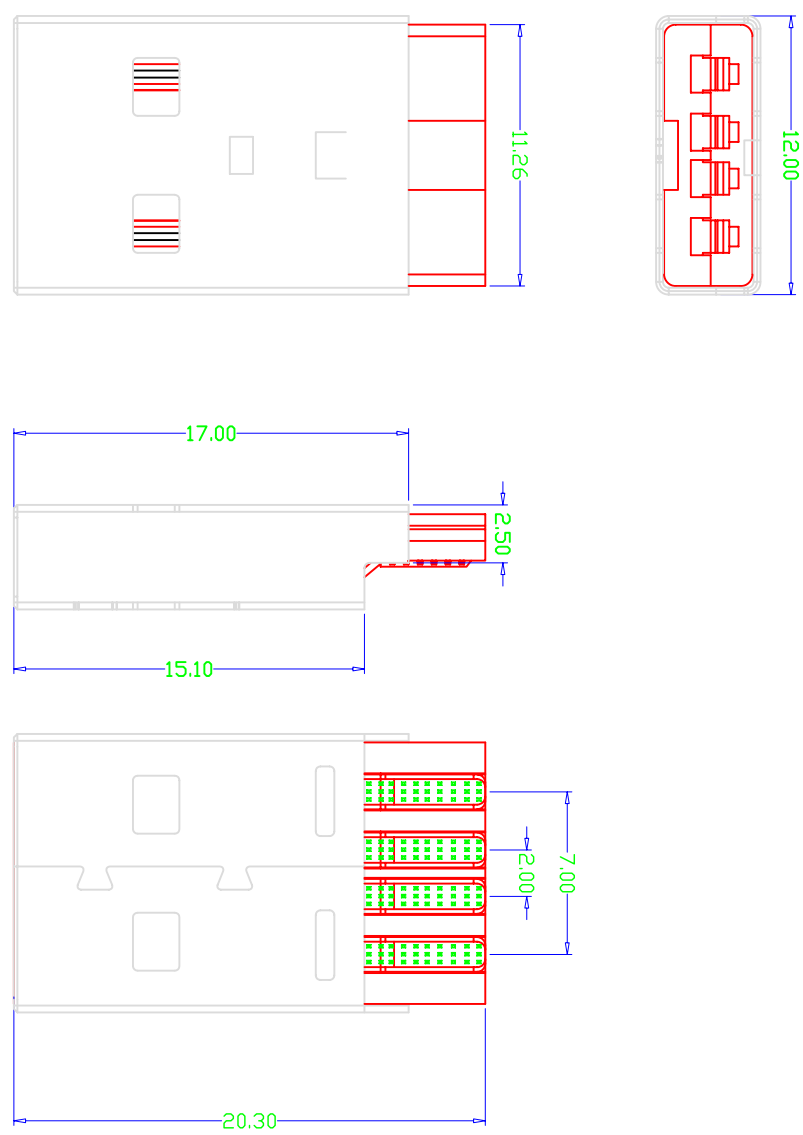

产品图
PRODUCT CHART DWG

公差—黄表		公差—蓝表	
TOLERANCE	UNLESS OTHERWISE	TOLERANCE	UNLESS OTHERWISE
X	± 0.25	X	$\pm 5.0^{\circ}$
X	± 0.20	X	$\pm 2.0^{\circ}$
.XX	± 0.15	.XX	$\pm 1.0^{\circ}$
.XXX	± 0.10	.XXX	$\pm 0.5^{\circ}$

深圳市精拓金电子有限公司

单位	MM	制图	2-Y-B	制料号
UNITS	MM	DRAWING	2-Y-B	PRODUCT PART NO
比例	1:1	审核		产品名称
SCALE	1:1	CHGD		PRODUCT NO
日期	2012.12.25	核准		角法
DATE	2012.12.25	APPD		VIEW
				版本
				VER
				A0

