

MAPX	MODIFICATION	DATE
------	--------------	------







Note:

1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f.i. UL94v-0
- 1.2 Contact: copper alloy, t=0.15mm
- 1.3 Shell: copper alloy, t=0.30mm

2. Specification:

- 2.1 Current rating: 1.5PIN 3A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

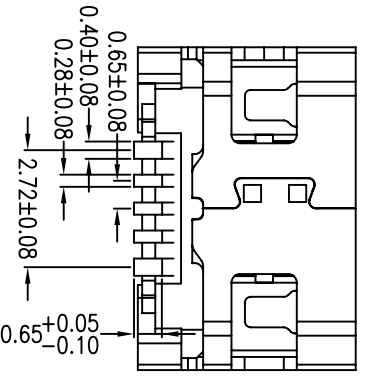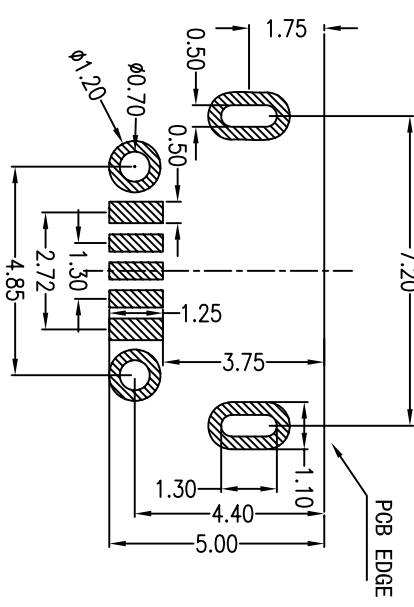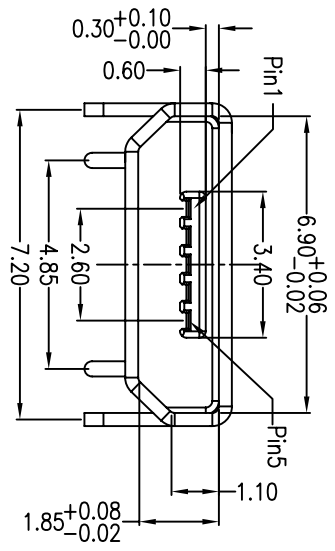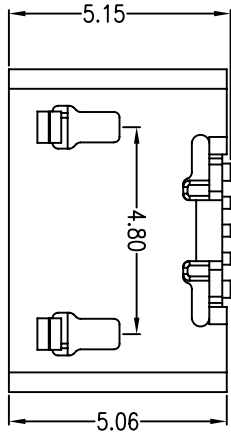

产品图  
PRODUCT CHART DWG

深圳市精拓金电子有限公司

公差一览表		单位		制图		制料号	
TOLERANCE UNLESS OTHERWISE	UNITS	MM	DRAWING	PRODUCT PART NO.	MICRO USB 5S B TYPE		
X ±0.35	X	±5°	审核	郭治富	产品名称		
X ±0.30	X	±2°	CHKD	黄国荣	四脚全贴片角型短针头1.5加宽		
XX ±0.20	XX	±1°	核准		角法		
XXX ±0.10	XXX	±0.5°	APPR		版本		
			DATE	2015-10-19	AD		

G 1 2 3 4 5 6 7 8 9 10 G

F

E

D

C

B

A