



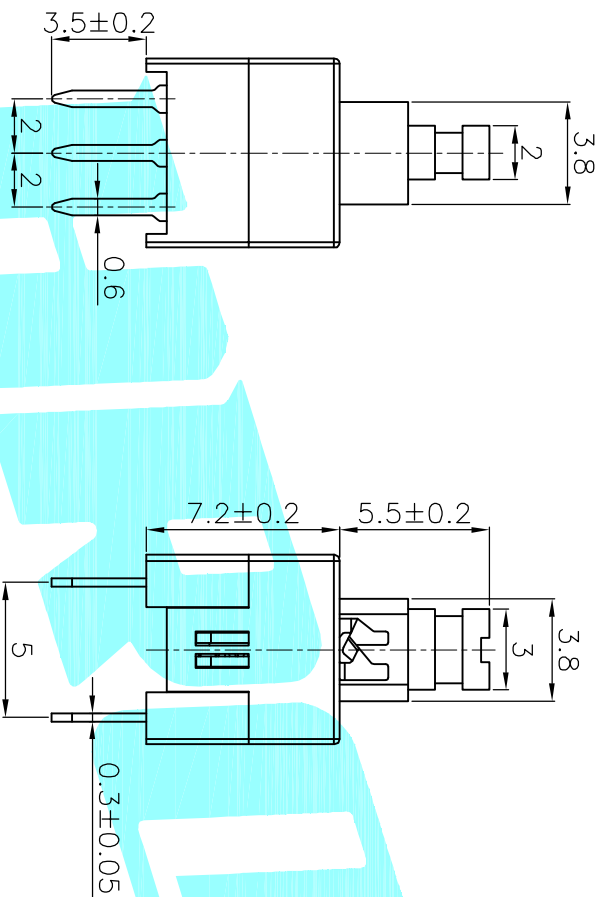



NOTE:
 1. Operating Force: 230gf±50gf
 2. Travel : 2.4±0.2mm



Circuit Diagram

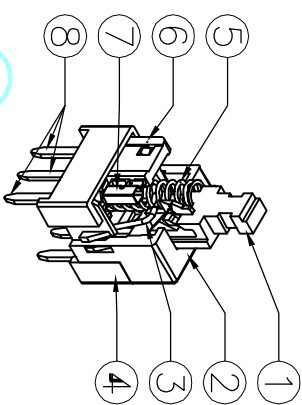

PCB Layout(Pattern Side)

NO.	Operating Type	Part No.
1	Push To Lock	K8-7071D-L1
2	Push No Lock	K8-7071D-N1
3	Push No Sound No Lock	K8-7071D-NN

NO.	Terminal	Quantity	Material	Plating
⑧	Terminal	6	Brass strip	Plating silver
⑦	Contact	2	Phosphor bronze	Plating silver
⑥	Securing glue	2	PA66	Black
⑤	Spring	1	SUS	Natural
④	Base	1	PBT	Black
③	Crochet Needle	1	SUS	Natural
②	Cover	1	POM	White
①	Knob	1	POM	Blue

APPROVALS		DATE		TITLE:		PART NO.	
DRAWN	J.X.Zhang	DATE	2013/10/17	ELECTRONICS CO.,LTD		PUSHBUTTON SWITCHS	
CHECKED							
APPROVALS							
TOLERANCES ARE		30~125 μm ±0.30	ANGLE	±2°	SCALE:	1:1	PROJ:
		10~30 ±0.20	ANGLE	±2°	SCALE:	1:1	PROJ:
		5~10 ±0.15	ANGLE	±2°	SCALE:	1:1	PROJ:
		~5 ±0.10	ANGLE	±2°	SCALE:	1:1	PROJ:
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	SHEET 1 OF 1
	A		NEW				