




# MBR1020 THRU MBR10100

## SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 10.0 Amperes

### TO-220AC

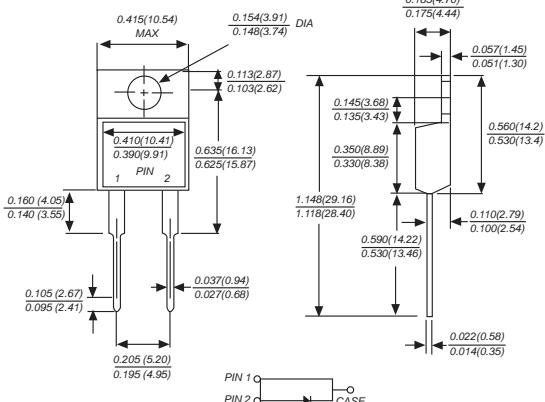

Dimensions in inches and (millimeters)

### FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 250°C, 0.25" (6.35mm) from case for 10 seconds

### MECHANICAL DATA

**Case:** TO-220AC molded plastic body

**Terminals:** Leads solderable per MIL-STD-750, Method 2026

**Polarity:** As marked

**Mounting Position:** Any

**Weight:** 0.064 ounce, 1.81 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	MBR 1020	MBR 1030	MBR 1040	MBR 1045	MBR 1050	MBR 1060	MBR 1070	MBR 1080	MBR 1090	MBR 10100	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	32	35	42	49	56	63	70	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum average forward rectified current (see fig.1)	I <sub>(AV)</sub>	10.0									Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	150.0									Amps	
Maximum instantaneous forward voltage at 10.0A	V <sub>F</sub>	0.65			0.75			0.85			Volts	
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =100°C	I <sub>R</sub>	1.0									mA	
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	550			450			pF				
Typical thermal resistance (NOTE 2)	R <sub>θJC</sub>	3.0									°C/W	
Operating junction temperature range	T <sub>J</sub>	-50 to +125				-50 to +150				°C		
Storage temperature range	T <sub>STG</sub>	-50 to +150									°C	


**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to case




# RATINGS AND CHARACTERISTIC CURVES MBR1020 THRU MBR10100


AVERAGE FORWARD RECTIFIED CURRENT,

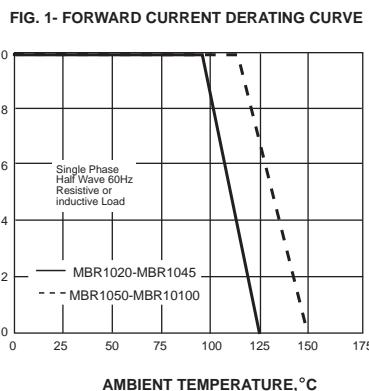


PEAK FORWARD SURGE CURRENT,  
AMBIENT TEMPERATURE, °C

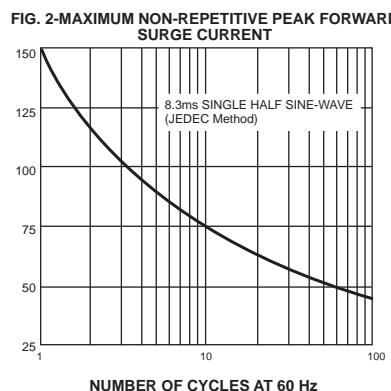


INSTANTANEOUS FORWARD  
CURRENT,AMPERES

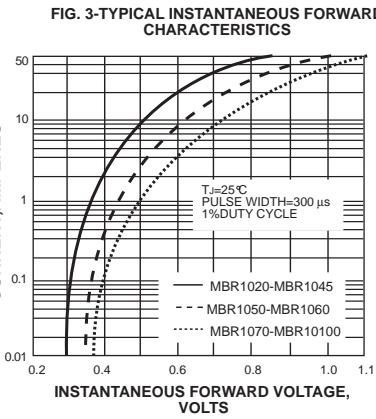


INSTANTANEOUS REVERSE CURRENT,  
MILLIAMPERES

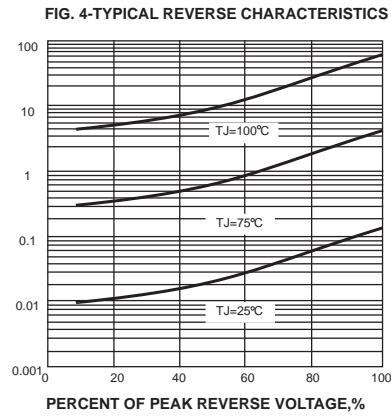

JUNCTION CAPACITANCE, pF

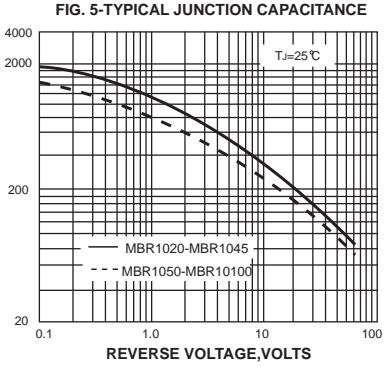

TRANSIENT THERMAL IMPEDANCE,  
°C/W

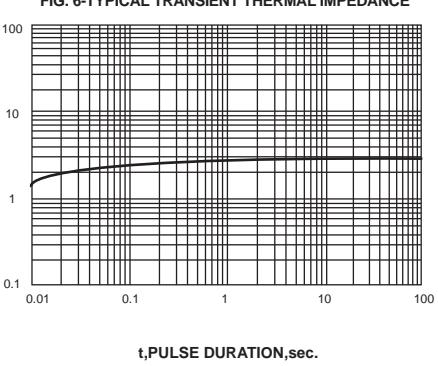

The curve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

