

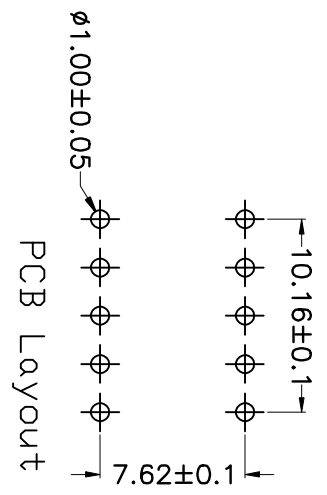
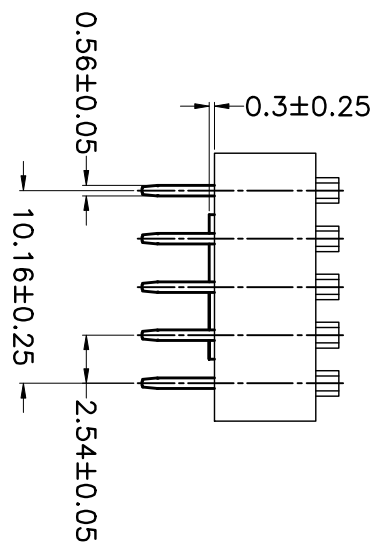
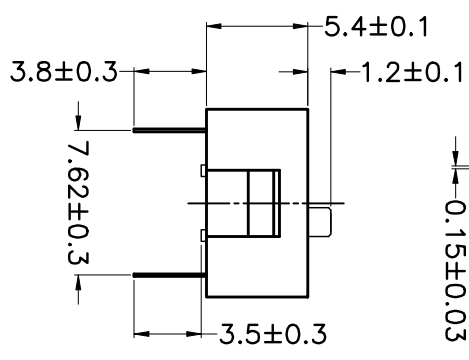



PRODUCT NO. DSWB05LHGCT
RoHS compliant



- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:

- Base: UL94V-0 PBT Thermoplastic (Black).
- Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
- Actuators: UL94V-0 PA66 Thermoplastic (White).
- Contact plating: Gold plating over nickel.
- Pitting material: Epoxy.

- Electrical
- Electrical: 2000 Operations per switch 24/VDC, 25mA.
- Non-Switching Rating: 100mA, 50/VDC.
- Switching Rating: 25mA, 24/VDC
- Contact Resistance: 100 mΩ Max at initial.

- Mechanical
- Mechanical life: 2000 Operations per switch.
- Stroke: 2.0mm.
- Operation Temp: -20°C to 70°C.
- Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS WB 05 L H G E T

- [Packing: T=Tube R=Reel]
- [Finish: B=1 μ"-3 μ" Gold-plated R=10 μ" Gold-plated]
- [Finish: G=Full Gold S=Contact Gold-plated Terminal-Tin-Plated]
- [Terminal: S=SMD type H=Strait:.....]
- [Actuator: T=Tepe sealed S=Low profile W/O Tepe L=Extension]
- [HP=Half-Pitch IC=IC type PV=Plano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		PROJECTION		TITLE	
LINER	ANGLES	0 ± 0.30	0 ± 1°			BY DSWB SERIES PITCH 2.54mm	
.00 ± 0.20	.0 ± 0.5°					PRODUCT FAMILY DSWB SERIES	
.000 ± 0.10	.00 ±					PRAT NO. DSWB05LHGCT	
DESIGN	LU ER XIN	2013/07/02				FILE NO. DSWB05LHGCT-A	
DRAWING						SIZE UNIT SCALE SHEET REV.	
CHECK						A4 mm FIT TOP 1 A	
APPRO.							

东莞市富实业有限公司
Dongguan Kingtek Industrial Co., Ltd.