



RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

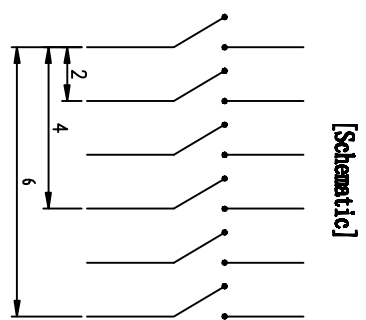


[Schematic]

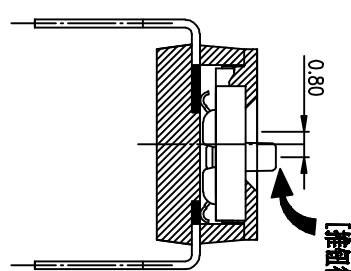


[推板行程]

- NOTES :
1. Specification:
- 1> Operating force: 1000gf Max
  - 2> Operating Temperature: -40° to +85°
  - 3> Storage Temperature: -40° to +85°
  - 4> Mechanical Life: 3000cycles minimum
  - 5> Electrical Life: 2000cycles 25mA 24VDC
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
  - 3u" GOLD PLATING ON THE CONTACT AREA,
  - WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

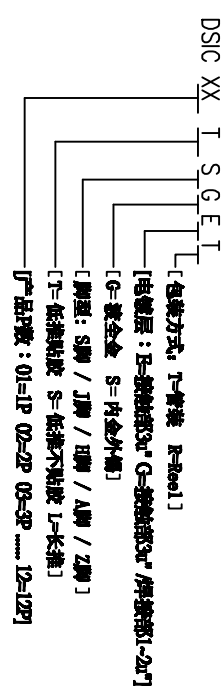

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	PROJECTION	TITLE
①	Actuator	UL94 V0	White	0 ± 0.25	ANGLES	0. ± 2'	BY DISC SERIES PITCH 2.54mm
②	Cover	UL94 V0	Black	.00 ± 0.15		.0 ± 1'	PRODUCT FAMILY DISC SERIES
③	Movable	Copper Alloy	3u"Gold	.000 ± 0.10		.00 ± 0.5'	PRAT NO. DISC06LHGET
④	Terminal	Brass	1u"Gold		DESIGN		FILE NO. DISC06LHGET-A
⑤	Base	UL94 V0	Black		DRAWING		SIZE UNIT SCALE SHEET REV.
⑥	Terminal Contact	Brass	3u"Gold		CHECK		A4 mm 2 : 1 10F-1 A



东莞市金捷实业有限公司  
Dongguan Kingtek Industrial Co., Ltd.