

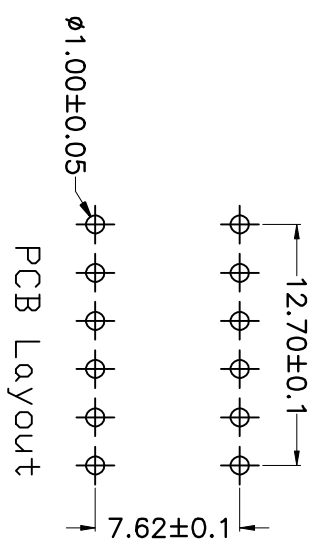
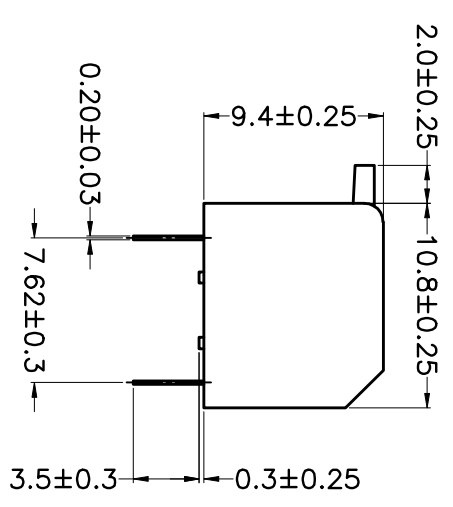
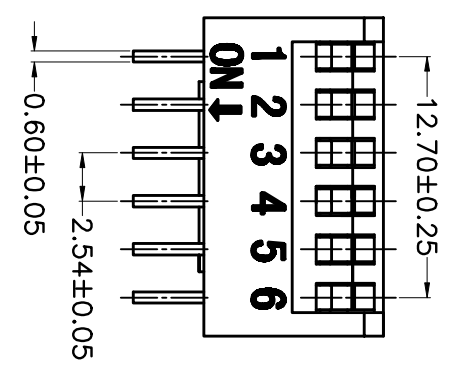



PRODUCT NO.	DSDP06LHG1T
RoHS compliant	

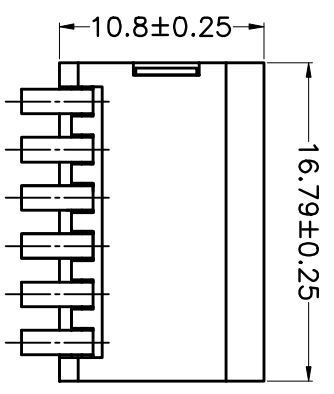


- Note:**
- All dimensions are in millimeters.
 - General tolerance: $\pm 0.2\text{mm}$.
 - Material:

Base: UL94V-0 PBT Thermoplastic (Black).
 Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
 Actuators: UL94V-0 PA66 Thermoplastic (White).
 Contact plating: Gold plating over nickel.
 Pitting material: Epoxy.

- Electrical
 Electrical: 2000 Operations per switch 24/VDC, 25mA.
 Non-Switching Rating: 100mA, 50/VDC.
 Switching Rating: 25mA, 24/VDC
 Contact Resistance: 100 mΩ Max. at initial.
- Mechanical
 Mechanical life: 2000 Operations per switch.
 Operation Temp: -20°C to 70°C.
 Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DP 06 L H G E T

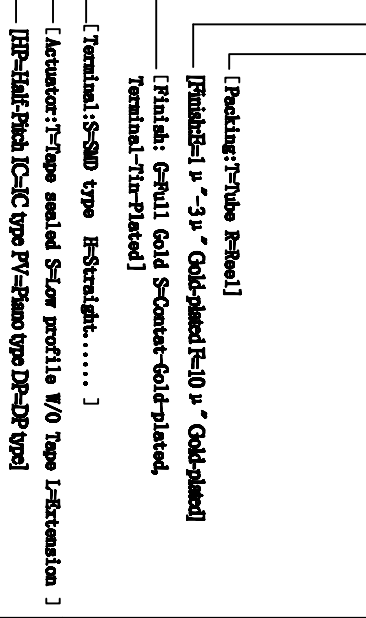

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY	
LINER	ANGLES	PROJECTION	
0 ± 0.30	0 ± 1°	[Symbol]	
.00 ± 0.20	.0 ± 0.5°	[Symbol]	
.000± 0.10	.00±	[Symbol]	
DESIGN	LU ER XIN	2013/07/02	
DRAWING	PRODUCT FAMILY DSDP SERIES		
CHECK	PRAT NO. DSDP06LHG1T		
APPRO.	FILE NO. DSDP06LHG1T-A		
	SIZE	UNIT	DSDP06LHG1T-A
	mm	SCALE	SHEET
	mm	FIT	REV.
			TOP-1
			A

东莞市广誉实业有限公司
 Dongguan Kingtek Industrial Co., Ltd.

BY DSDP SERIES PITCH 2.54mm

DSDP06LHG1T

REV. ECN NO. DR DATE