



## KF series

|                                        |                       |     |
|----------------------------------------|-----------------------|-----|
| Part number                            | <b>KF101M025E110A</b> |     |
| Capacitance                            | 100                   | μF  |
| Voltage                                | 25                    | VDC |
| Surge Voltage                          | 29                    | VDC |
| Capacitance Tolerance (@ +20°C)        | ±20                   | %   |
| Ripple current (max, @100kHz, +105°C)  | 370                   | mA  |
| Dissipation factor(tanδ @120Hz, +20°C) | 12                    | %   |
| Leakage Current (max, @ +20°C)*        | 25                    | μA  |
| Impedance (max.@100kHz, +20°C)         | 0.35                  | Ω   |
| Size                                   | 6.3x11                | mm  |
| Operating temperature                  | -40 to 105            | °C  |
| Endurance                              | 2000                  | h   |



L.C.: After 2 min. with rated working voltage applied.

| Test conditions                  | Endurance                                                                                             | Shelf Life    |
|----------------------------------|-------------------------------------------------------------------------------------------------------|---------------|
| Duration time                    | 2000h @ 105°C                                                                                         | 1000h @ 105°C |
| Applied voltage                  | Rated DC working voltage, I <sub>R</sub>                                                              | None          |
| After test requirements (+20°C): |                                                                                                       |               |
| Capacitance change               | ≤ ±20% of initial measured value                                                                      |               |
| Dissipation factor change        | ≤ 200% of the initial specified value                                                                 |               |
| Leakage current                  | ≤ the initial specified value                                                                         |               |
| comment                          | Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 min. |               |

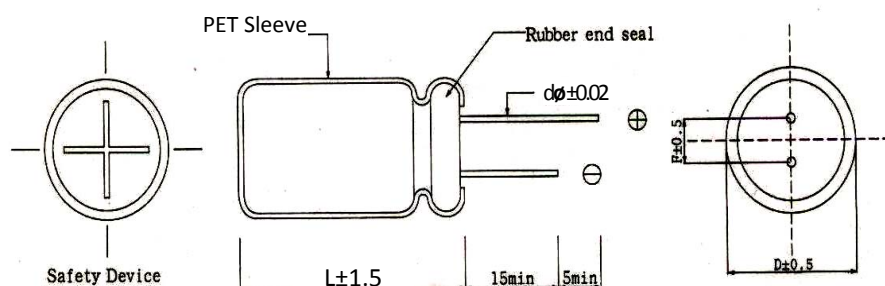

|    |     |
|----|-----|
| D  | 6.3 |
| L  | 11  |
| F  | 2.5 |
| dφ | 0.5 |

| Series    | Cap        | Tol.     | Voltage    | Case D   | Case L     | Type       | Lead Treatm. | Special     |
|-----------|------------|----------|------------|----------|------------|------------|--------------|-------------|
| 1_2       | 3_4_5      | 6        | 7_8_9      | 10       | 11_12_13   | 14         | 15_16        | 17_18_19_20 |
| <b>KF</b> | <b>101</b> | <b>M</b> | <b>025</b> | <b>E</b> | <b>110</b> | <b>A</b>   | <b>A</b>     |             |
|           | =100μF     | =±20%    | =25V       | =6.3mm   | =11mm      | A=standard | no request   |             |
|           |            |          |            |          |            |            |              |             |
|           | ...        |          |            |          |            |            |              |             |

Specification and description for the component(s) are subject to change without notice. For packaging, handling, precautions and warning information, please visit our website: [www.capxongroup.com](http://www.capxongroup.com)