

MV series


| | | |
|---|-------------------------|-----|
| Part number | MV221M6R3E077ETR | |
| Capacitance | 220 | μF |
| Voltage | 6.3 | VDC |
| Surge Voltage | 7 | VDC |
| Capacitance Tolerance (@120Hz, +20°C) | ±20 | % |
| Ripple current (max, @120Hz, +105°C) | 110 | mA |
| Dissipation factor (tanδ @120Hz, +20°C) | 32 | % |
| Leakage Current (max, @ +20°C)* | 13.86 | μA |
| Size | 6.3x7.7 | mm |
| Operating temperature | -40 to 105 | °C |
| Endurance | 5000 | h |



*L.C. $I \leq 0.01CV$ or $3\mu A$ (C = CAP., V = W.V.)

After 2 minutes, whichever is greater measured with rated working voltage applied.

| Test conditions | Endurance | Shelf Life |
|----------------------------------|---|---------------|
| Duration time | 5000h @ 105°C | 1000h @ 105°C |
| Applied voltage | Rated DC working voltage, I_R | None |
| After test requirements (+20°C): | | |
| Capacitance change | $\leq \pm 30\%$ of initial measured value | |
| Dissipation factor change | $\leq 300\%$ of the initial specified value | |
| Leakage current | \leq the initial specified value | |
| comment | Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 min. | |

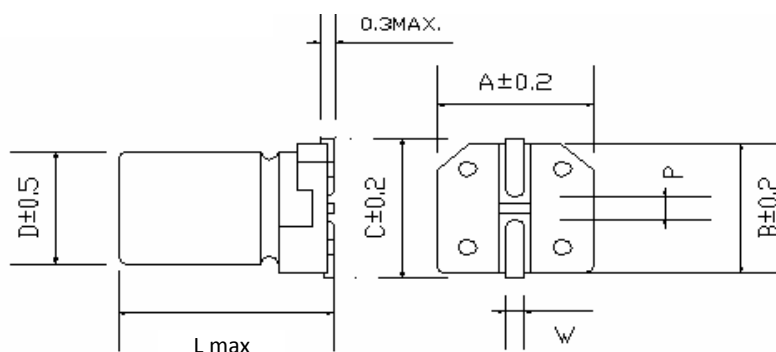

| D | L | A | B | C | W | P±0.2 |
|-----|-----|-----|-----|-----|---------|-------|
| 6.3 | 7.7 | 6.6 | 6.6 | 7.2 | 0.5~0.8 | 2.2 |

| Series | Cap | Tol. | Voltage | Case D | Case L | Type | Cust. |
|-----------|------------|----------|------------|----------|------------|----------------|-------------|
| 1_2 | 3_4_5 | 6 | 7_8_9 | 10 | 11_12_13 | 14_15_16 | 17_18_19_20 |
| MV | 221 | M | 6R3 | E | 077 | ETR | |
| | =220μF | =±20% | =6.3V | =6.3mm | =7.7mm | =tape and reel | no request |
| | ... | | | | | | |