



KM series

| Part number | KM101M200J250A | |
|----------------------------------------|----------------|-----|
| Capacitance | 100 | μF |
| Voltage | 200 | VDC |
| Surge Voltage | 230 | VDC |
| Capacitance Tolerance (@ +20°C) | ±20 | % |
| Ripple current (max, @120Hz,+105°C) | 345 | mA |
| Dissipation factor(tanδ @120Hz, +20°C) | 12 | % |
| Leakage Current (max, @ +20°C)* | 600 | μA |
| Size | 16x25 | mm |
| Operating temperature | -25 to 105 | °C |
| Endurance | 2000 | h |

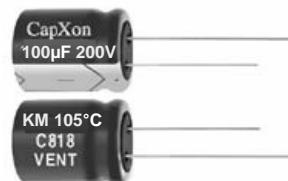

L.C.: After 1 min. with rated working voltage applied.

| Test conditions | Endurance | Shelf Life |
|----------------------------------|-------------------------------------------------------------------------------------------------------|---------------|
| Duration time | 2000h @ 105°C | 1000h @ 105°C |
| Applied voltage | Rated DC working voltage, I_R | None |
| After test requirements (+20°C): | | |
| Capacitance change | $\leq \pm 20\%$ of initial measured value | |
| Dissipation factor change | $\leq 200\%$ of the initial specified value | |
| Leakage current | \leq the initial specified value | |
| comment | Pre-treatment for measurements shall be conducted after application of DC working voltage for 30 min. | |

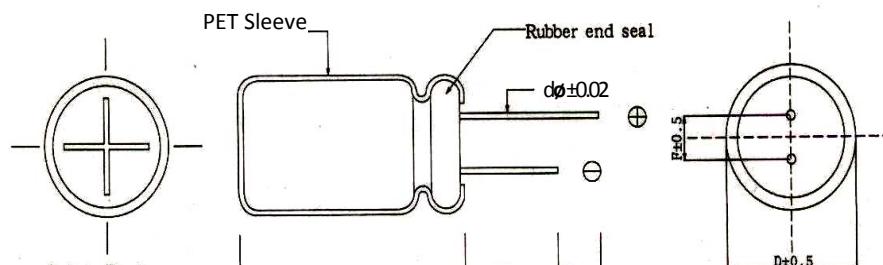

| | |
|----|-----|
| D | 16 |
| L | 25 |
| F | 7.5 |
| dφ | 0.8 |

| Series | Cap | Tol. | Voltage | Case D | Case L | Type | Lead Treatm. | Special |
|--------|--------|-------|---------|--------|----------|------------|--------------|-------------|
| 1_2 | 3_4_5 | 6 | 7_8_9 | 10 | 11_12_13 | 14 | 15_16 | 17_18_19_20 |
| KM | 101 | M | 200 | J | 250 | A | A | |
| | =100μF | =±20% | =200V | =16mm | =25mm | A=standard | no request | |
| | | | | | | | | |
| | ... | | | | | | | |