


PAPT NO	L
SK-3268D-L1	2.0
SK-3268D-L2	3.0
SK-3268D-L3	4.0

NOTE:
 Rating: DC 12V 50mA
 Operating Force: 200±100gf
 Lifetime: 100,000 Cycles

XKB SWITCH CONNECTOR

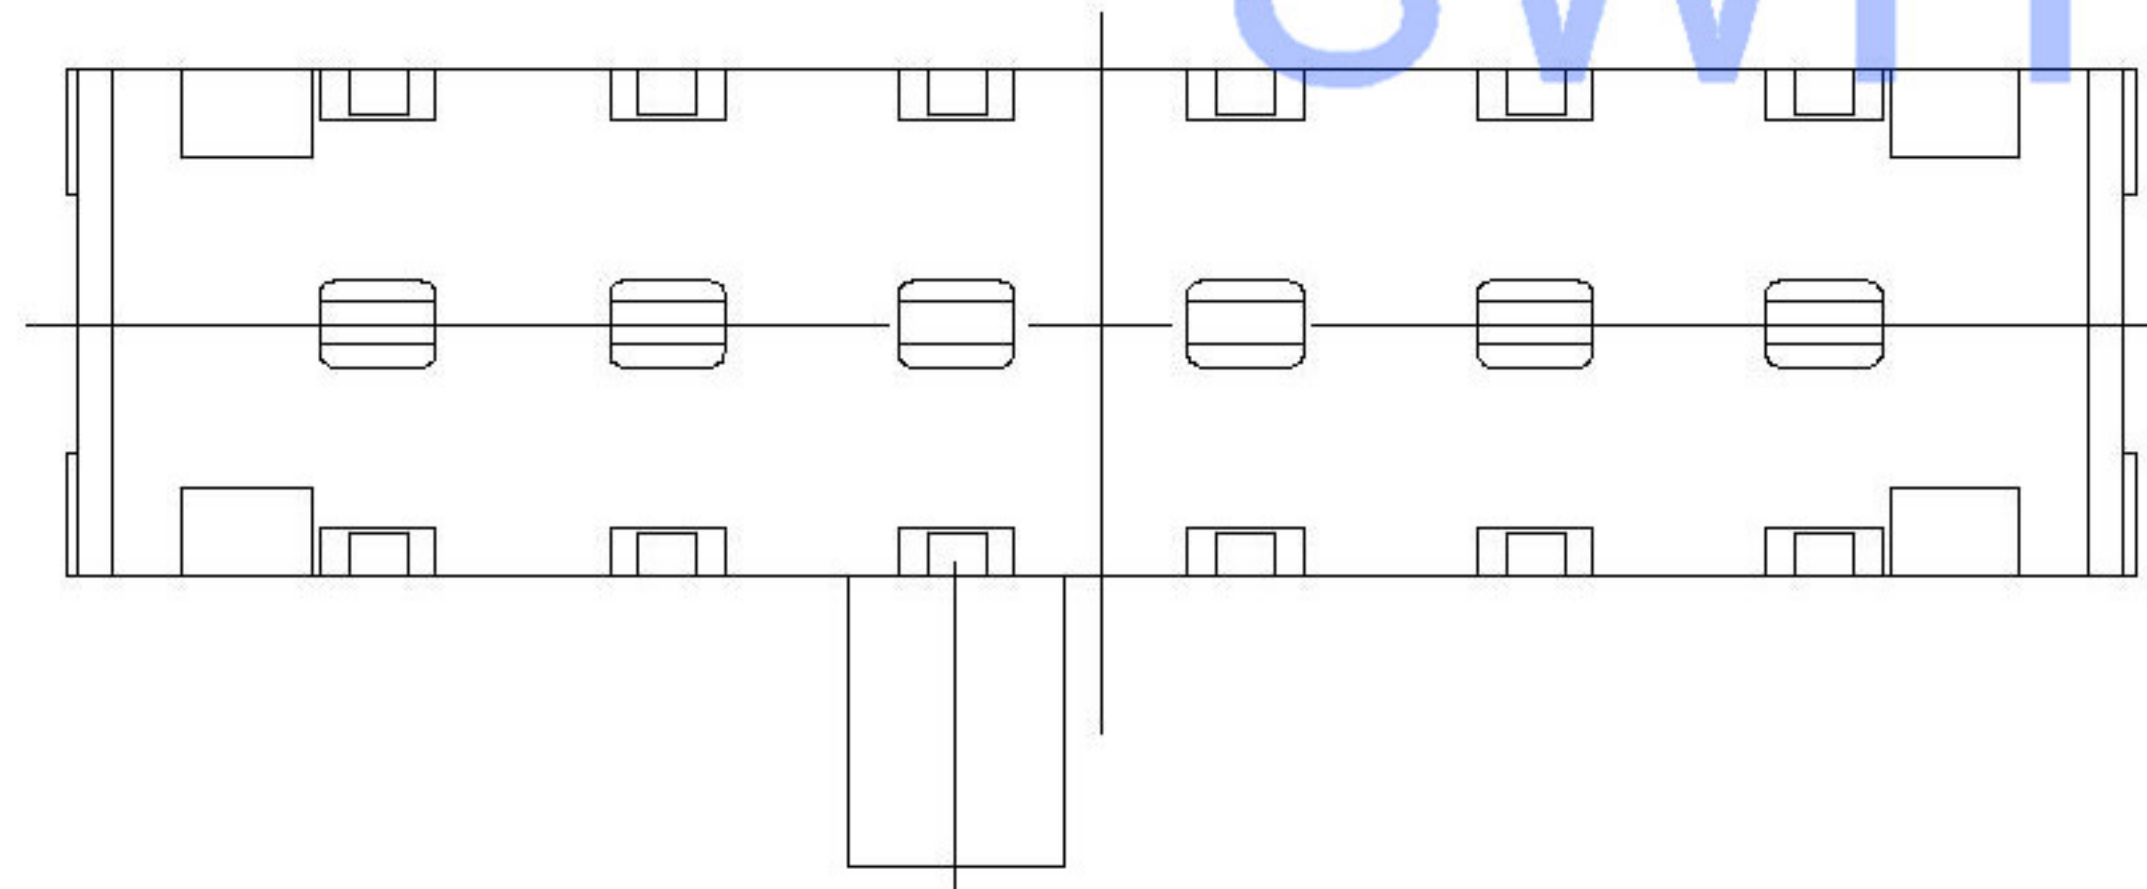

ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	12	Brass (0.30t)	ag Plated	—
④	Contact spring	—	1	Beryllium copper	—	—
③	Base	—	1	LCP	—	—
②	Cover	—	1	SUS	Tin plated	—
①	Keystake	—	1	PA46	—	—

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.: SK-3268D-X
APPD		DATE		SIZE: A4	WEIGHT 1.0g
XKB INDUSTRIAL PRECISION CO., LIMITED				SHEET 1/1	REVISION A0