


Circuit Diagram

PCB Layout (Pattern side)

NOTE:
 Rating: DC 12V 50mA
 Operating Force: 200±100gf
 Lifetime: 100,000 Cycles

PAPT NO	L
SK-3270SB-L1	2.0
SK-3270SB-L2	3.0
SK-3270SB-L3	4.0

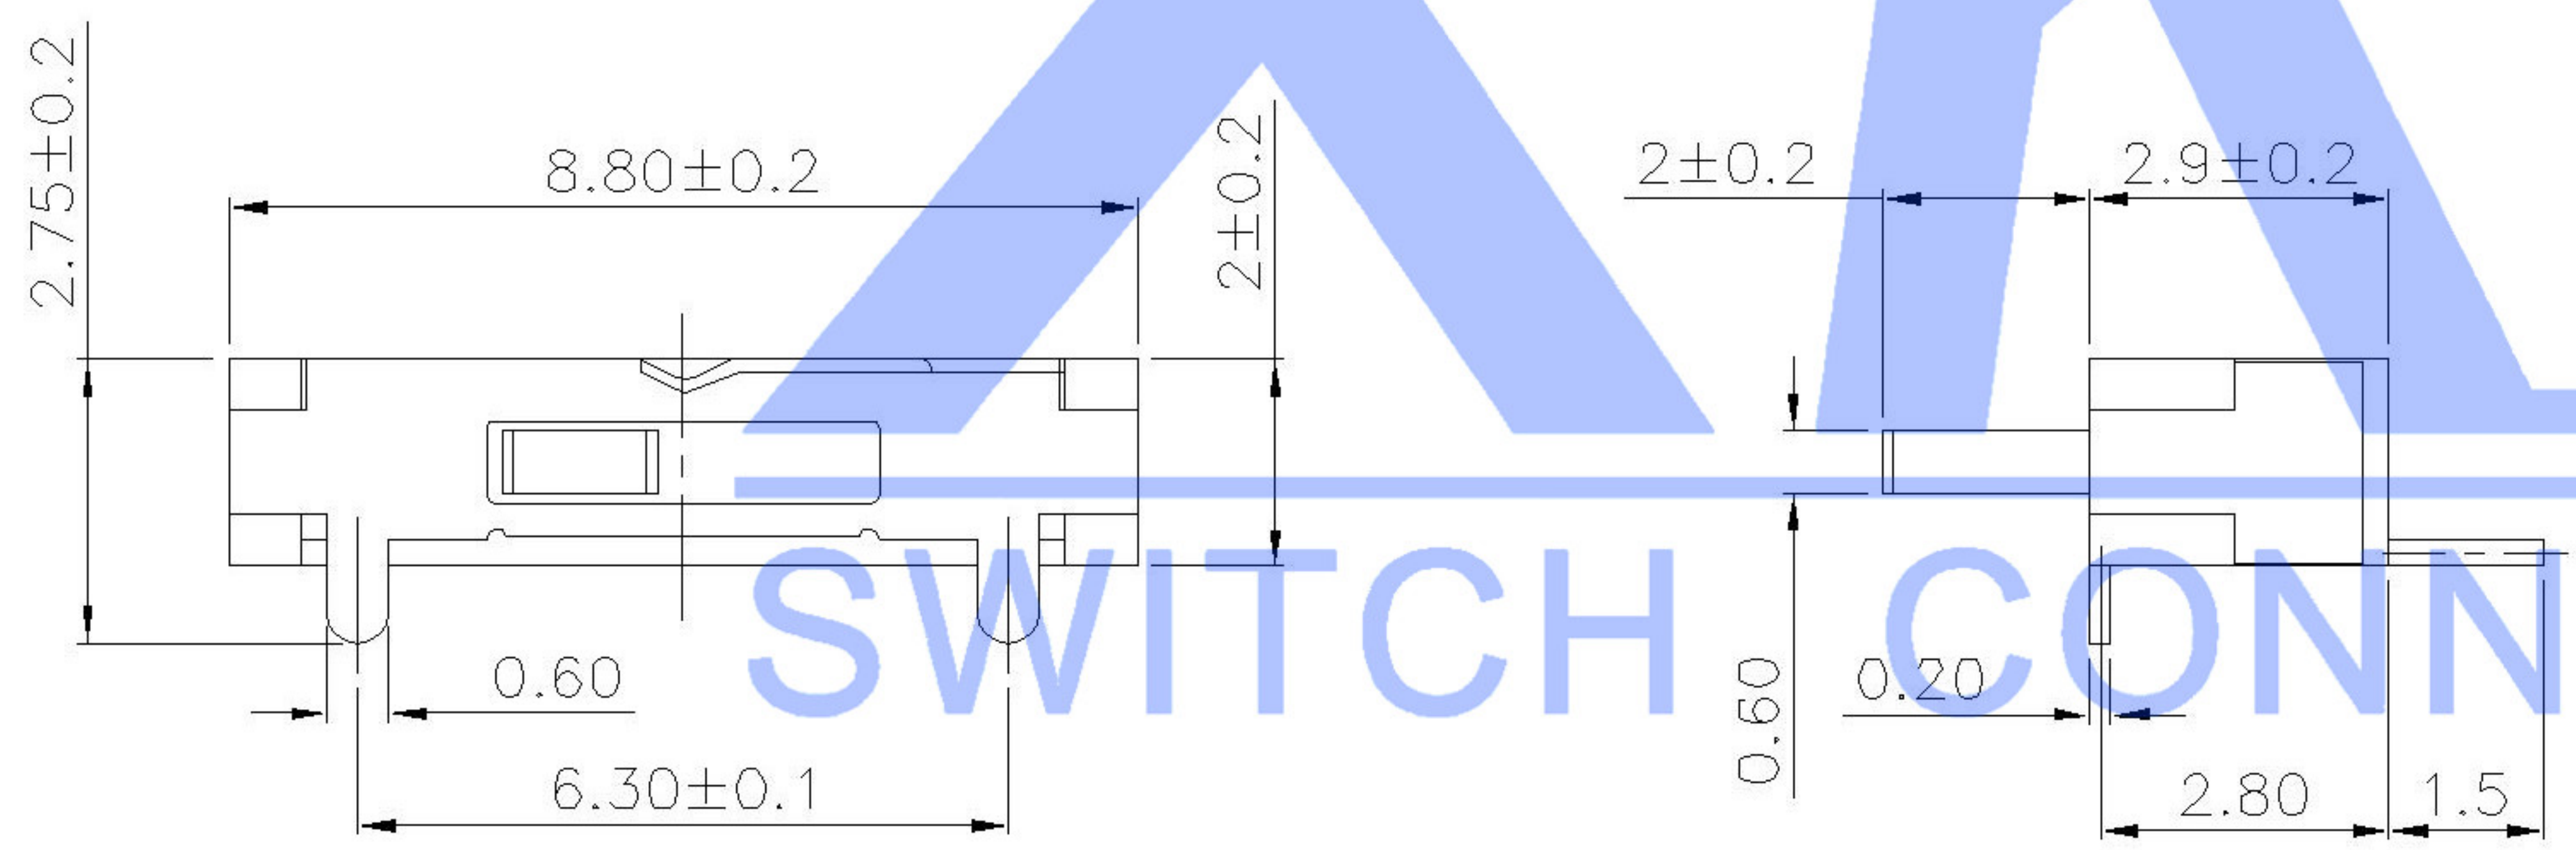

SWITCH CONNECTOR

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	3	Brass (0.30t)	ag Plated	—
④	Contact spring	—	1	Beryllium copper	—	—
③	Base	—	1	LCP	—	—
②	Cover	—	1	SUS	Tin plated	—
①	Keystake	—	1	PA46	—	—

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	DATE	SCALE: N/A	MODEL TYPE: SLIDE SWITCH
△x					ANGLAR ±5°	DWN	DATE	VIEW:	PART NO.:
△x					L ≤ 4 ±0.2	CHKD	DATE	UNIT: mm	DWG NO.:
△x					4 < L ≤ 16 ±0.3	APPD	DATE	SIZE: A4	SK-3270SB-X
					16 < L ≤ 63 ±0.4				WEIGHT 1.0g
					L > 63 ±0.5				SHEET 1/1
									REVISION A0