



P. C. B LAYOUT

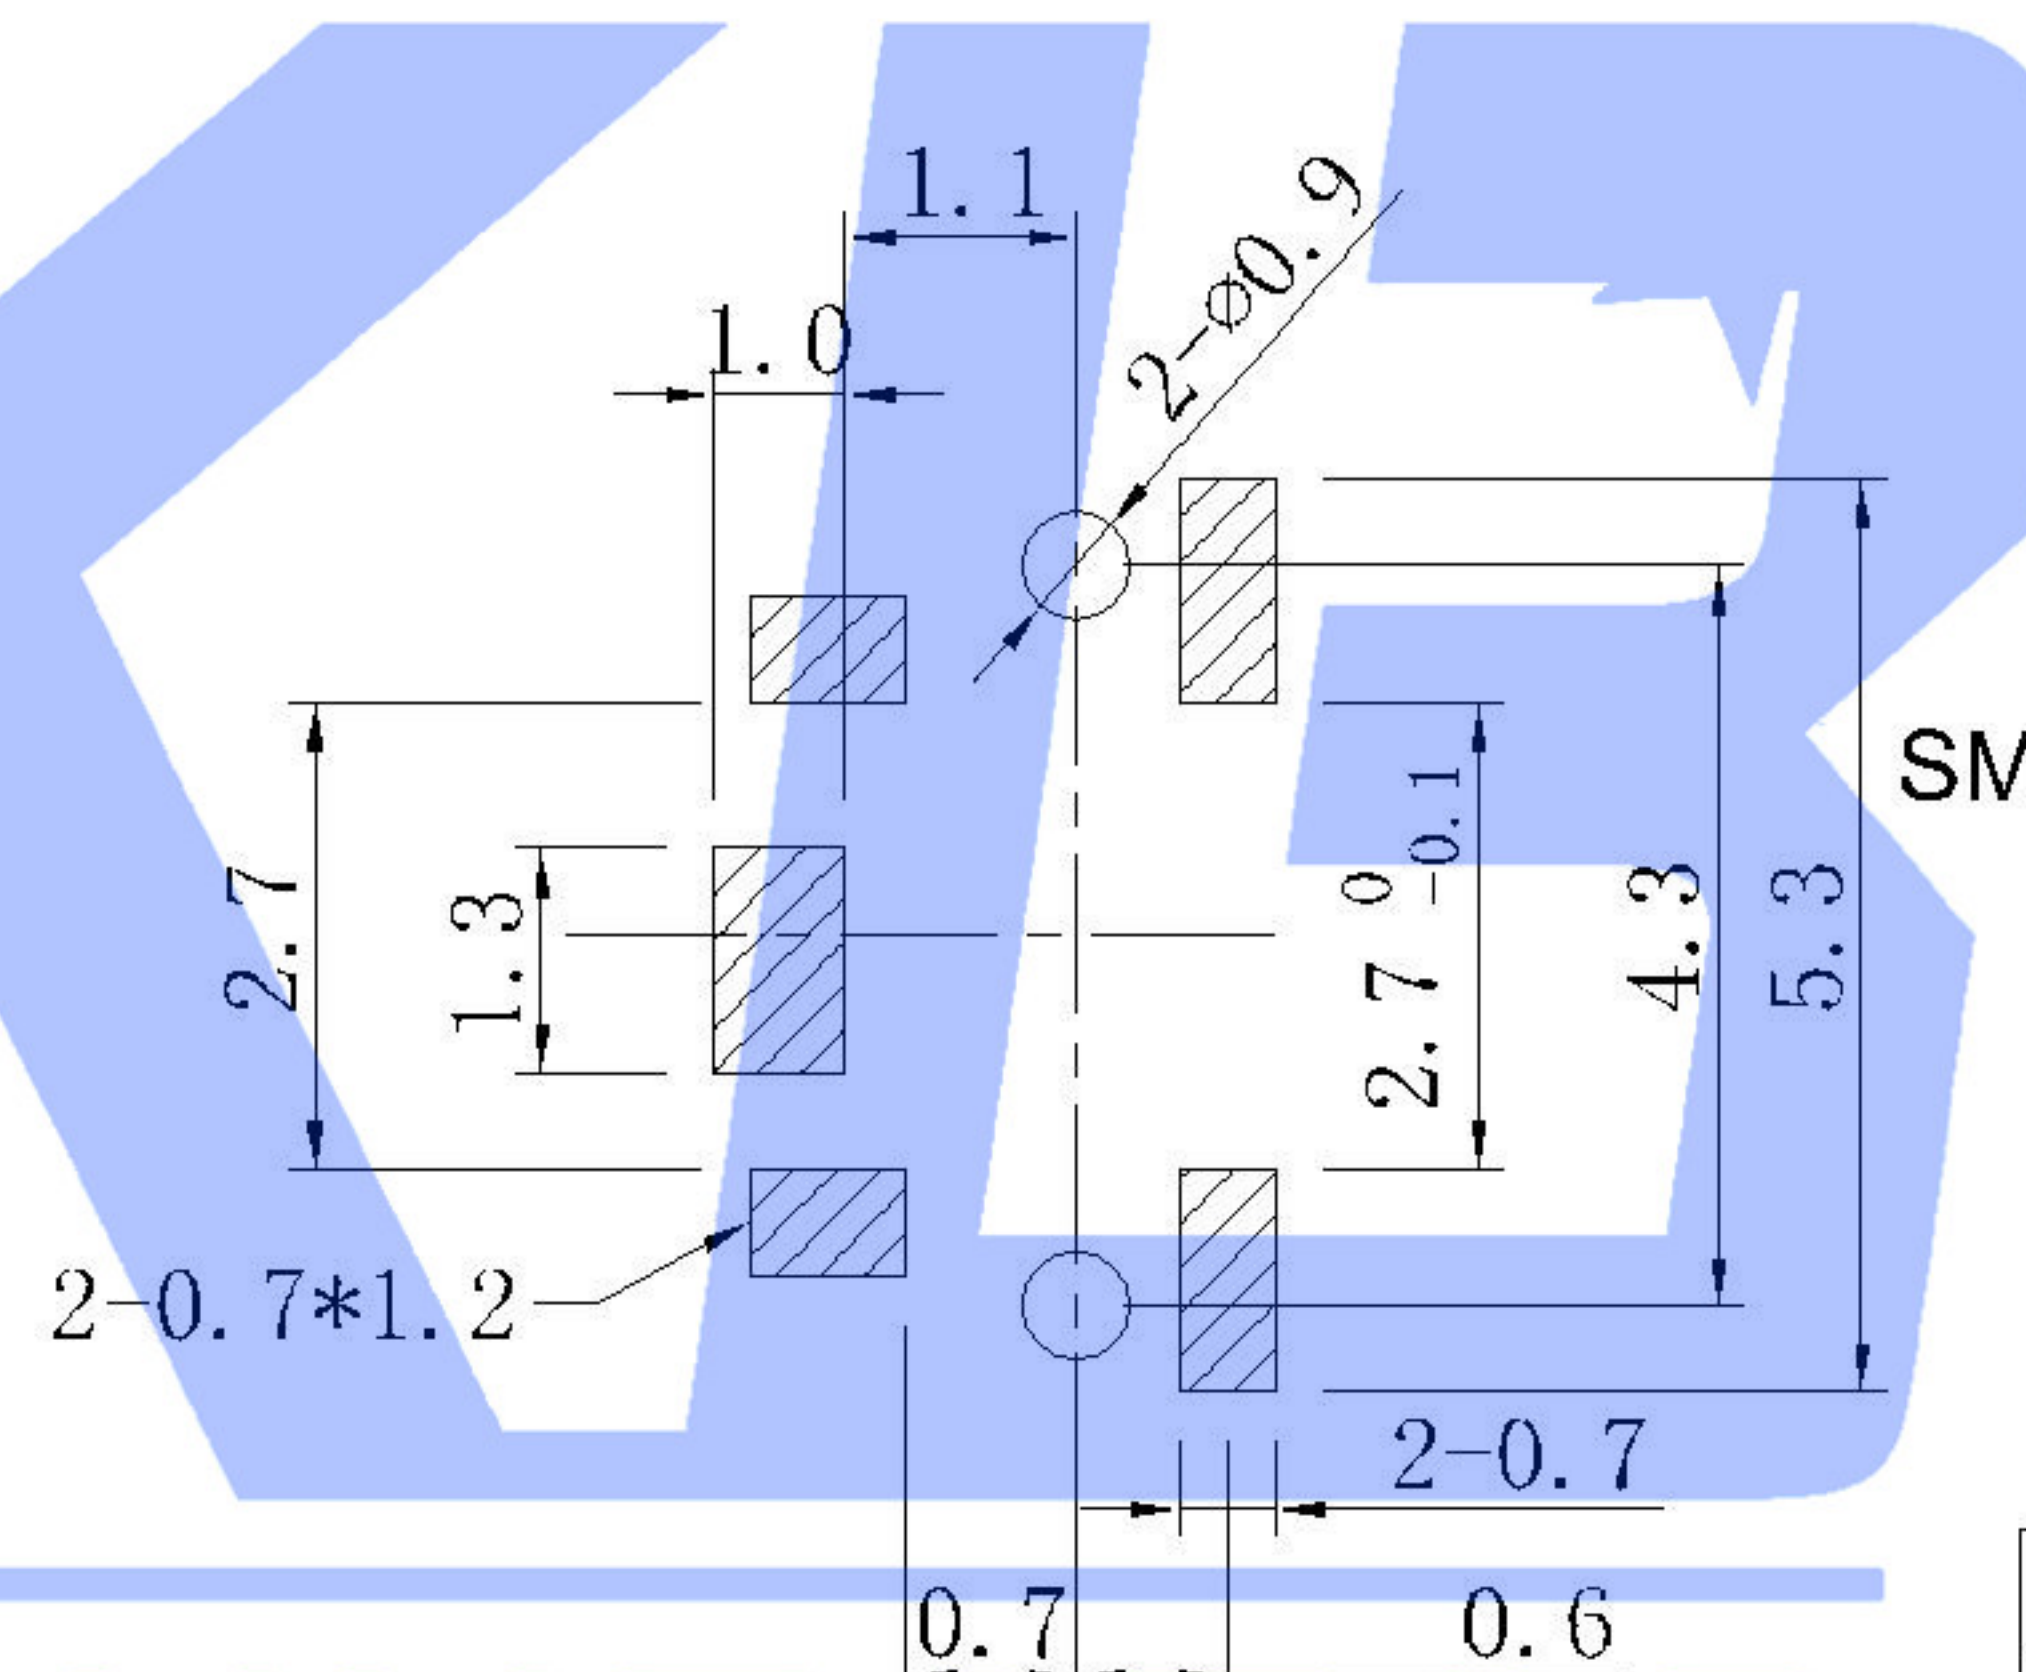

SMT TACK SWITCH

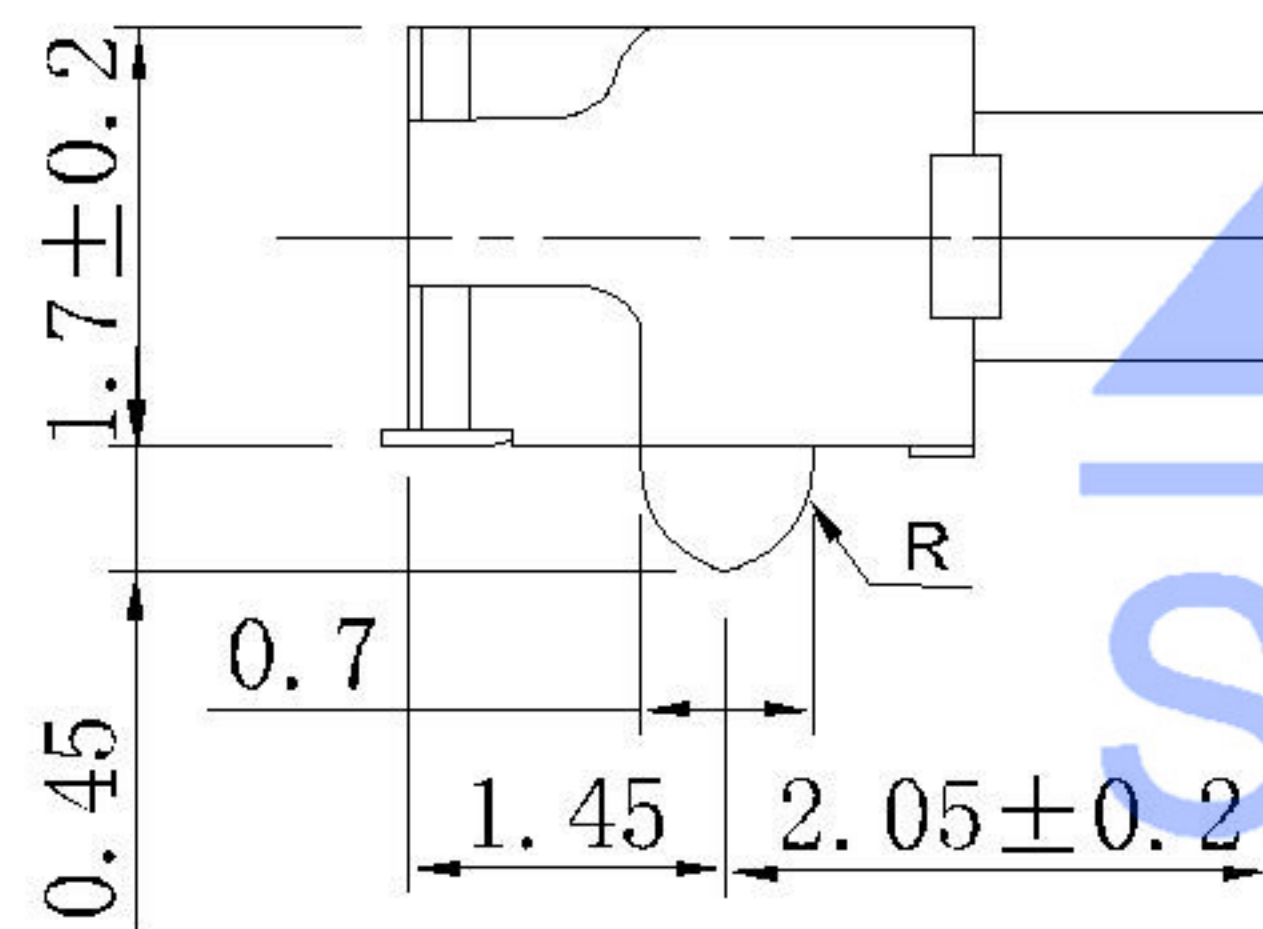

SPECIFICATION

| | |
|-----------------------|--------------------|
| Contact Rating | 50mA, 12V DC |
| Contact Resistance | 100mΩ max. |
| Insulation Resistance | 100MΩ min. 500V DC |
| Dielectric Strength | 250V AC/1 minute |
| Travel | 0.15mm |
| Operating Temp. | -25°C ~ +70°C |
| Storage Temp. | -30°C ~ +80°C |

| | |
|-----------------|----------------------------|
| PAPT NO | TS-1010A-X |
| Operating Force | A: 100gf B: 160gf C: 260gf |
| Height | H: 3.5 |
| | |

| ITEM | PAPT NAMF | TER.NO | QTY | MATERIAL | FINISHING | REMARK |
|------|-----------|--------|-----|---------------|------------|--------|
| ⑤ | Terminal | — | 2 | Brass (0.30t) | ag Plated | — |
| ④ | Contact | — | 2 | F.ag/SUS | — | — |
| ③ | Base | — | 1 | LCP | Natural | — |
| ② | Cover | — | 1 | Brass | Tin plated | — |
| ① | Keystake | — | 1 | LCP | — | — |

| | | | | | | |
|--------------------------------------|--|------|--|------------|-----------------------------------|----------|
| DSND | | DATE | | SCALE: N/A | MODEL TYPE: TACT SWITCH | |
| DWN | | DATE | | VIEW: | PART NO.: | |
| CHKD | | DATE | | UNIT: mm | DWG NO.: | |
| APPD | | DATE | | SIZE: A4 | TS-1010A-X | |
| | | | | WEIGHT | SHEET | REVISION |
| KXB INDUSTRIAL PRECISION CO.,LIMITED | | | | 1.0g | 1/1 | A0 |

| REVISIONS | DESCRIPTION | DATE | REVISED | APPROVED | UNSPECIFIED TOLERANCES |
|-----------|-------------|------|---------|----------|------------------------|
| | | | | | |
| | | | | | |
| | | | | | |

units: mm
 tolerance:
 X.X ±0.2mm
 X.XX ±0.1mm
 X.XXX ±0.05mm

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn