

| | |
|----------|-------------|
| Code-X | H |
| A | 3.15 |
| B | 3.85 |
| C | 4.85 |


SPECIFICATION

Contact Rating 50mA, 12V DC
 Contact Resistance 100mΩ max.
 Insulation Resistance 100MΩ min. 500V DC
 Dielectric Strength 250V AC/1 minute
 Travel 0.25mm
 Operating Temp. -25°C ~ +70°C
 Storage Temp. -30°C ~ +80°C

| | |
|-----------------|-------------------------|
| PAPT NO | TC-1101V-X-X-X |
| Operating Force | A:100gf B:160gf C:260gf |
| Height | H:A:3.15 B:3.85 C:4.85 |
| color | B:black W:white |

SWITCH CONNECTOR

Circuit diagram

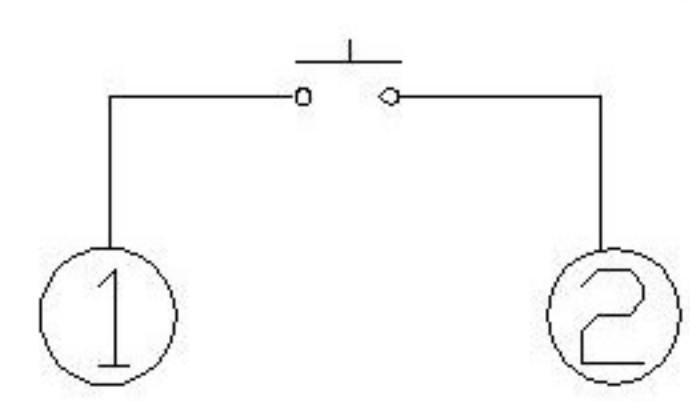

| ⑤ | Terminal | — | 2 | Brass (0.30t) | ag Plated | — |
|------|-----------|--------|-----|---------------|------------|--------|
| ④ | Contact | — | 1 | F.ag/SUS | | — |
| ③ | Base | — | 1 | PA46 | Natural | — |
| ② | Cover | — | 1 | Brass | Tin plated | — |
| ① | Keystake | — | 1 | PA46 | | — |
| ITEM | PAPT NAMF | TER,NO | QTY | MATERIAL | FINISHING | REMARK |

| | | | | | | | |
|------------------------|--|------|--|---|-----------------------------------|--------------|----------------|
| DSND | | DATE | | SCALE: N/A | MODEL TYPE: TACT SWITCH | | |
| DWN | | DATE | | VIEW: | PART NO.: | | |
| CHKD | | DATE | | UNIT: mm | DWG NO.: | | |
| APPD | | DATE | | SIZE: A4 | TC-1101V-X-X-X | | |
| UNSPECIFIED TOLERANCES | | | | XKB INDUSTRIAL PRECISION CO.,LIMITED | WEIGHT 1.0g | SHEET 1/1 | REVISION A0 |

| units: mm | | | | |
|---|-------------|------|---------|----------|
| tolerance: | | | | |
| X.X | ±0.2mm | | | |
| X.XX | ±0.1mm | | | |
| X.XXX | ±0.05mm | | | |
| MARK | DESCRIPTION | DATE | REVISED | APPROVED |
| REVISIONS | | | | |
| www.xk-dg.cn www.helloxkb.com www.helloxkb.cn | | | | |