

PRODUCT SPECIFICATION	DATE:	2009/06/24	PAGE:	1/8
PRODUCT NO A3963 SERIES				
<p>-Index-</p> <ol style="list-style-type: none"> 1. Scope 2. Part name & part number 3. Construction! dimensions! material & surface finish 4. Characteristics 5. Conditions 6. Mechanical test <ol style="list-style-type: none"> 6.1 Crimp width! crimp height & crimp strength 6.2 Insertion force & withdrawal force 6.3 Contact retention force 6.4 Post retention force 7. Electrical test <ol style="list-style-type: none"> 7.1 Contact resistance 7.2 Insulation resistance 7.3 Dielectric withstanding voltage 8. Environmental test <ol style="list-style-type: none"> 8.1 Humidity 8.2 Salt spray 8.3 Thermal shock 8.4 Vibration 8.5 Solderability 8.6 Resistance to soldering heat 8.7 Heat Resistance 8.8 Cold Resistance 8.9 Glow Wire(Only for GWT 750°C products) 				
Approved by: RuiQing.X _____	Reviewed by: XunZhi.J _____	Produced by: Jian.G _____		

PRODUCT SPECIFICATION

DATE: 2009/06/24

PAGE:

2/8

PRODUCT NO : A3963 SERIES

1. Scope :

This product specification contains the test results that general performances of A3963 SERIES connector were examined.

2. Part name & part number :

Part name	Part number
Housing	A3963H A3963HA A3963HM
Terminal	A3963-T A3963-T-H A3963M-T
Wafer	A3963WV A3963WR A3963WVD A3963WRD

3. Construction 、 dimensions 、 material & surface finish :

Construction and dimensions shall be in accordance with the referenced drawings.

Material and surface finish shall be as specified below.

Part name		Material	Surface finish
Housing		Nylon 66	UL 94V-0
Terminal		Phosphor Bronze	Tin-plated
		Brass	Tin-plated
Wafer	Post	Brass	Tin-plated
	Body	Nylon 66/PBT+30%GF	UL 94V-0

4. Characteristics :

Current rating : 10A AC,DC(AWG#16)

Voltage rating : 250V AC,DC

Temperature range : -40° C ~ +105° C

5. Conditions :

The conditions shall be in accordance with the referenced drawing of next page.

Number	Item	Requirement
(1)	Bend up	4° max.
	Bend down	4° max.
	Twisting	3° max.
	Rolling	8° max.
(2)	Bell mouth (flare)	0.2-0.5 mm
(3)	Cut-off tab length	0.2 mm max.
(4)	Extruded wire length	0-1.5 mm
(5)	Seam	Seam shall not be opened and no wire allowed out of crimping area
	Wire strip length	1.2-1.7 mm ref.
(8)	Lance height	0.3 mm ref.

PRODUCT SPECIFICATION	DATE: 2009/06/24	PAGE:	3/8
------------------------------	------------------	-------	-----

PRODUCT NO : A3963 SERIES

6. Mechanical test :

6.1 Crimp width、crimp height & crimp strength

After crimping, the crimped areas [(6)、(7)] should be as follows.

Wire Size (AWG)	Terminal Part Number	Conductor(mm)		Insulation(mm)		Crimp Strength (Kg)
		Crimp Width	Crimp Height	Crimp Width	Crimp Height	
#16	A3963-T-H A3963-T A3963M-T	1.75±0.15	1.35~1.45	2.60 (max)	2.75(max)	10.00(min)
#18			1.10~1.25		2.60(max)	9.00(min)
#20			1.05~1.10		2.45(max)	7.00(min)
#22			0.95~1.00		2.30(max)	4.00(min)

Note : no distorted after terminal crimped.


6.2 Insertion force (I.F.) & withdrawal force (W.F.)

(1) Requirement :

Number of Circuits	At initial		At 50th
	I.F. (max)	W.F. (min)	W.F. (min)
Single	1.50kg	0.20kg	0.15kg
2	2.50kg	0.40kg	0.30kg
3	3.50kg	0.60kg	0.50kg
4	4.50kg	0.80kg	0.70kg
5	5.50kg	1.00kg	0.90kg
6	6.50kg	1.20kg	1.10kg
7	7.50kg	1.40kg	1.30kg
8	8.00kg	1.60kg	1.50kg
9	9.00kg	1.80kg	1.70kg
10	10.00kg	2.00kg	1.90kg
11	11.00kg	2.20kg	2.10kg
12	12.00kg	2.40kg	2.30kg
13	13.00kg	2.60kg	2.50kg
14	14.00kg	2.80kg	2.70kg
15	15.00kg	3.00kg	2.90kg

(2) Test method : Housing with crimped terminal and wafer shall be mated and unmated on the same axis. Initial insertion and withdrawal forces and withdrawal forces at 50th shall be measured for single circuit and multi-circuits. For the measurement of single circuit, housing lock shall be removed.

Insertion and withdrawal speed : 20±5 mm/minute.

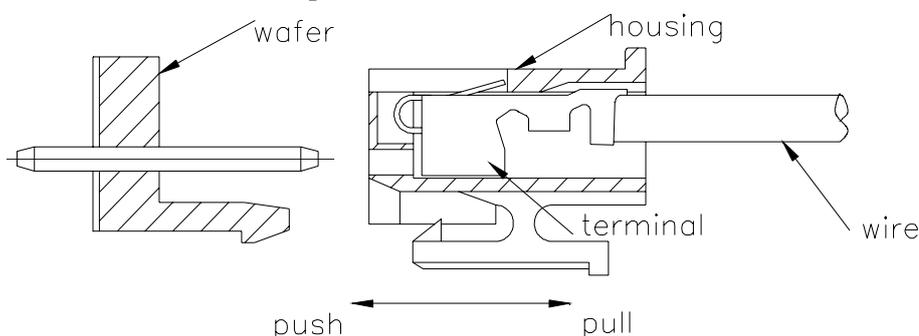



PRODUCT SPECIFICATION	DATE: 2009/06/24	PAGE:	4/8
------------------------------	------------------	-------	-----

PRODUCT NO : A3963 SERIES

(3) Test results :

Number of Circuits		At initial		AT 50th	N=20
		I.F. (kg)	W.F. (kg)	W.F. (kg)	
Single	Max.	0.76	0.75	0.68	
	Min.	0.57	0.39	0.35	
	Ave.	0.69	0.59	0.53	
2	Max.	1.46	1.55	1.43	
	Min.	1.05	1.22	1.12	
	Ave.	1.28	1.36	1.2	
3	Max.	2.3	2.69	2.53	
	Min.	1.76	1.41	1.29	
	Ave.	2.01	2.01	1.88	
4	Max.	3.39	3.12	2.99	
	Min.	2.41	1.75	1.63	
	Ave.	2.79	2.43	2.35	
5	Max.	3.86	3.73	3.57	
	Min.	2.74	2.46	2.35	
	Ave.	3.18	2.99	2.87	
6	Max.	4.27	3.8	3.76	
	Min.	3.27	2.77	2.61	
	Ave.	3.66	3.57	3.46	
7	Max.	4.97	4.29	4.12	
	Min.	4.04	3.68	3.53	
	Ave.	4.34	3.89	3.76	
8	Max.	5.42	5.32	5.21	
	Min.	4.34	3.38	3.16	
	Ave.	4.76	4.38	4.25	
9	Max.	5.85	5.65	5.52	
	Min.	4.65	3.66	3.51	
	Ave.	5.24	4.64	4.53	
10	Max.	6.57	5.9	5.82	
	Min.	5.39	4.22	4.1	
	Ave.	6.03	5.17	5.03	
11	Max.	6.97	6.41	6.28	
	Min.	6.07	5.17	5.03	
	Ave.	6.45	5.62	5.46	
12	Max.	7.53	7.38	7.25	
	Min.	6.42	5.86	5.81	
	Ave.	7.12	6.73	6.56	
13	Max.	8.49	8.37	8.21	
	Min.	7.02	6.63	6.51	
	Ave.	7.8	7.43	7.24	
14	Max.	9.69	8.78	8.56	
	Min.	8.14	7.78	7.65	
	Ave.	8.77	8.18	8.02	
15	Max.	10.26	10.5	10.25	
	Min.	8.11	7.2	7.03	
	Ave.	9.19	9.18	9.01	

PRODUCT SPECIFICATION

DATE: 2009/06/24


PAGE:

5/8

PRODUCT NO : A3963 SERIES

6.3 Contact retention force

- (1) Requirement : 2.50 Kg (min.)
- (2) Test method : Crimped terminal shall be mounted in a housing and pulled in an alignment. The load to pull the terminal out of the housing shall be measured.

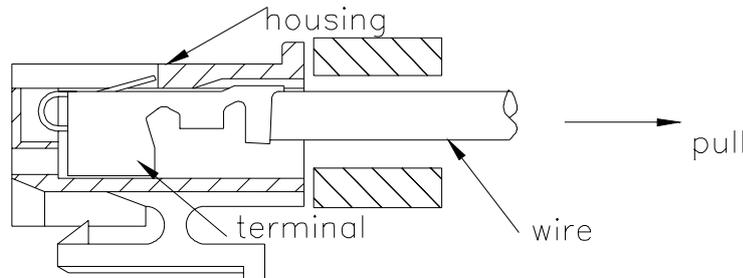


(3) Test results

Max.	Min.	Ave.	N=10
6.12	4.11	5.28	

6.4 Post retention force

- (1) Requirement : 2.50 Kg (min.)
- (2) Test method : The end of a post shall be pushed in a perpendicular to wafer. The load to make the post start moving shall be measured.

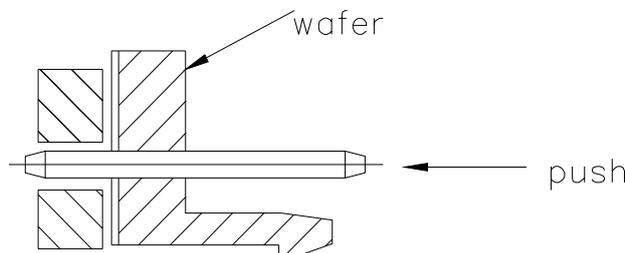

(3) Test results :

Max.	Min.	Ave.	N=10
6.24	4.50	5.32	

7. Electrical test :

7.1 Contact resistance

- (1) Requirement : Initial : 10 mΩ (max.)
After environmental test : 20 m Ω (max.)
- (2) Condition : Test current : 10 mA (DC)
Open voltage : 20mV (max.)
- (3) Test result : See items 8.1 ~ 8.4

7.2 Insulation resistance

- (1) Requirement : Initial : 1000 MΩ (min.)
After humidity test : 500 MΩ (min.)
After thermal shock test : 500 MΩ (min.)
- (2) Test method : DC 1500V shall be applied between outer surface of housing and terminal and between adjacent terminals to measure insulation resistance.
(MIL-STD-202 , test method 302 , condition B)
- (3) Test result : See items 8.1 & 8.3

PRODUCT SPECIFICATION

DATE: 2009/06/24

PAGE:

6/8

PRODUCT NO : A3963 SERIES

7.3 Dielectric withstanding voltage

- (1) Requirement : There shall be no breakdown nor flashover.
- (2) Test method : Initially AC 1500V (rms) and after humidity and thermal shock tests AC 500V (rms) shall be applied between outer surface of housing and terminal and between adjacent terminals for one minutes. (MIL-STD-202 , test method 301)
Test current : 1mA
- (3) Test result : See items 8.1 & 8.3

8. Environment test :

8.1 Humidity

- (1) Requirement : Contact resistance shall be 20 milliohms (max.) after the test. Insulation resistance shall be 500 megohms (min.) after the test. There shall be no breakdown nor flashover on dielectric withstanding voltage test.
- (2) Test method : Mated connector shall be placed in a humidity chamber of the following conditions. After the test , contact resistance , insulation resistance and dielectric withstanding voltage shall be measured. (MIL-STD-202 , test method 103 , condition A)
Temperature : 40 ± 2 °C
Humidity : 90% ~ 95% (RH)
Period : 240 hours continuously

(3) Test results :

Test item	Initial (mΩ)			After test (mΩ)		
	Max.	Min.	Ave.	Max	Min	Ave
Contact resistance	6.25	4.12	4.22	6.30	4.15	4.30

N=30

Test item	Housing-Terminal (MΩ)		Terminal-Terminal (MΩ)	
	Initial	After test	Initial	After test
Insulation resistance	1000min	500min	1000min	500min

N=20

Test item	Housing-Terminal (MΩ)		Terminal-Terminal (MΩ)	
	Initial	After test	Initial	After test
D.W.V.	Good	Good	Good	Good

N=20

(D.W.V. : Dielectric withstanding voltage)

8.2 Salt spray

- (1) Requirement : Contact resistance shall be 20 milliohms (max.) after the test.
- (2) Test method : Mated connector shall be subjected to salt spray test of the following conditions. After the test, specimen shall be washed with running water and dried naturally before the measurement of contact resistance.
Temperature : 40 ± 2 °C
Humidity : 90% ~ 95% (RH)
Period : 8 or 16 or 24 or 32 or 48 hours

(3) Test result :

Test item	Initial (mΩ)			After test (mΩ)		
	Max.	Min.	Ave.	Max.	Min	Ave.
Contact resistance	5.89	3.57	4.18	6.27	4.06	4.53

N=30

PRODUCT SPECIFICATION	DATE: 2009/06/24	PAGE:	7/8
------------------------------	------------------	-------	-----

PRODUCT NO : A3963 SERIES

8.3 Thermal shock

(1) Requirement : Contact resistance shall be 20 milliohms (max.) after the test. Insulation resistance shall be 500 megohms (min.) after the test. There shall be no breakdown nor flashover on dielectric withstanding voltage test.

(2) Test method : Mated connector shall be subjected to thermal shock test of the following conditions. After the test , contact resistance , insulation resistance and dielectric withstanding voltage shall be measured.

1 cycle consists of :

-55 °C for 30 minutes

+85 °C for 30 minutes

Times of cycles : 25 cycles

(3) Test results :

Test item	Initial (mΩ)			After test (mΩ)		
	Max.	Min.	Ave.	Max.	Min	Ave.
Contact resistance	5.79	3.94	4.21	5.83	3.97	4.34

N=30

Test item	Housing-Terminal (MΩ)		Terminal-Terminal (MΩ)	
	Initial	After test	Initial	After test
Insulation resistance	1000min	500min	1000min	500min

N=20

Test item	Housing-Terminal (MΩ)		Terminal-Terminal (MΩ)	
	Initial	After test	Initial	After test
D.W.V.	Good	Good	Good	Good

N=20

D.W.V. : Dielectric withstanding voltage

8.4 Vibration

(1) Requirements : Contact resistance shall be 20 milliohms (max.) after the test. There shall be no current discontinuity longer than 1 microsecond during the test.

(2) Test method : Mated connector shall be mounted on a PCB and subjected to a vibration test of the following conditions. During the test , current continuity shall be checked. After the test , contact resistance shall be measured.

(MIL-STD-202 , test method 201)

Frequency : 10~55~10 Hz/min.

Amplitude : 1.5 mm

Direction : 1. Axis of up and down

2. Axis of right and left

3. Axis of front and back

(3) Test result :

Test item	Initial (mΩ)			After test (mΩ)		
	Max.	Min.	Ave.	Max.	Min	Ave.
Contact resistance	6.41	3.79	4.58	6.73	4.18	4.67

N=30

Current discontinuity : There shall be no current discontinuity longer than 1 microsecond during the test.

PRODUCT SPECIFICATION

DATE: 2009/06/24

PAGE:

8/8

PRODUCT NO : A3963 SERIES

8.5 Solderability

- (1) Requirements : Solder-dipping section shall be covered by solder entirely.
- (2) Test method : Fluxed soldering section of shrouded header shall be dipped in solder of the following conditions.
- Solder temperature : 235 ± 5 °C
Immersion period : 3-5 seconds

(3) Test result : Good.

8.6 Resistance to soldering heat

- (1) Requirements : There shall be no deformation nor damage which may affect the performance.
- (2) Test method : Specimen shall be mounted on a PCB (inserted only) and subjected to resistance to soldering heat test of the following conditions.
- Solder temperature : 260 ± 5 °C
Immersion period : 3-5 seconds

(3) Test result : Good.

8.7 Heat Resistance

(1)Requirement

Appearance: No damage.
Contact resistance: 0.02Ω Max.

(2)Test Condition

Mate connector exposed to the condition of 105 ± 2 °C for 96 hours.Recovery time 1~2 hours
GB/T 5095.6 Method 11i / EIA-364-17B

(3)Test result:Good.

8.8 Cold Resistance

(1)Requirement

Appearance: No damage.
Contact resistance: 0.02Ω Max.

(2)Test Condition

Mate connector exposed to the condition of -40 ± 2 °C for 96 hours.Recovery time 1~2 hours
GB/T 5095.6 Method 11i / EIA-364-17B

(3)Test result:Good.

8.9 Glow Wire(Only for GWT 750°C products)

(1)Requirement

- 1.The time that mated connector burns is not more than 2s.
- 2.30s after glow wire leaves mated connector, it does not burn or is no incandescence and it does not fall something or falling something does not burn.

(2)Test Condition

750°C glow wire contacts with mated connector,
Time: (30 ± 1) s
Speed of closing to and leaving: 10mm/s~25mm/s
Depth that glow wire penetrates mated connector: (7 ± 0.5) mm
GB/T 5169.10

(3)Test result:Good.