
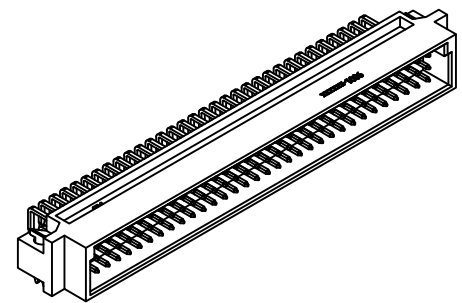


REV.	SPECIFICATION	ECN NO.	APPD.
R6		ECN191115	

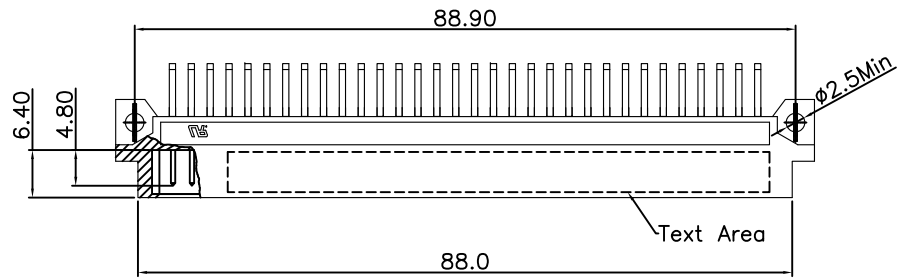




Material and Plating:

Housing: PBT, UL94V-0, Beige .
 Contacts: Brass.
 Lock: Phosphor Bronze.
 Gold Plated on Contact Area and 80u" Min Tin or
 Gold Flash Plated on solder tail over 50u" Min Nickel.

Electrical Characteristics:

Current Rating: 2 AMP.
 Dielectric Withstanding Voltage: AC 1000V For 1 minute.
 Insulator Resistance: 10⁶MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C~+125°C .

***RoHS Compliant**

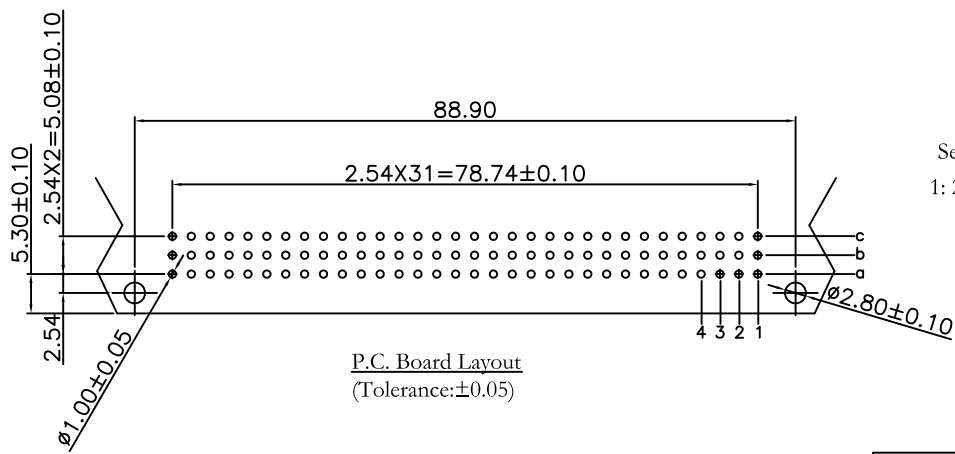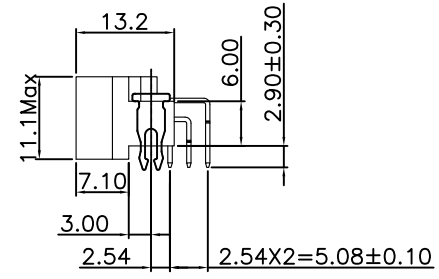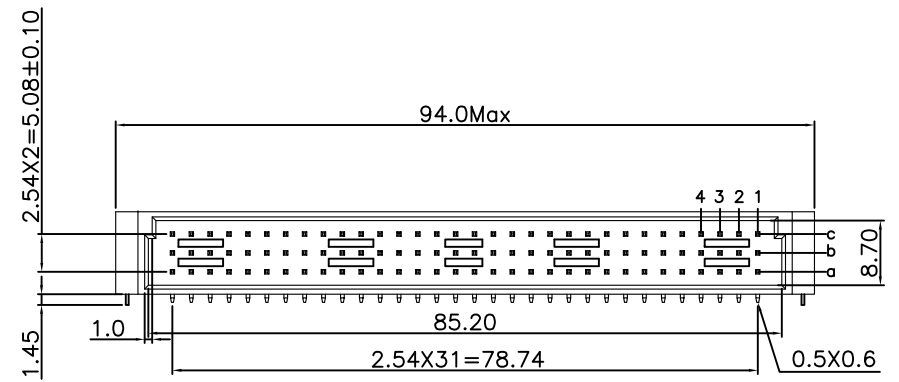

Series: 9001- 1 1 xx 1 C xx L1 A
 1: 2.54mm
 1: Male
 Position: xx, C, L1, A
 A: Tray Package
 Blank: W/O Lock
 L1: With Lock
 1: Dip Length
 C: Dip Tin Plated
 Contact Gold Plated
 G: Gold Plated
 00: G/F
 10: 10 1/2"
 15: 15 1/2"
 30: 30 1/2"

Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	96	a b c		9001-11961C~
	64	a - c		9001-11641C~
	32	a - -		9001-11321C~

Tolerances	Dwg. No.	9001D11001	
x = ±0.5	Projection		
.x = ±0.25	Unit	mm	Scale 1:1
.xx = ±0.15	Drawn By	WQ 11/26'19	

Title: 9001 Series
 DIN41612
 C Type Male

OUPIN
 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.
 P/N: 9001-11xx1CxxL1A
 SHEET 1/1 Ver. No. R6