

**DESCRIPTION**



- Low Collector Saturation Voltage-  
:  $V_{CE(sat)} = 2.0V(\text{Min}) @ I_C = 7A$
- Good Linearity of  $h_{FE}$
- Complement to Type 2SA1941

**APPLICATIONS**

- Power amplifier applications
- Recommend for 70W high fidelity audio frequency amplifier output stage applications

**ABSOLUTE MAXIMUM RATINGS( $T_a = 25^\circ C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	140	V
$V_{CEO}$	Collector-Emitter Voltage	140	V
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_C$	Collector Current-Continuous	10	A
$I_B$	Base Current-Continuous	1	A
$P_C$	Collector Power Dissipation @ $T_c = 25^\circ C$	100	W
$T_J$	Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ C$

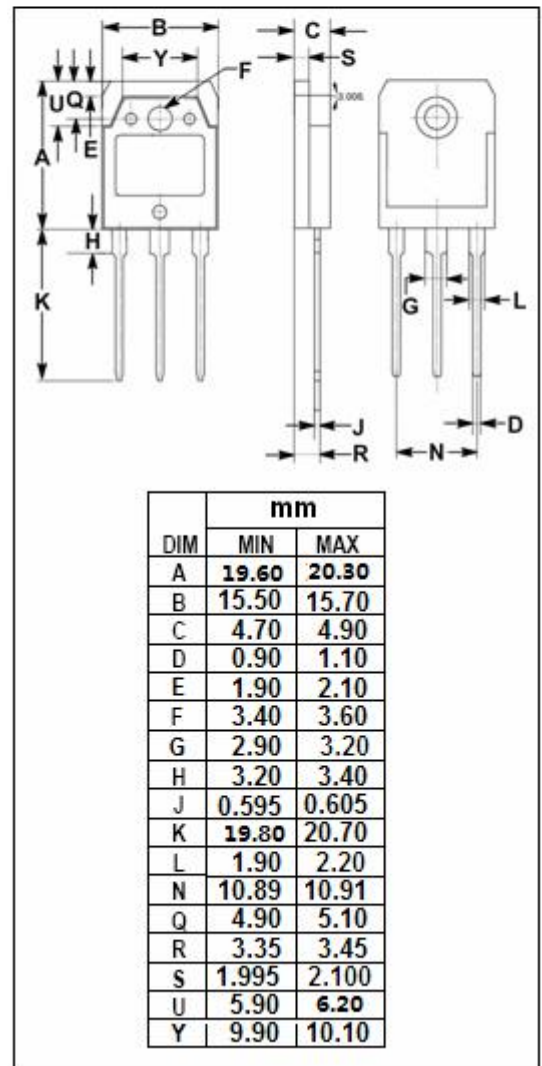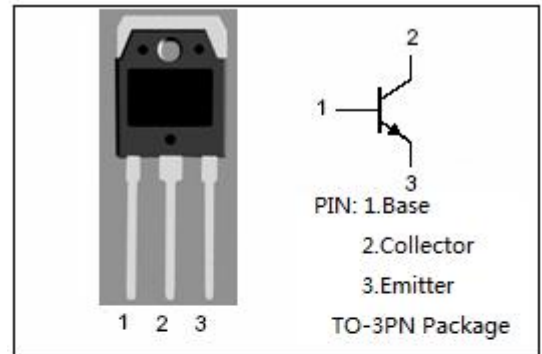

**ELECTRICAL CHARACTERISTICS**

$T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C= 50\text{mA}$ ; $I_B= 0$	140			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 7\text{A}$ ; $I_B= 0.7\text{A}$			2.0	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C= 5\text{A}$ ; $V_{CE}= 5\text{V}$			1.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}= 140\text{V}$ ; $I_E=0$			5	$\mu\text{A}$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}= 5\text{V}$ ; $I_C=0$			5	$\mu\text{A}$
$h_{FE-1}$	DC Current Gain	$I_C= 1\text{A}$ ; $V_{CE}= 5\text{V}$	55		160	
$h_{FE-2}$	DC Current Gain	$I_C= 5\text{A}$ ; $V_{CE}= 5\text{V}$	35			
$C_{OB}$	Output Capacitance	$I_E=0$ ; $V_{CB}= 10\text{V}$ ; $f_{test}= 1.0\text{MHz}$		170		pF
$f_T$	Current-Gain—Bandwidth Product	$I_C= 1\text{A}$ ; $V_{CE}= 5\text{V}$		30		MHz

◆  **$h_{FE-1}$  Classifications**

R	0
55-110	80-160