

**DESCRIPTION**



- Low Collector Saturation Voltage-  
:  $V_{CE(sat)} = 0.6V(\text{Max.})@I_C = 5A$
- Fast Switching Speed
- Complement to Type 2SA1261

**APPLICATIONS**

- Developed for high-voltage high-speed switching, and is ideal for use as a driver in devices such as switching regulators, DC/DC converters, and high frequency power amplifiers.

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	150	V
$V_{CEO}$	Collector-Emitter Voltage	100	V
$V_{EBO}$	Emitter-Base Voltage	7.0	V
$I_C$	Collector Current-Continuous	10	A
$I_{CM}$	Collector Current-Peak	20	A
$I_B$	Base Current-Continuous	3.5	A
$P_C$	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	1.5	W
	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	60	
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

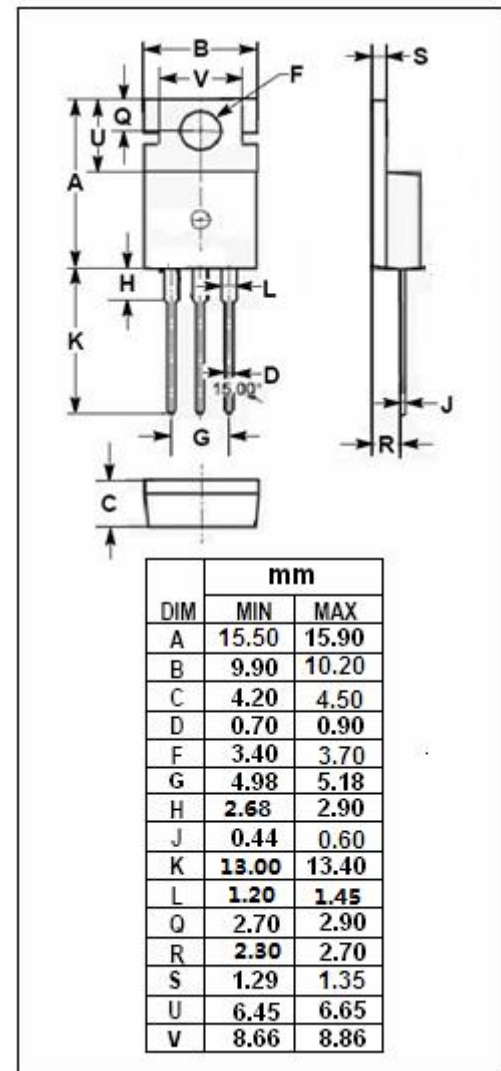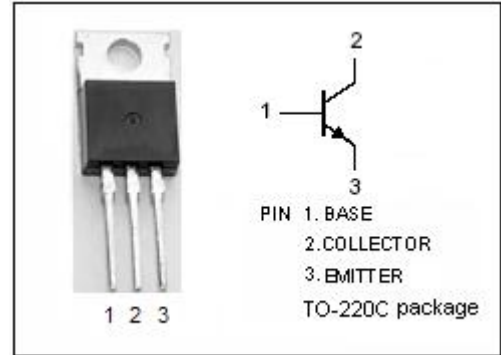

**ELECTRICAL CHARACTERISTICS**

$T_c=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C= 50\text{mA}; I_B= 0$	100		V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 5.0\text{A}; I_B= 0.5\text{A}$		0.6	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C= 5.0\text{A}; I_B= 0.5\text{A}$		1.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}= 100\text{V}; I_E= 0$		10	$\mu\text{A}$
$I_{CEX}$	Collector Cutoff Current	$V_{CE}= 100\text{V}; V_{BE(off)}= -1.5\text{V}$ $V_{CE}= 100\text{V}; V_{BE(off)}= -1.5\text{V}, T_a=125^{\circ}\text{C}$		10 1.0	$\mu\text{A}$ mA
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}= 5\text{V}; I_C= 0$		10	$\mu\text{A}$
$h_{FE-1}$	DC Current Gain	$I_C= 0.5\text{A}; V_{CE}= 5\text{V}$	40	200	
$h_{FE-2}$	DC Current Gain	$I_C= 3.0\text{A}; V_{CE}= 5\text{V}$	40	200	
$h_{FE-3}$	DC Current Gain	$I_C= 5.0\text{A}; V_{CE}= 5\text{V}$	20		

Switching times

$t_{on}$	Turn-on Time	$I_C= 5.0\text{A}, R_L= 10\ \Omega,$ $I_{B1}= -I_{B2}= 0.5\text{A}, V_{CC}\approx 50\text{V}$		0.5	$\mu\text{s}$
$t_{stg}$	Storage Time			1.5	$\mu\text{s}$
$t_f$	Fall Time			0.5	$\mu\text{s}$

◆  **$h_{FE-2}$  Classifications**

M	L	K
40-80	60-120	100-200