


SECTION A-A

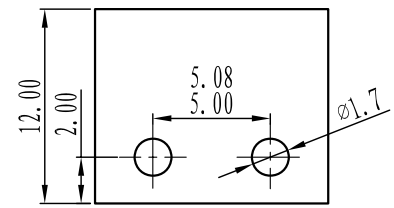

电气性能/Electrical

- 参考标准/Standard: UL IEC
- 额定电压/Rated voltage: 300V 320V
- 额定电流/Rated current: 15A 20A
- 接触电阻/Contact resistance: 20mΩ
- 耐电压/Withstanding voltage: AC2000V/1Min
- 绝缘电阻/Insulation resistance: 500MΩ/DC500V

机械性能/Mechanical

- 温度范围/Temp.Range: -40° C ~ +105° C
- 瞬间温度/MAX Soldering: +250° C, for 5 Sec


尺寸/Dimensions

- 间距/Pitch: 5.00mm, 5.08mm
- 极数/Poles: 2P-24P

材质及电镀/Material

- 塑件/Housing: PA66, UL94V-0
- 焊针/Pin header: Brass, Tin plated

订购方式:
HOW TO ORDER

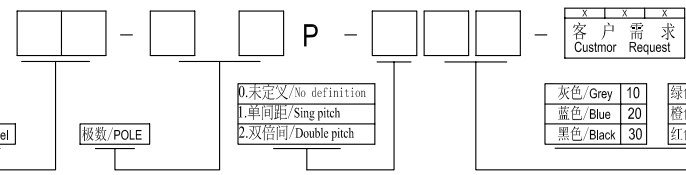

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension				fillet	chamfer	∠ short angle sid	≡	-	∥	⊥					
	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all to 6	over 6 to 10	over 10 to 50	over 50 to 120	all to 5	over 5 to 30	over 30 to 120					
tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1'	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	第一视角/FIRST ANGLE PROJECTION	
Cixi Dibo Electronics Co.,LTD					名称/NAME	
					DB2ER-5.08-XXP-F	

灰色/Grey	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	橙色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90