


技术参数 SPECIFICATIONS

- 线数 (Poles) : 2~13
- 适用线规 (Applicable wires) : AWG30#~22#
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 2A
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1000V.Ac/1min
- 材料 (Material) :
孔座 (Housing) : 尼龙 (Nylon) UL94V-2(0)
针座 (Wafer) : PA-9T UL94V-0
- 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)
- 包装方式 (Package) : 贴片 (Wafer)
散装 Loosen Package
管装 Pipe Package
编带 Tape And Reel Package


端子 TERMINAL (PH)

型号 Type	适用线规 Applicable wires mm ²	适用线规 AWG#	电线外径 O.D of wire ins mm	数量 Quantity
HX20006-PT	0.05~0.22	30~24	0.9~1.5	10000PCS/盘
HX20006-3IPT	0.2~0.33	24~22	1.3~1.6	10000PCS/盘


HX20006-PT(PH)

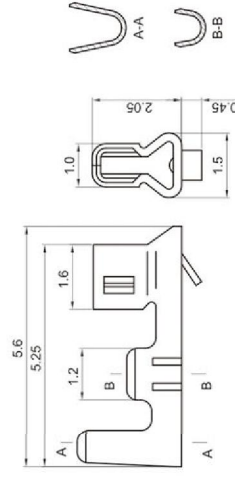


HX20006-Y(PH)

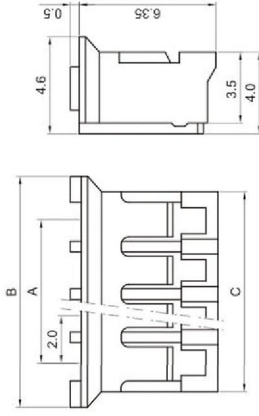


HX20007-AB(PH)立贴

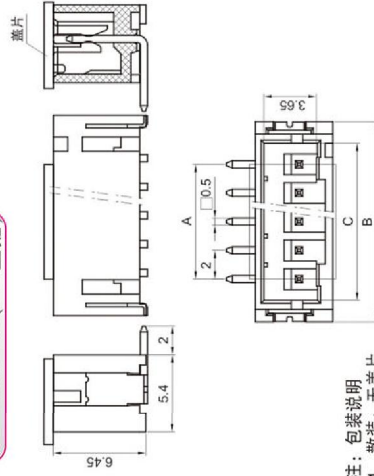


注: 包装说明
1、散架: 无盖片
2、管架: 无盖片
3、编带: 有盖片

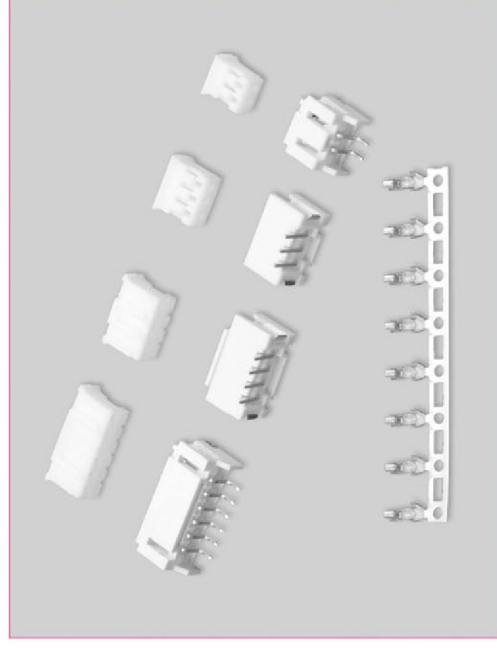

HX20007-AWB(PH)0808

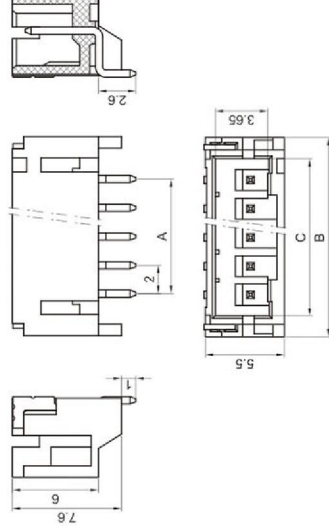

安装尺寸 MOUNTING MEASUREMENT

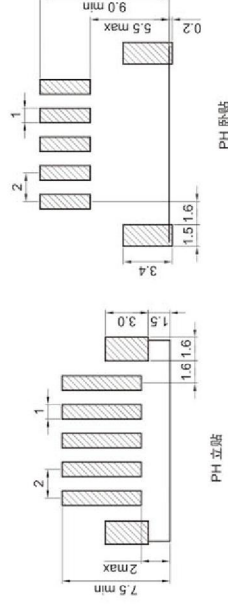

孔座 HOUSING (PH)

线数 Poles	型号 Type	尺寸Dimensions(mm)		
		A	B	C
2	HX20006-2Y	2.0	5.8	4.75
3	HX20006-3Y	4.0	7.8	6.75
4	HX20006-4Y	6.0	9.8	8.75
5	HX20006-5Y	8.0	11.8	10.75
6	HX20006-6Y	10.0	13.8	12.75
7	HX20006-7Y	12.0	15.8	14.75
8	HX20006-8Y	14.0	17.8	16.75
9	HX20006-9Y	16.0	19.8	18.75
10	HX20006-10Y	18.0	21.8	20.75
11	HX20006-11Y	20.0	23.8	22.75
12	HX20006-12Y	22.0	25.8	24.75
13	HX20006-13Y	24.0	27.8	26.75

针座 WAFER (PH)

线数 Poles	型号 Type	尺寸Dimensions(mm)			
		立贴 (180°)	卧贴 (90°)	C	
2	HX20007-2AB	HX20007-2AWB	2.0	8.0	5.0
3	HX20007-3AB	HX20007-3AWB	4.0	10.0	7.0
4	HX20007-4AB	HX20007-4AWB	6.0	12.0	9.0
5	HX20007-5AB	HX20007-5AWB	8.0	14.0	11.0
6	HX20007-6AB	HX20007-6AWB	10.0	16.0	13.0
7	HX20007-7AB	HX20007-7AWB	12.0	18.0	15.0
8	HX20007-8AB	HX20007-8AWB	14.0	20.0	17.0
9	HX20007-9AB	HX20007-9AWB	16.0	22.0	19.0
10	HX20007-10AB	HX20007-10AWB	18.0	24.0	21.0
11	HX20007-11AB	HX20007-11AWB	20.0	26.0	23.0
12	HX20007-12AB	HX20007-12AWB	22.0	28.0	25.0
13	HX20007-13AB	HX20007-13AWB	24.0	30.0	27.0