



环保物料

TEL: 0769-82001899



| Poles | DIM.A | DIM.B | DIM.C |
|-------|-------|-------|-------|
| 2P | 4.25 | 1.25 | 7.3 |
| 3P | 5.50 | 2.50 | 8.5 |
| 4P | 6.75 | 3.75 | 9.8 |
| 5P | 8.00 | 5.00 | 11.0 |
| 6P | 9.25 | 6.25 | 12.3 |
| 7P | 10.50 | 7.50 | 13.5 |
| 8P | 11.75 | 8.75 | 14.8 |
| 9P | 13.00 | 10.00 | 16.0 |
| 10P | 14.25 | 11.25 | 17.3 |
| 11P | 15.50 | 12.50 | 18.5 |
| 12P | 16.75 | 13.75 | 19.8 |
| 13P | 18.00 | 15.00 | 21.0 |
| 14P | 19.25 | 16.25 | 22.3 |
| 15P | 20.50 | 17.50 | 23.5 |
| 16P | 21.75 | 18.75 | 24.8 |
| 18P | 24.25 | 21.25 | 26.0 |
| 20P | 26.75 | 23.75 | 27.3 |

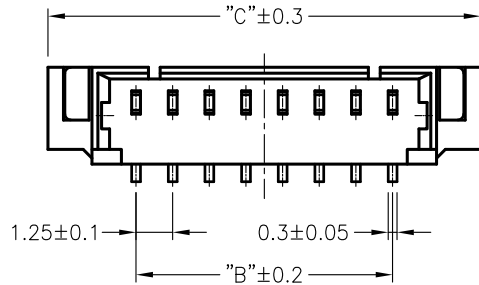



SPECIFICATIONS

- 1.Voltage rating: 125V AC, DC
- 2.Current rating: 1A, AC, DC
- 3.Withstanding Voltage: 500V AC/minute
- 4.Insulation resistance:100M min
- 5.Temperature range: -25 ° C-+85 ° C
- 6.Contact resistance: 20m max

WAFER
 Housing Material: PA9T UL 94V0
 Pin Material: Phosphor Bronze or Brass
 Contact Area Plating: Plated Tin or Plated Gold
 Mates with :P1250 series Housing
 Poles:02-20P
 Part No.: M1250VS-xx-9T-R

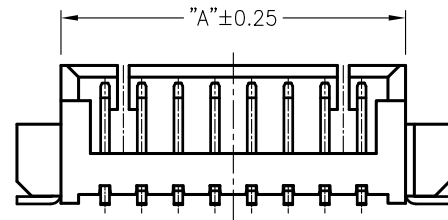

R=卷装 无=管装
 Pin位数

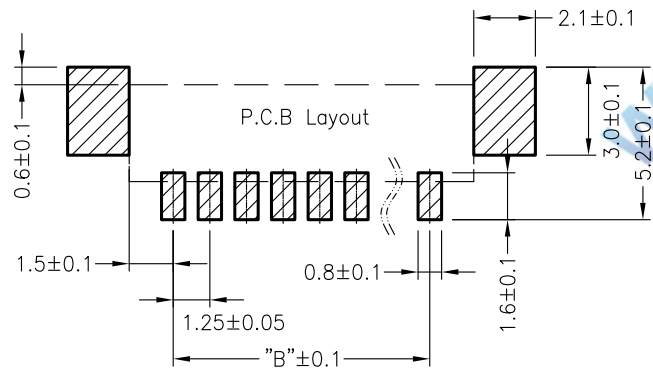

| | | | | TOLERANCE UNLESS OTHERWISE | | DRAWN | | CK tan | | XFCN兴飞连接器有限公司 | | SHEET | |
|----|-----|--------------|------|----------------------------|-------|-------|-------|-----------|--------------------------------------|-----------------|-------|----------|--|
| | | | | X. | ±0.30 | X° | ±5° | CHKD | CONNECTORS XFCN CONNECTORS CO., LTD. | | DATE | | |
| | | | | .X | ±0.20 | .X° | ±2° | APPD | PRODUCT NAME | | UNITS | | |
| | | | | .XX | ±0.08 | .XX° | ±1° | VIEW | 1.25mm Crimp Style Connectors | | SCALE | | |
| | | | | .XXX | ±0.03 | .XXX° | ±0.5° | PART. NO. | | M1250VS-xx-9T-R | | DWG. NO. | |
| AO | VER | MODIFICATION | DRAW | DATE | | | | | | | 1/1 | | |
| | | | | | | | | | | 2010. 4. 12 | | mm | |
| | | | | | | | | | | 1:1 | | 009 | |