

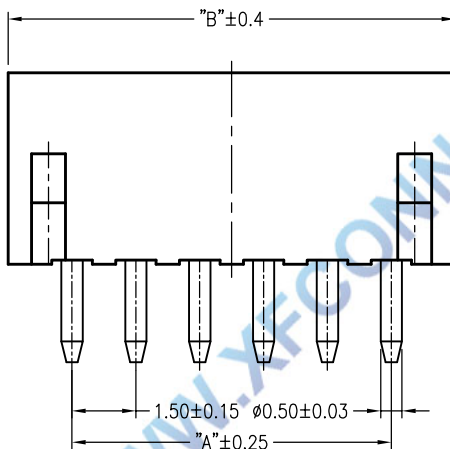
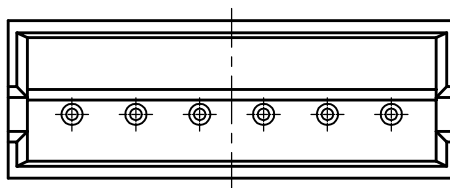


环保物料

TEL:0769-82001899

Poles	DIM.A	DIM.B
2	1.5	4.5
3	3.0	6.0
4	4.5	7.5
5	6.0	9.0
6	7.5	10.5
7	9.0	12.0
8	10.5	13.5
9	12.0	15.0
10	13.5	16.5
11	15.0	18.0
12	16.5	19.5
13	18.0	21.0
14	19.5	22.5
15	21.0	24.0
16	22.5	25.5

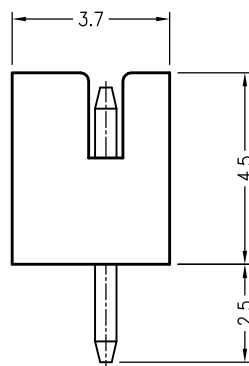

P.C.B LAYOUT

SPECIFICATIONS

- 1.Voltage rating: 100V AC, DC
- 2.Current rating: 1A, AC, DC
- 3.Withstanding Voltage: 500V AC/minute
- 4.Insulation resistance:500MΩ min
- 5.Temperature range: -25° C-+85° C
- 6.Contact resistance: 20mΩ max

WAFER

Housing Material: PA46 UL 94V0

Pin Material: Phosphor Bronze or Brass

Contact Area Plating: Plated Tin or Plated Gold

Mates with :P1510 series Housing

Poles:02-16P

PartNo.:M1510V-xx-46

Pin位数

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK	tan	XFCN兴飞连接器有限公司		SHEET	1/1
				X.	±0.30	X°	±5°		CONNECTORS XFCN CONNECTORS CO., LTD.		DATE	2010. 4. 12
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME		UNITS	mm
				.XX	±0.08	.XX°	±1°	VIEW	1.50mm Crimp Style Connectors		SCALE	1:1
				.XXX	±0.03	.XXX°	±0.5°		PART. NO.		DWG. NO.	009
A0	MODIFICATION		DRAW	DATE								