


No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
2	4.25	3.05	1.25
3	5.50	4.30	2.50
4	6.75	5.55	3.75
5	8.00	6.80	5.00
6	9.25	8.05	6.25
7	10.50	9.30	7.50
8	11.75	10.55	8.75
9	13.00	11.80	10.00
10	14.25	13.05	11.25
11	15.50	14.30	12.50
12	16.75	15.55	13.75
13	18.00	16.80	15.00
14	19.25	18.05	16.25
15	20.50	19.30	17.50
16	21.75	20.55	18.75

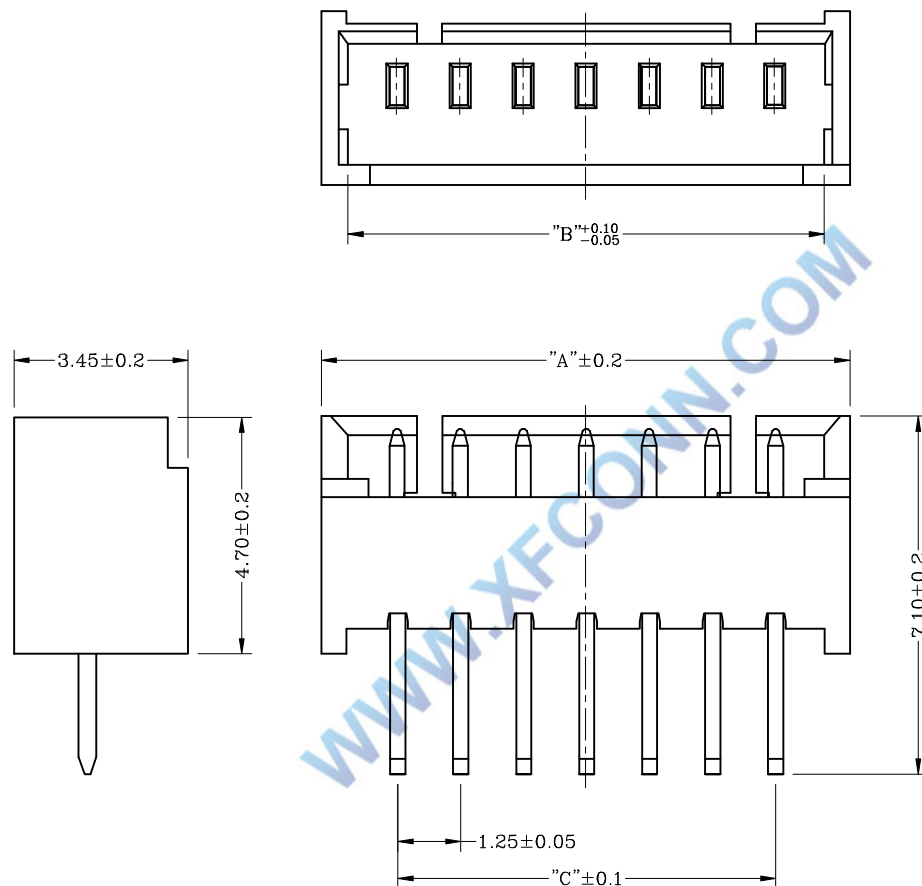

SPECIFICATIONS

- 1.Voltage rating: 125V AC, DC
- 2.Current rating: 1A, AC, DC
- 3.Withstanding Voltage: 500V AC/minute
- 4.Insulation resistance:100M min
- 5.Temperature range: -25 ° C-+85 ° C
- 6.Contact resistance: 20m max

WAFER

Housing Material: Nylon66 UL 94V0

Pin Material: Phosphor Bronze or Brass


Contact Area Plating: Plated Tin or Plated Gold

Mates with :P1250 series Housing

Poles:02-16P

Part No.: M1250V-xx-46

Pin位数

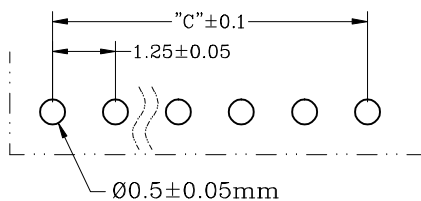

P. C. B LAYOUT

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1	
				X.	± 0.30	X°	$\pm 5^\circ$			CHKD	DATE	2010. 4. 12
				.X	± 0.20	.X°	$\pm 2^\circ$	APPD	PRODUCT NAME	1.25mm Crimp Style Connectors	UNITS	mm
				.XX	± 0.08	.XX°	$\pm 1^\circ$	VIEW	PART. NO.	M1250V-xx-46	SCALE	1:1
				.XXX	± 0.03	.XXX°	$\pm 0.5^\circ$				DWG NO.	009
AO	MODIFICATION		DRAW	DATE								