
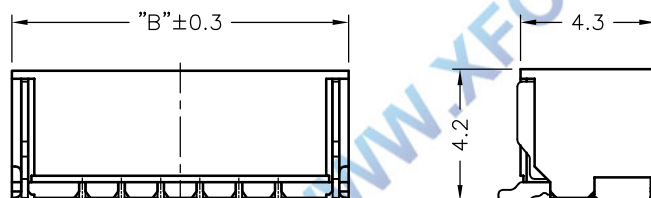


环保物料

TEL:0769-82001899

Poles	DIM.A	DIM.B
2P	1.25	5.75
3P	2.50	7.00
4P	3.75	8.25
5P	5.00	9.50
6P	6.25	10.75
7P	7.50	12.00
8P	8.75	13.25
9P	10.00	14.50
10P	11.25	15.75
11P	12.50	17.00
12P	13.75	18.25
13P	15.00	19.50
14P	16.25	20.75
15P	17.50	22.00

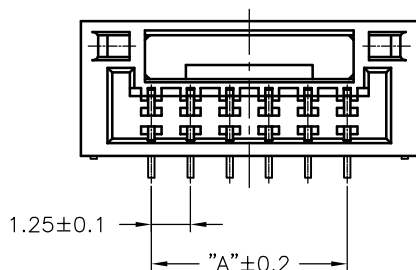


SPECIFICATIONS

- 1.Voltage rating: 50V AC, DC
 - 2.Current rating: 1A, AC, DC
 - 3.Withstanding Voltage: 500V AC/minute
 - 4.Insulation resistance:100M min
 - 5.Temperature range: -25 ° C-+85 ° C
 - 6.Contact resistance: 30m max
- WAFER

Housing Material: PA9T UL 94V0
 Pin Material: Phosphor Bronze or Brass
 Contact Area Plating: Plated Tin or Plated Gold
 Mates with :P1257 series Housing
 Poles:02-15P

Part No.: M1257VS-xx-9T-R

R=卷装 无=管装
 Pin位数

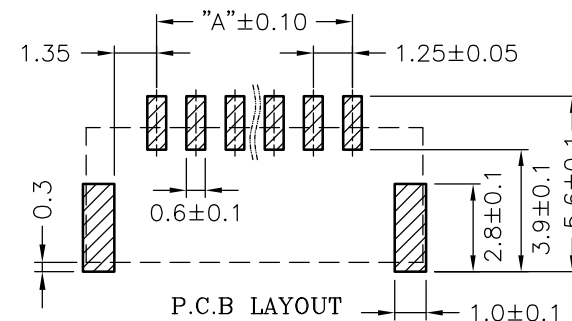

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	1.25mm Crimp Style Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	M1257VS-xx-9T-R	
				.XXX	±0.03	.XXX°	±0.5°		UNITS	mm	
AO	MODIFICATION			DRAW	DATE			SCALE	1:1		
VER								DWG NO.	009		