
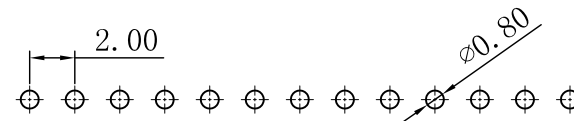
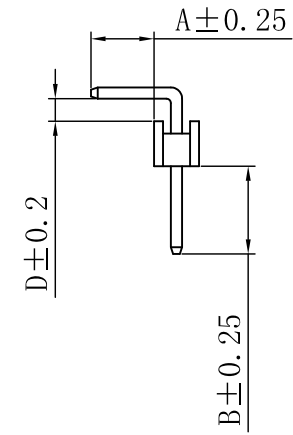
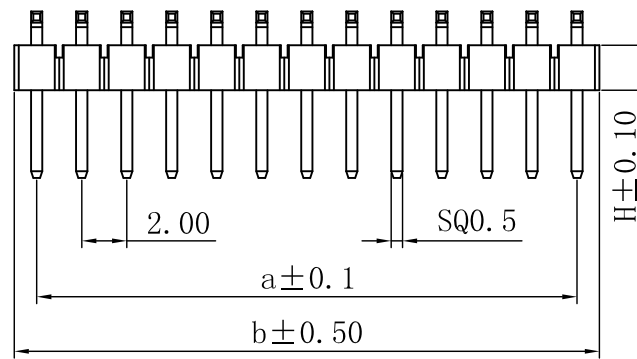
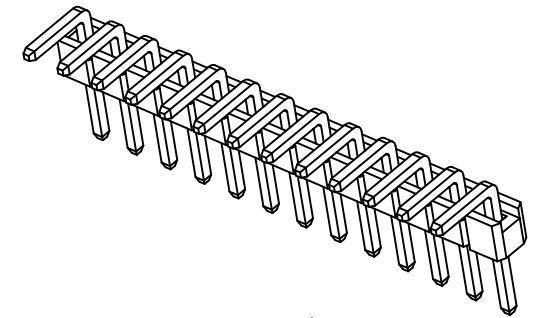


环保物料

TEL:0769-82001899

$a=2.0 \times (\text{No. of pins per row}-1)$   
 $b=2.0 \times (\text{No. of pins per row})-0.30$

NOTES:  
 Voltage Rating:250V AC/DC  
 Current Rating:1.5A AC/DC  
 Dielectric Withstand Voltage:500V AC/minute  
 Contact Voltage:20M Max.  
 Insulation Voltage:1000M Min  
 Operation temperature:-40 °C to +105 °C  
 Insulator Material:Polyester.UL94V-0  
 Contact Material:Brass  
 Contact Plating:AuorSn Plated on Nickel Overall

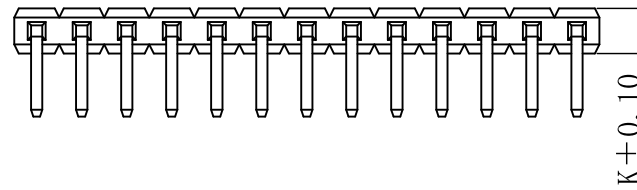

PCB Layout

	2.0	2.0	1.0	2.8	3.9
n	H	K	D	A	B

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	2.00mm Pin Header Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	PZ200R-11-XX-XXB20XX	
				.XXX	±0.03	.XXX°	±0.5°			DWG NO.	009
A0	MODIFICATION		DRAW	DATE							