
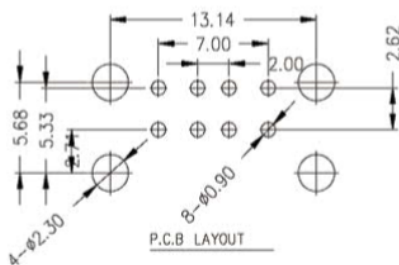
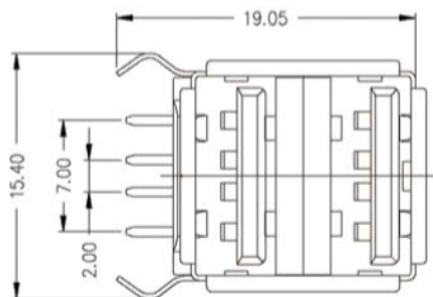
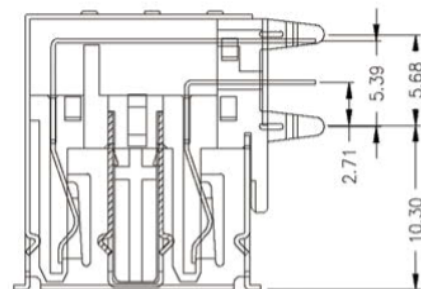
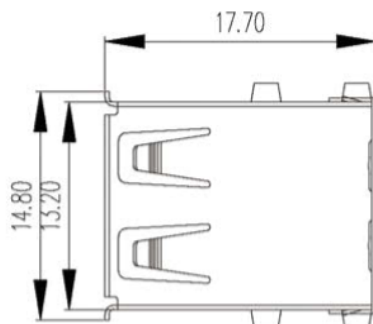


REV.	DESCRIPTION	DATE
A	RELEASE	2013.8.15

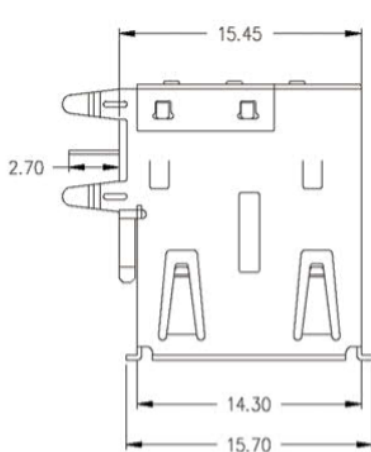

特性 Specifications:

电气 Electrical:
接触电阻 Contact Resistance:
 30 milliohms MAX

绝缘电压 Dielectric Withstanding Voltage:
 500 V AC AT Sea Level

绝缘电阻 Insulation Resistance:
 1000 MEGA ohms MIN

材料 Material:

1. 塑料: PBT UL 94V-0 黑色
2. 端子: Contact Copper Alloy C2680H
3. 壳体/外壳: Shell Copper Alloy

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating (1U) Area
Tin On Solder Tails
接触点镀金 1U*, 焊脚镀
2. 壳体/外壳: Shell
Nickel plating 镀镍

UNLESS TOLERANCE		DRAW BY	深圳市金航标电子有限公司	
GENERAL	ANGLE	DESIGN BY	WWW.BDS666.COM	
X ± 0.38	X' ± 3.0'	CHECK BY	0755-83044319	
.X ± 0.30	.X' ± 2.0'	APPROVE BY	KH-2AF90DIP-1715	
.XX ± 0.25	.XX' ± 1.0'	SCALE	SHEET	UNIT
.XXX ± 0.10	.XXX' ± 0.5'	1: 1	1/1	MM
		ITEM: USB 双层A母座有后盖有边有脚		
		DRW NO:	1120-204019	REV: A0