
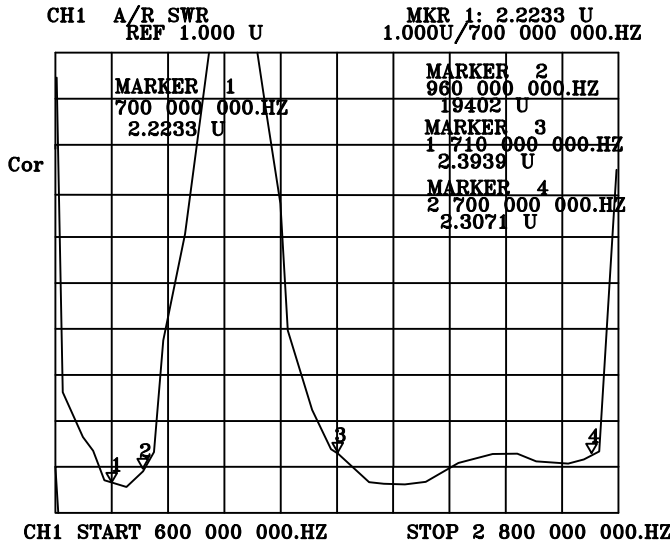


标注前有"*"重点检验尺寸

图面产品均符合ROHS标准

型号: KH-FPC4G-1.13IPEX-100

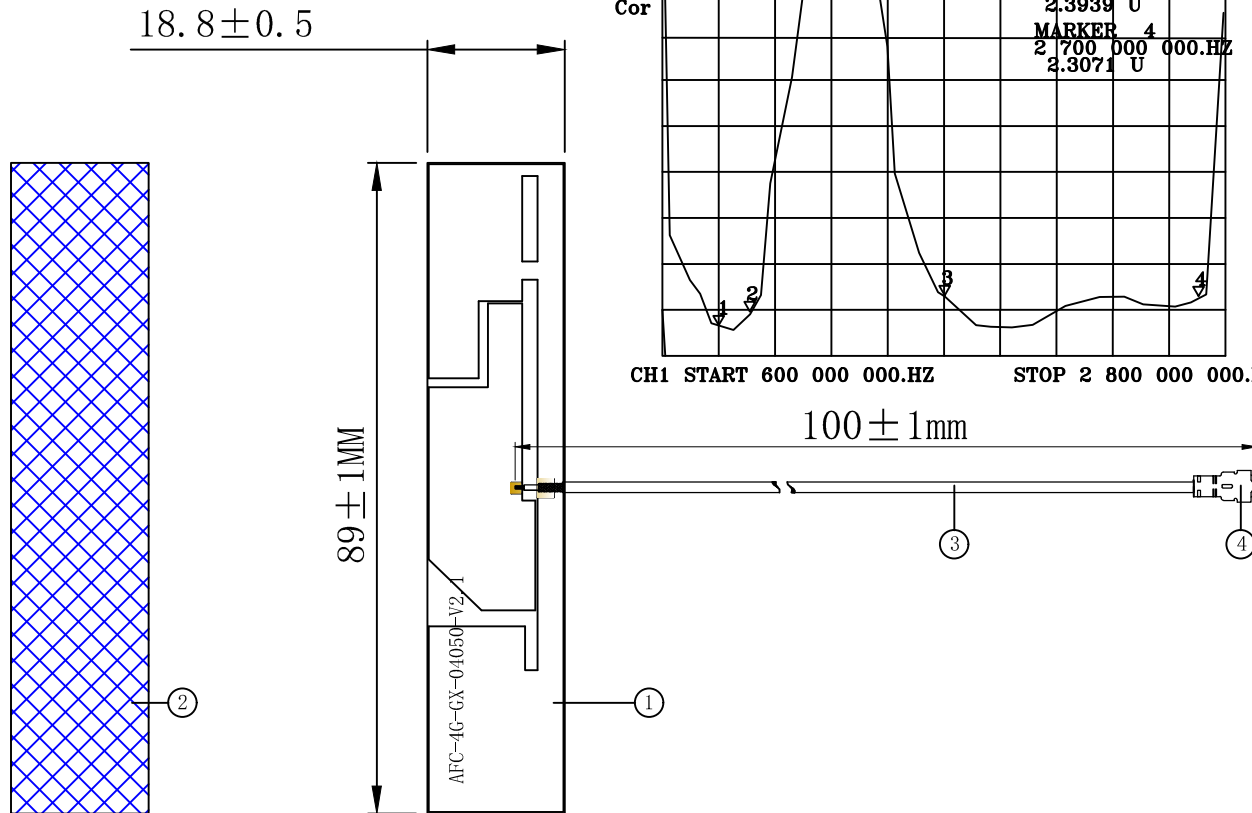


| Performance parameters | |
|------------------------|-------------------------|
| Product name | 内置FPC 4G天线 |
| Model Type | KH-FPC4G-1.13IPEX-100 |
| Frequency Range | 700-960/1710-2700MHZ |
| Band Width | 260/990 |
| Vswr | ≤2.5 |
| Gain | 2.5DBi |
| Impedance | 50 OHM |
| Polarization | Horizontal polarization |
| Radiation | OMNIDIRECTIONAL |
| Max power | 10 W |
| CABLE | RF-1.13-L=100MM |
| Connector | IPEX |
| Dimensions | 89 mm *18.8mm |
| Temperature | -35 °-- 75° |
| Lighting protection | DC grounding |

部件材质工艺说明:

| 序号 | 物料名称 | 产品描述 | 数量 |
|----|---------------------|-----------------------------------|----|
| ① | Antenna element | PI BLACK | 1 |
| ② | Installation method | 3M 300LSE | 1 |
| ③ | CABLE | RFφ1.13 COAXIAL CABLE 50ohm BLACK | 1 |
| ④ | CONNECTOR | IPEX | 1 |

深圳市金航标电子有限公司

技术详询



| | | | | | | | | | |
|----|---------|-------|------|----|-----|----|-----------------------|-----|---|
| 公差 | .x | ±0.30 | 变更记录 | 日期 | 变更者 | 料号 | KH-4G-GX | 编码 | |
| | x.x | ±0.20 | | | | 品名 | 内置FPC 4G天线 | | |
| 图法 | x.xx | ±0.10 | 比例 | 纸张 | A4 | 型号 | KH-FPC4G-1.13IPEX-100 | | |
| | ANGULAR | @5~ | | | | 单位 | MM | 版本 | A |
| | | | | | | 审核 | 页码 | 1/1 | |