
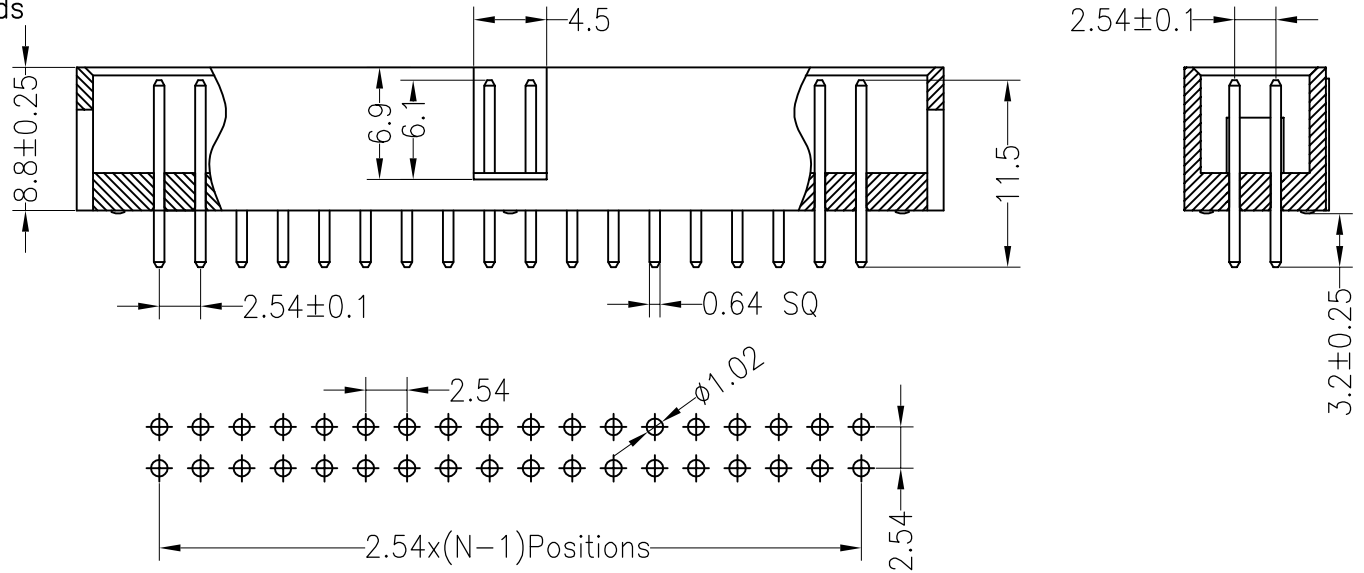


RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT 灰色
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

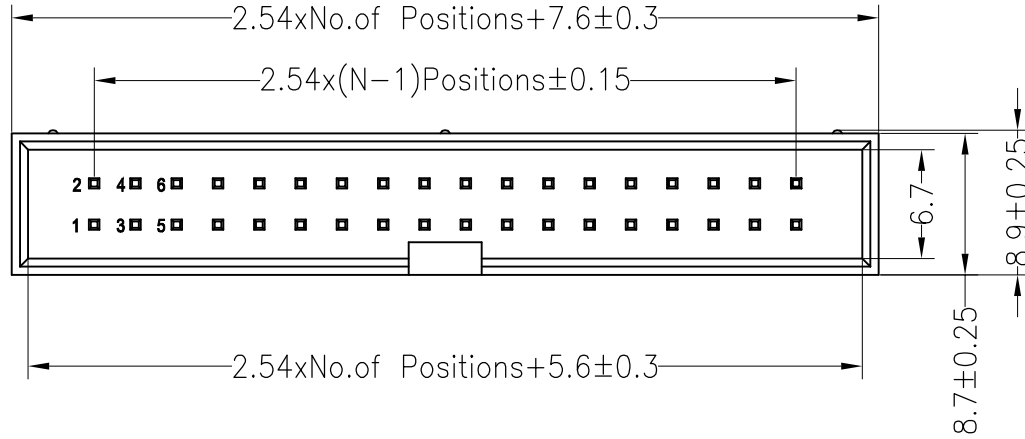

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

深圳市连盛精密连接器有限公司

PART NO.

BH-00033

TITLE:

2.54BOX 26P H=8.8 DIP PC3.2
 L=11.5 PBT

OPERATION

X.X

± 0.30

X.XX

± 0.20

X.XXX

± 0.10

Angle

$\pm 3'$

DIM

TOL

DRAW

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

ϕ

A0

2012.03.28

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9