RoHS

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

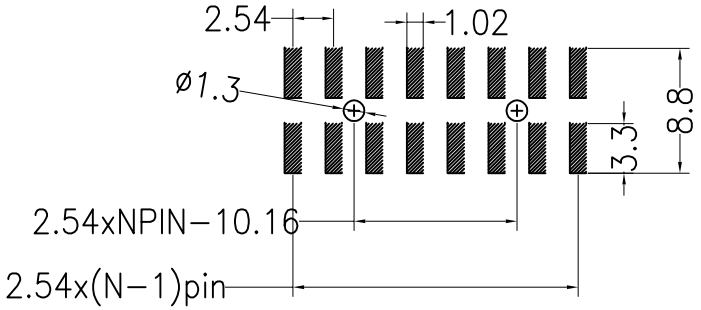

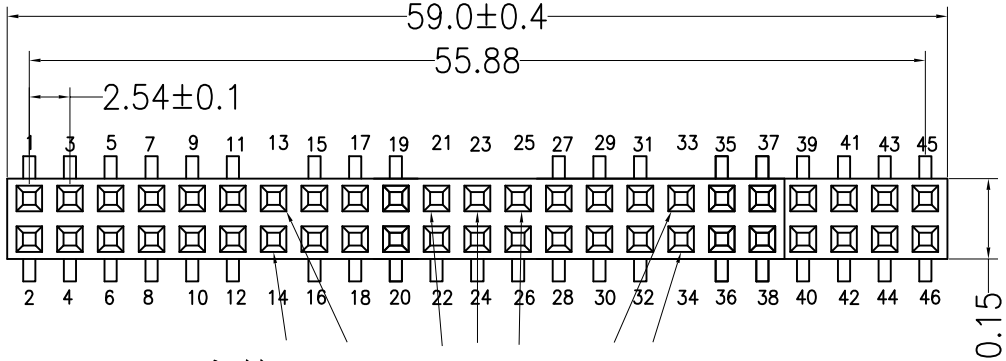

空第13,14，21，23，25，33，34P

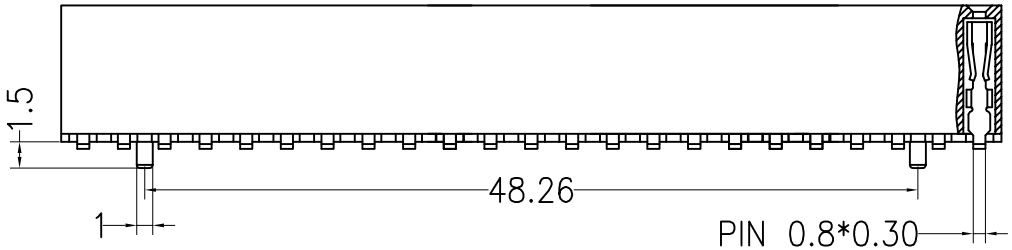



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司	
X.X	±0.30				UNIT	mm		
X.XX	±0.20	CHECK			SIZE	A4	PART NO.	FH-00215
X.XXX	±0.10				SHEET	1/1		
Angle	±3°	APPROVE			PROJ.		TITLE:	2.54FH H8.5mm 2x23pin SMT O Type 空13,14, 21, 23, 25, 33, 34P
DIM	TOL							