





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

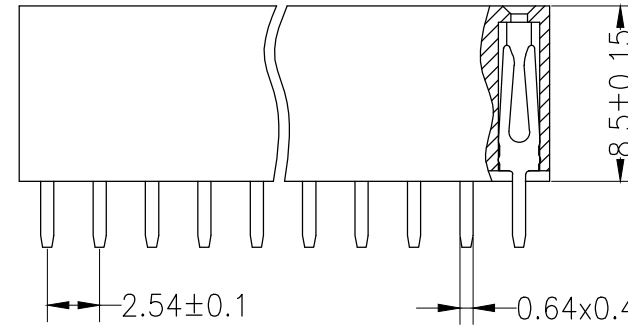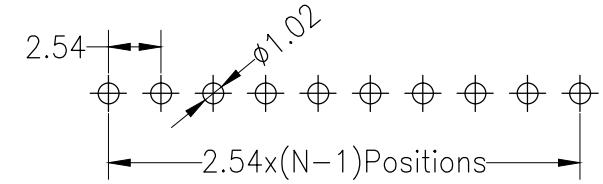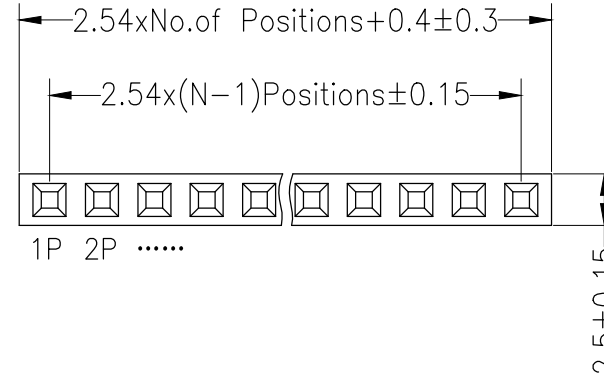

				OPERATION		DRAW	SCALE	FIT	深圳市连盛精密连接器有限公司 PART NO. FH-00216 TITLE: 2.54FH H8.5mm 1x9pin 180° W2.5mm	
				X.X	±0.30		UNIT	mm		
				X.XX	±0.20	SIZE	A4			
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10	CHECK	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	±3°	APPROVE	PROJ.		
					DIM	TOL				