RoHS

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

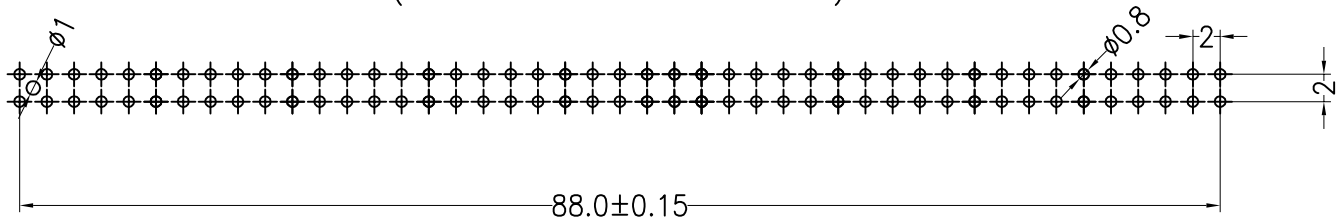

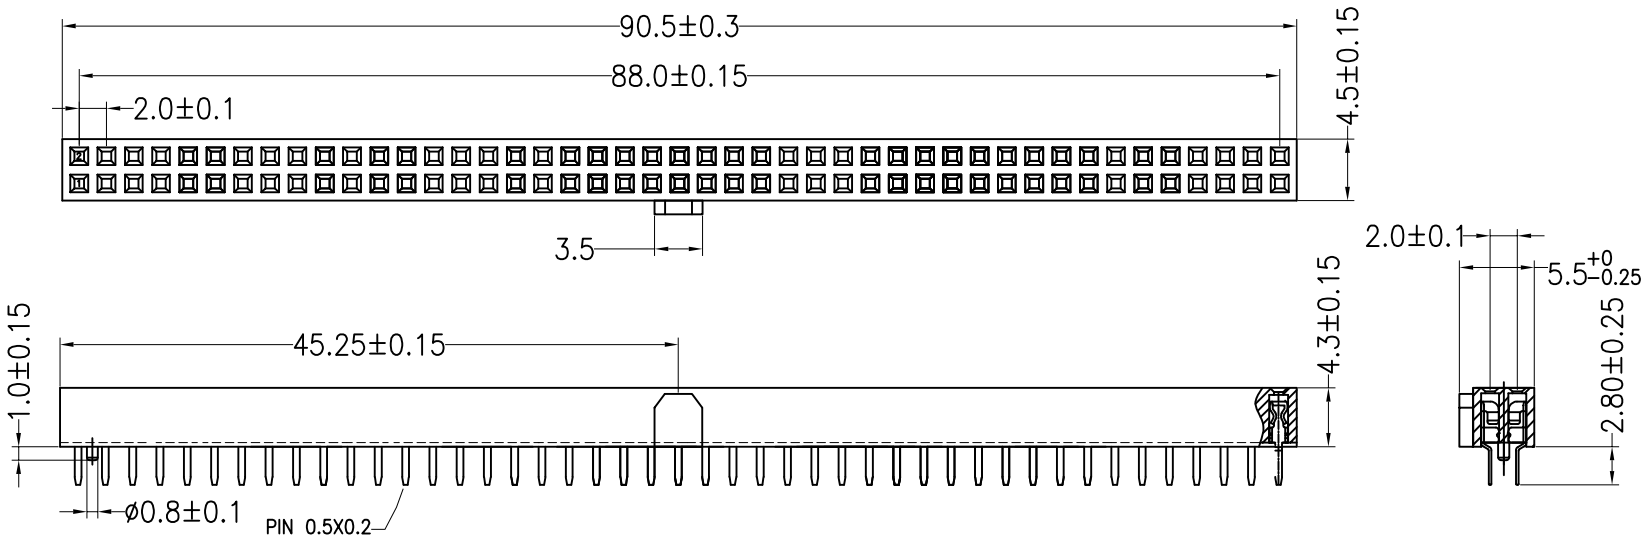

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.07.23	NEW DRAWING	

OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司	
X.X	±0.30				UNIT	mm		
X.XX	±0.20	CHECK			SIZE	A4	PART NO.	FH−00512
X.XXX	±0.10				SHEET	1/1		
Angle	±3°	APPROVE			PROJ.		TITLE:	2.0FH H=4.3 W=4.5 2*45P DIP PC2.8 O型 AU1U 青铜 PA6T 带凸(凸高1.0mm) 带单边柱 Φ0.8 H1.0
DIM	TOL							