





RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

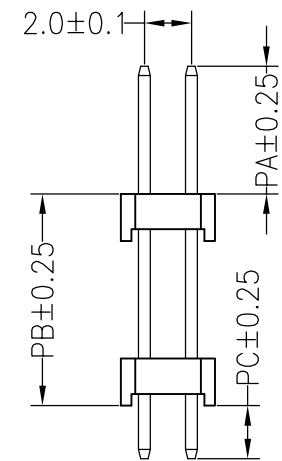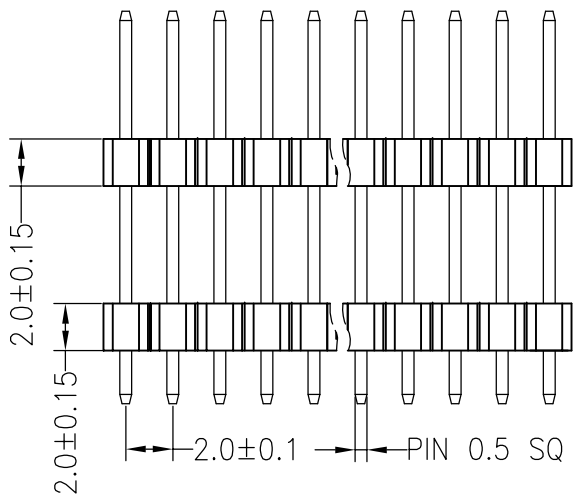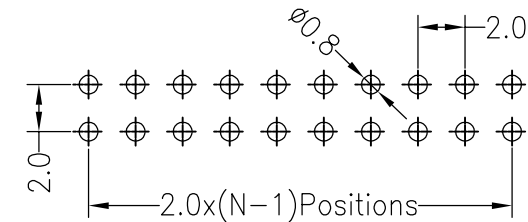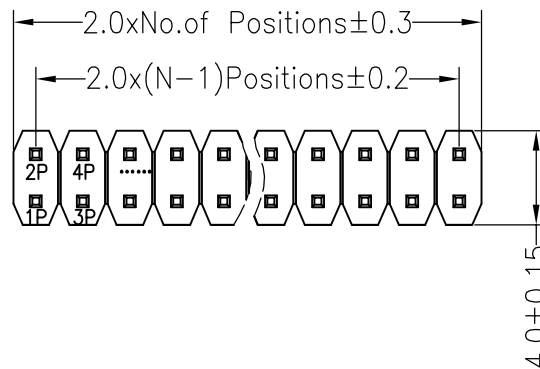

Dimension antitheses list				
ITEM	PC	PB	PA	L
Alternate	2.50	7.00	5.00	14.50
Alternate				

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司 PART NO. PH-00144 TITLE: 2.0PH 2x10pin 2*H2.0mm 180°		
				X.X	±0.30			UNIT	mm					
				X.XX	±0.20	CHECK		SIZE	A4					
A0				2012.04.11	NEW DRAWING			SHEET	1/1					
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE		PROJ.						
1	2	3	4	5	6	7	8	9						