


RoHS




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au(0.8u") Over Ni(30~50u")
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

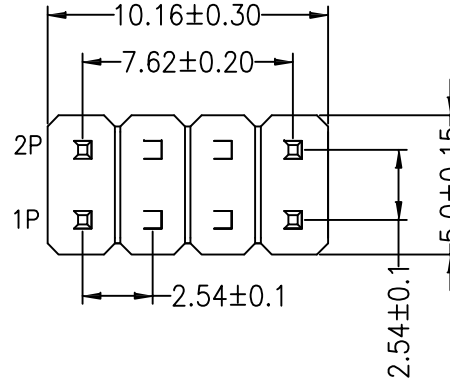

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

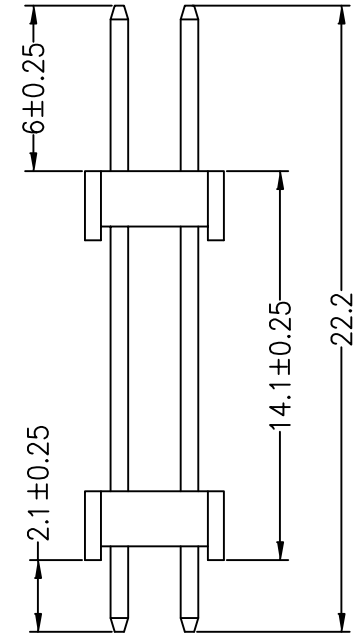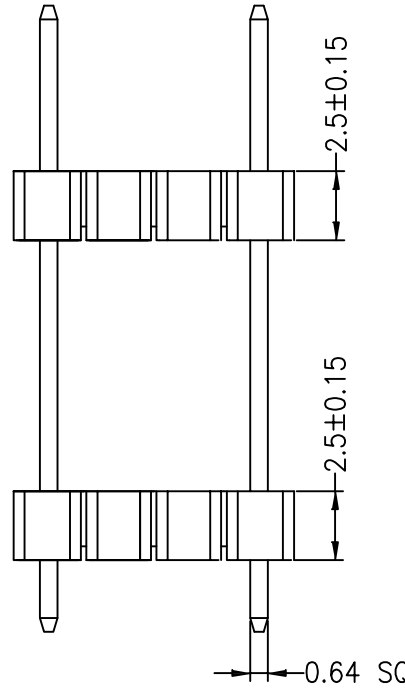

Ordering Information

1225 22 04 C N XX S 222 X 01

- Insulator Material Option
 - A=BK-PBT
 - B=BK-PA66
 - C=BK-PA6T
 - D=BK-PA46
 - F=BK-LCP
- Contact Plating
 - G0:Gold Flash
 - G2:5U" Gold
 - G3:10U" Gold
 - G4:15U" Gold
 - G5:30U" Gold
 - S0:Gold Flash/Tin
 - SN:Tin
- Pin Length
 - 222=22.2mm
- Packing
 - 0=PE Bag
 - A=Tray
 - T=Tube

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司	
				X.X	±0.30			UNIT	mm				
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		PH-00274	
A0	2015.03.10	NEW DRAWING		X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:		2.54x2.5PH 2x4P 双壁 180° 第3,4,5,6P为空 Pin,L=22.2MM	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			PROJ.				