RoHS

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au1U Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: LCP
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

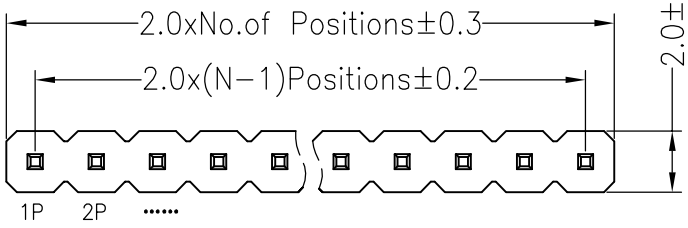

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

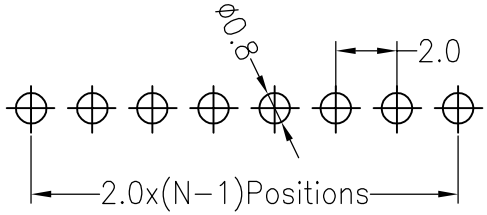

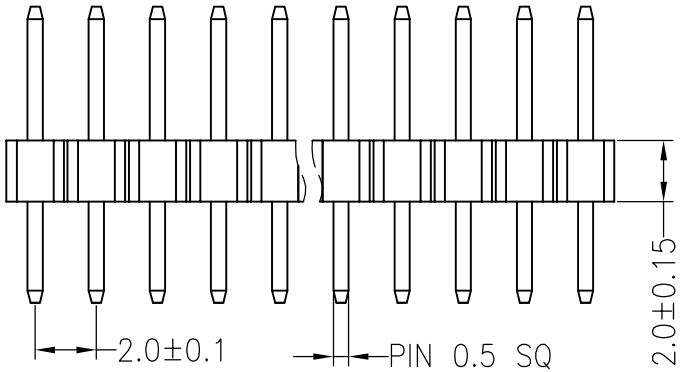

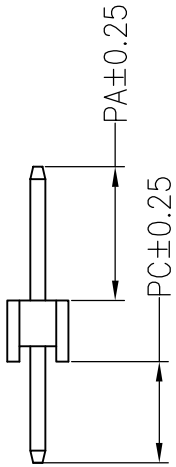

Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.80	3.90	8.70
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.11	NEW DRAWING	

OPERATION					
DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司
X.X	±0.30		UNIT	mm	
CHECK			SIZE	A4	PART NO. PH-00352
X.XX	±0.20		SHEET	1/1	
X.XXX	±0.10				TITLE: 2.0PH 1x6pin H2.0mm DIP PA3.9 PC2.8
Angle	±3°				
APPROVE					
DIM	TOL		PROJ.		