





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

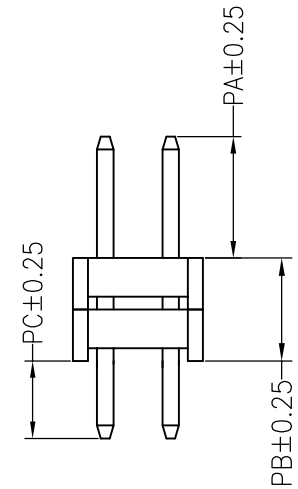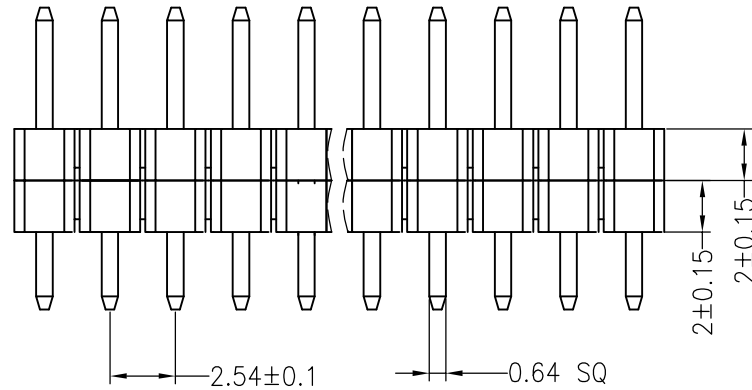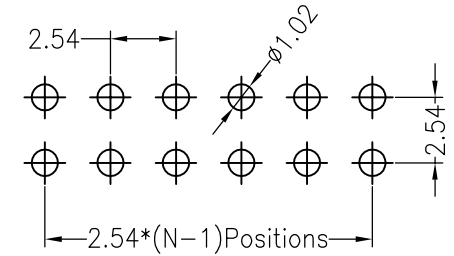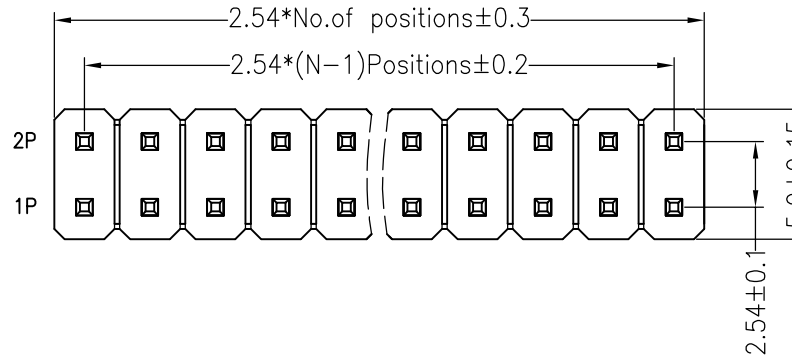

Dimension antitheses list				
ITEM	PC	PA	PB	L
Alternate	3.00	3.00	4.00	10.00

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司 PART NO. PH-00474 TITLE: 2.54PH 2H=2X2.0 2X7P PA=PC=3.0	
				X.X	±0.30			UNIT	mm				
				X.XX	±0.20	CHECK		SIZE	A4				
A0				2012.03.28	NEW DRAWING			SHEET	1/1				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3'	APPROVE		PROJ.	◆				
				DIM	TOL								
1	2	3	4	5	6	7	8	9					