





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

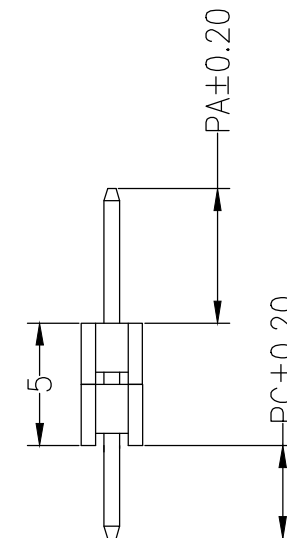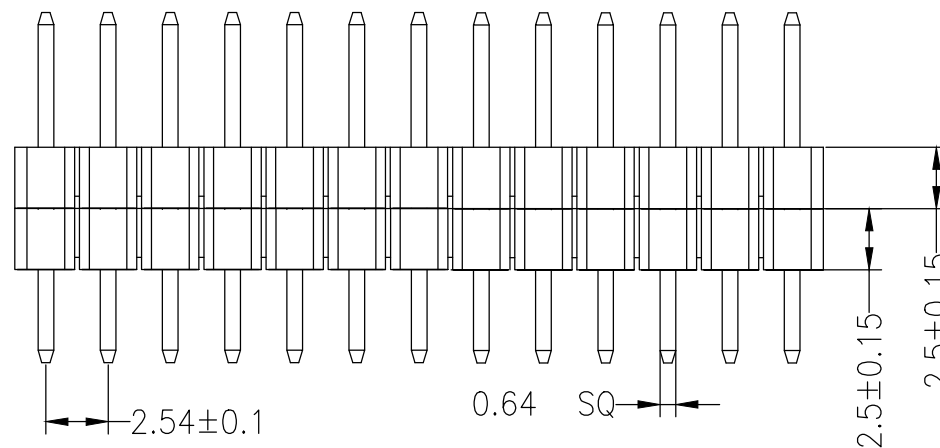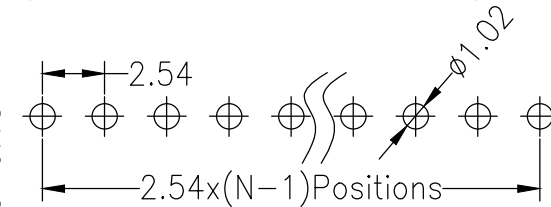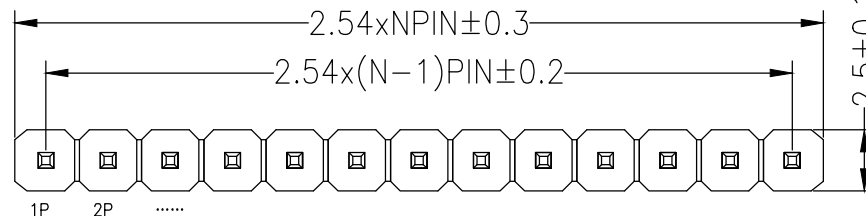

Dimension antitheses list				
ITEM	PC	PA	L	TYPE
Alternate	3.00	3.60	11.60	

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PART NO.		TITLE:	
A0	2014.04.16	NEW DRAWING			X.X	±0.30	DRAW	LU	14.04.16	UNIT	mm	PH-01303	
					X.XX	±0.20	CHECK			SIZE	A4	2.54PH 2H=2X2.5 1X8P 180°	
					X.XXX	±0.10				SHEET	1/1		
					Angle	±3°	APPROVE			PROJ.			

深圳市连盛精密连接器有限公司

PART NO. PH-01303
 TITLE: 2.54PH 2H=2X2.5 1X8P 180°