





RoHS

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40° c to +105° c

Contact Material: Brass
 Contact Plating: 锌合金镀锡 Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180° C for 30-60 seconds
 (200° C for 10 seconds)

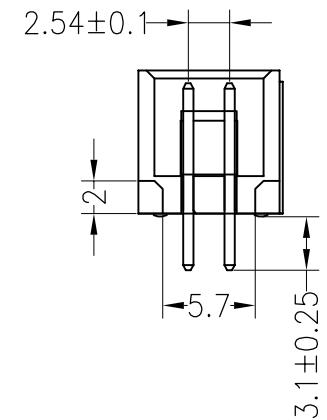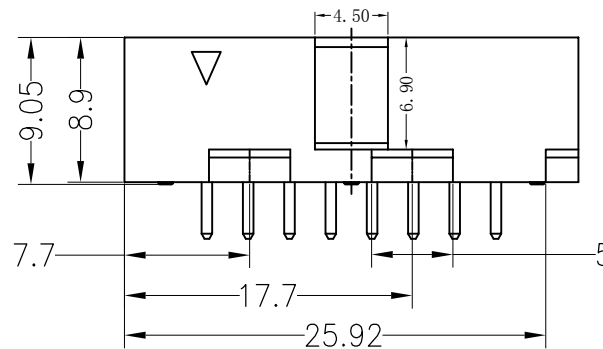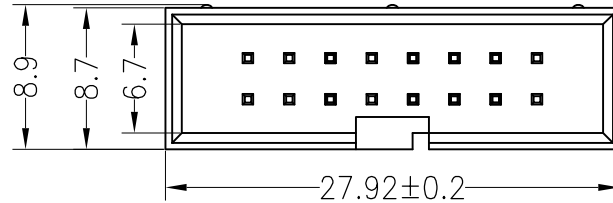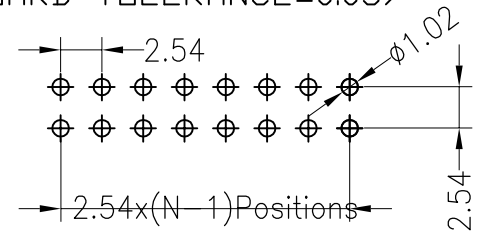

				OPERATION		SCALE		FIT		深圳市连盛精密连接器有限公司	
				DRAW		UNIT		mm			
				CHECK		SIZE		A4		PART NO.	
A0				2012.03.28		NEW DRAWING				BH-00161	
REV				DATE		MODIFICATION		CHANGE		TITLE:	
1				2		3		4		5	
DESCRIPTION				3		4		5		9	

深圳市连盛精密连接器有限公司

PART NO. BH-00161

TITLE: 2.54Box 16P H8.8mm 180度 无磁锌合金镀锡