
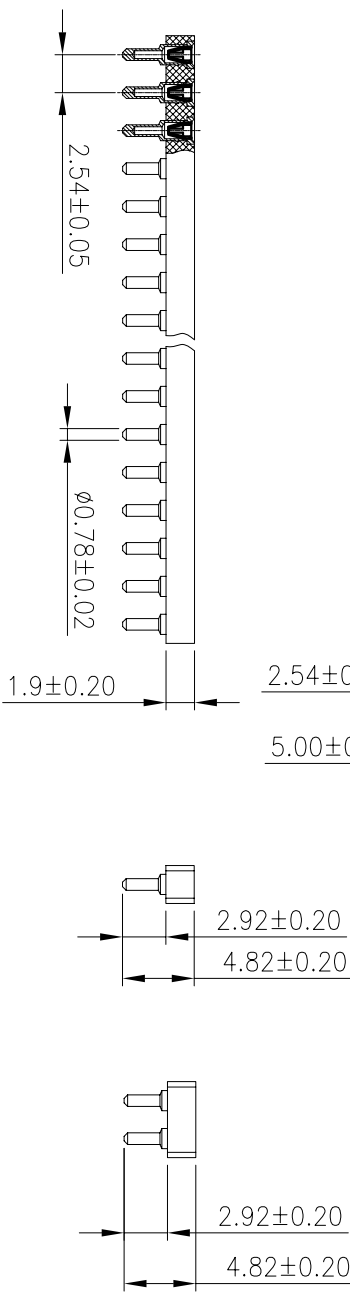
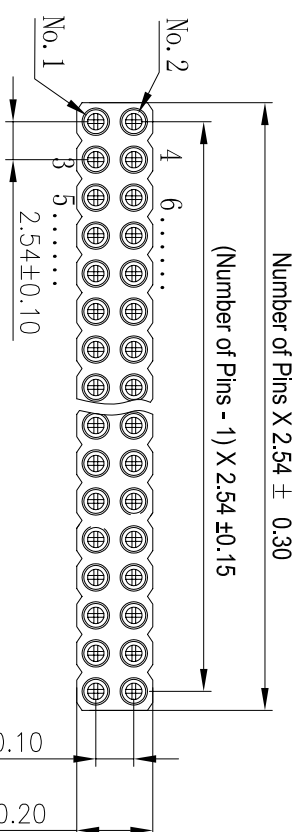


**Technical Specs:**

**Insulator:** Black glass filled polyester PPS-GF30-FR  
**Flammability:** UL 94V-0  
**Sleeve:** Brass  
**Contact clip(4/6 finger):** Beryllium copper(C17200)  
**Accepted pin:** Ø0.38 to 0.56mm  
**Forces:** (polished steel gauge Ø0.43mm)  
 --Insertion 2 N typ  
 --Withdrawal 1 N typ  
**Mechanical life:** min500 cycles  
**Rated current:** 3A  
**Contact resistance:** max 10mΩ  
**Dielectric resistance:** Min 1000MΩ  
**Operating temperature:** -40°C to +105°C  
**Soldering temperature:** 260°C, 10s max

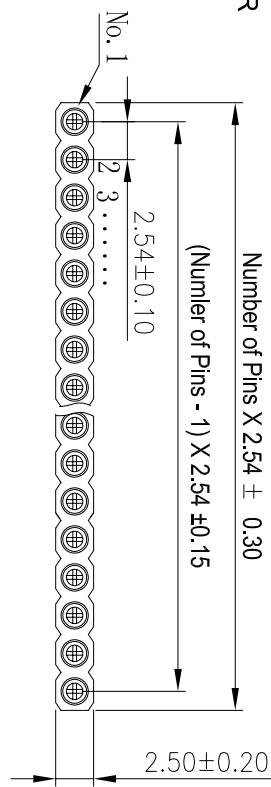

**深圳市连盛精密连接器有限公司**

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X		$\pm 0.30$		UNIT		mm			
X.XX		$\pm 0.20$		CHECK		SIZE		FH-00305	
X.XXX		$\pm 0.10$		APPROVE		SHEET			
Angle		$\pm 3^\circ$		PROJ.		1/1		TITLE: 2.54X1.9圆孔排母 1x2p	
DIM		TOL		CHANGE		DIM			
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DATE	
1		2		3		4		5	
A0		2012.08.08		NEW DRAWING		NEW DRAWING		2012.08.08	