
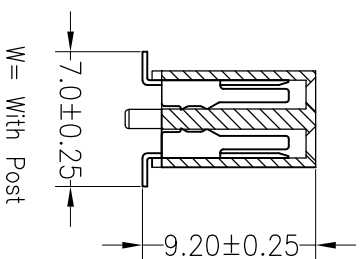
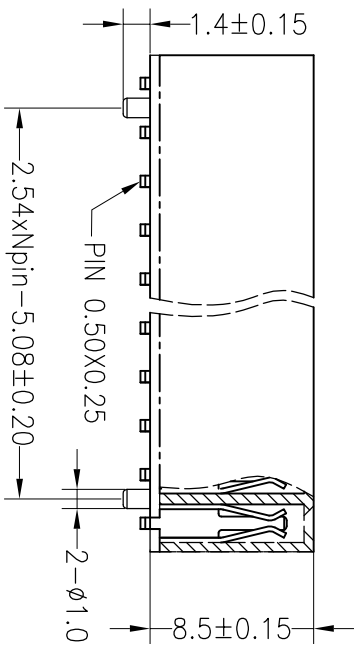
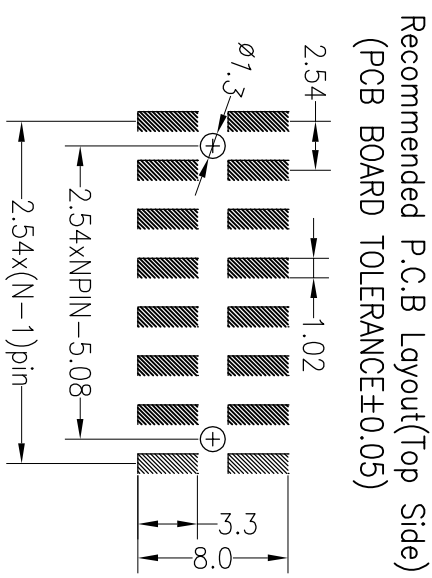


# RoHS

## SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

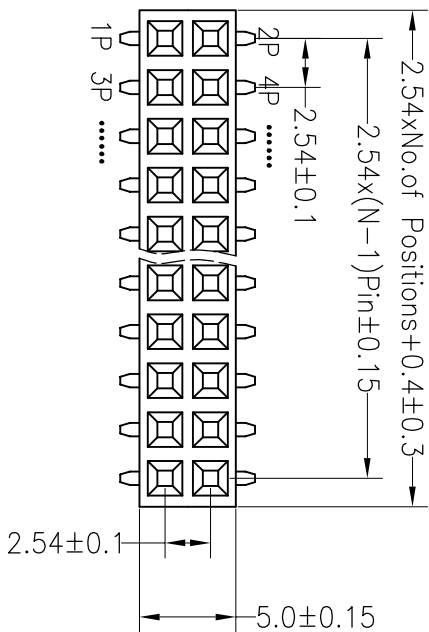

W = With Post

深圳市连盛精密连接器有限公司

PART NO. FH-00357

TITLE: 2.54FH H8.5mm 2x17pin SMT U-A型

| OPERATION |       | DRAW    |  | SCALE |     | FIT |  |
|-----------|-------|---------|--|-------|-----|-----|--|
| X.X       | ±0.30 |         |  | UNIT  | mm  |     |  |
| X.XX      | ±0.20 | CHECK   |  | SIZE  | A4  |     |  |
| X.XXX     | ±0.10 |         |  | SHEET | 1/1 |     |  |
| Angle     | ±3°   | APPROVE |  | PROJ. |     |     |  |
| DIM       | TOL   |         |  |       |     |     |  |

| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE |
|-----|------------|--------------------------|--------|
| A0  | 2012.03.28 | NEW DRAWING              |        |
| 1   |            |                          |        |