





RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

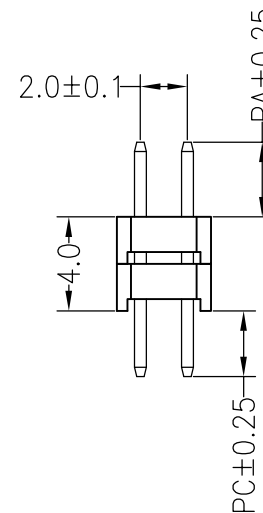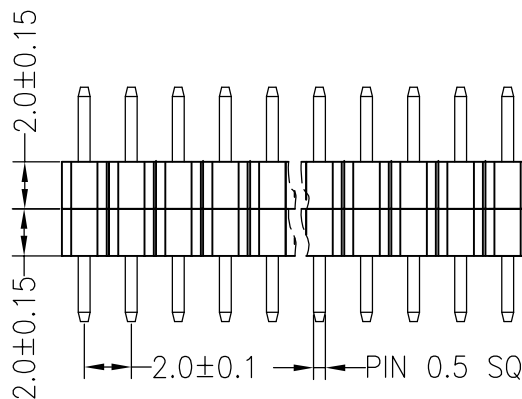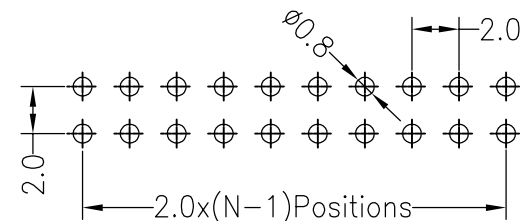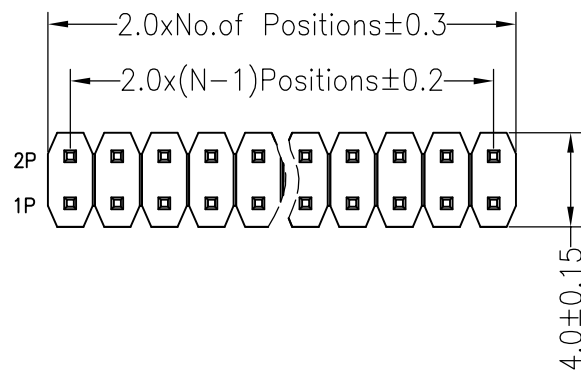

Dimension antitheses list			
ITEM	PC	PA	L
Alternate	2.35	2.35	8.70

深圳市连盛精密连接器有限公司

				OPERATION		DRAW		SCALE		FIT		PART NO.		TITLE:	
				X.X	±0.30			UNIT	mm						
				X.XX	±0.20	CHECK		SIZE	A4						
				X.XXX	±0.10			SHEET	1/1						
				Angle	±3'	APPROVE		PROJ.	☛						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL										
A0	2012.04.11	NEW DRAWING											PH-00261	2.0PH 2x3pin 2H=2X2.0mm PA=PC=2.35 L=8.7	