





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

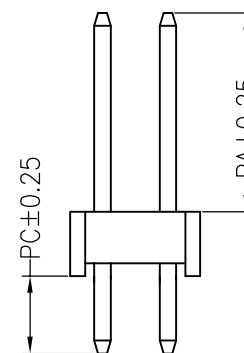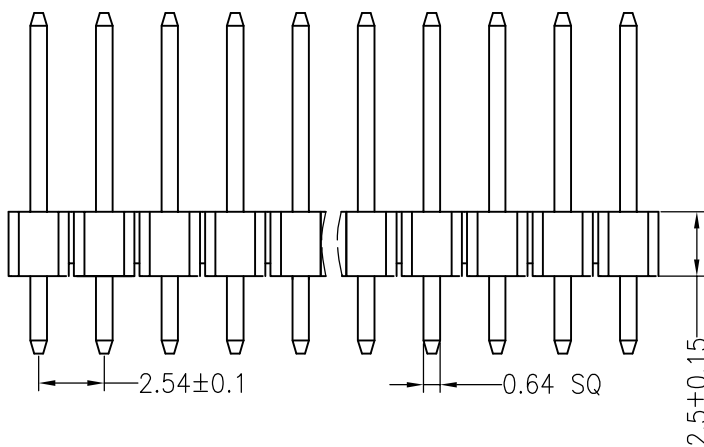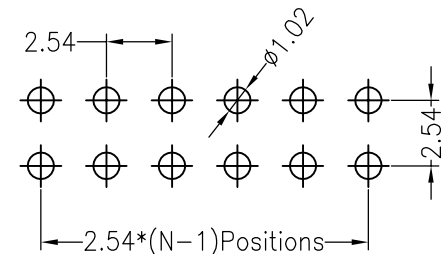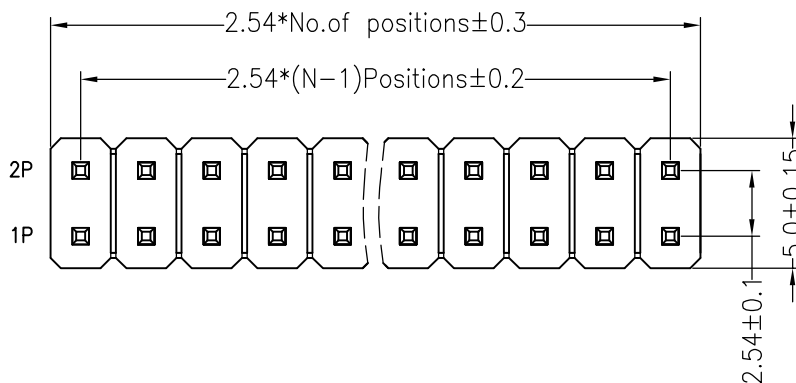

Dimension antitheses list			
ITEM	PA	PC	L
Standard	7.00	3.00	12.50
Alternate			

深圳市连盛精密连接器有限公司

				OPERATION		DRAW	SCALE	FIT	深圳市连盛精密连接器有限公司	
				X.X	±0.30					
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	PH-00602
A0	2012.03.28	NEW DRAWING		X.XXX	±0.10	APPROVE	SHEET	1/1	TITLE:	2.54PH H2.5mm 2x20P 180°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3'		DIM	TOL	PROJ.	☐