

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C



Contact Material:Brass

Contact Plating:Au Over Ni



Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

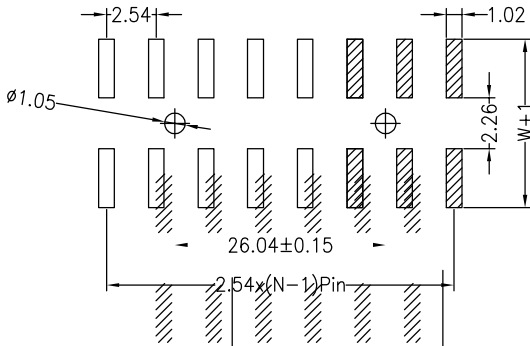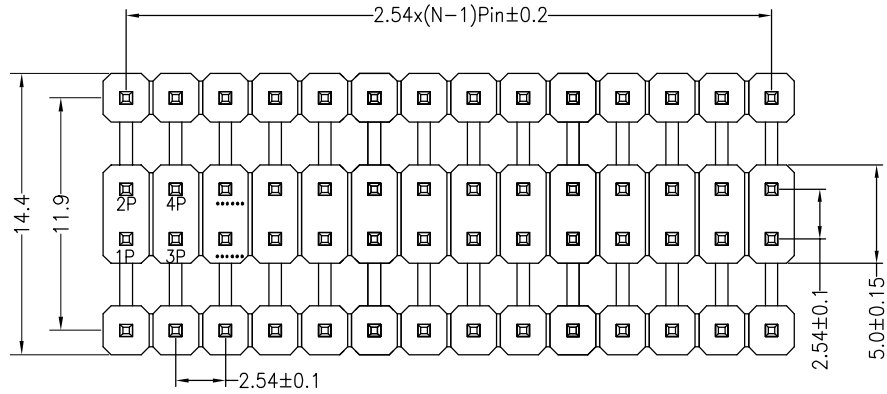

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

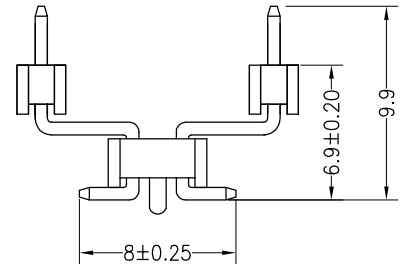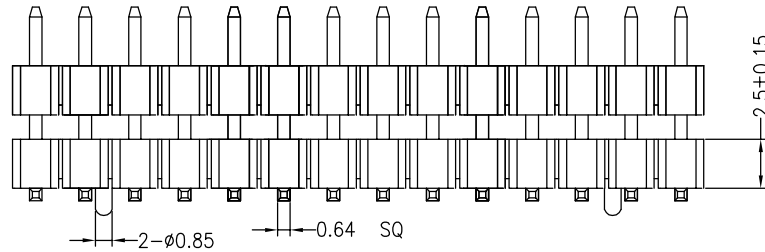

				OPERATION		DRAW	SCALE	FIT	深圳市连盛精密连接器有限公司 PART NO. PH-00606 TITLE: 2.54PH 2x14pin H2.5mm SMT	
				X.X	±0.30		UNIT	mm		
				X.XX	±0.20	SIZE	A4			
				X.XXX	±0.10	SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE	PROJ.			
1	2012.04.11	NEW DRAWING		DIM	TOL					