





# RoHS

## SPECIFICATIONS

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c  
 Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

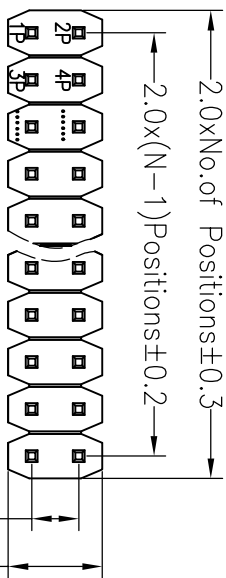

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

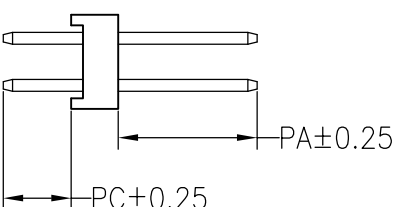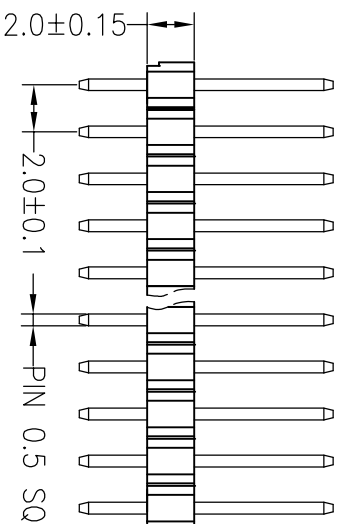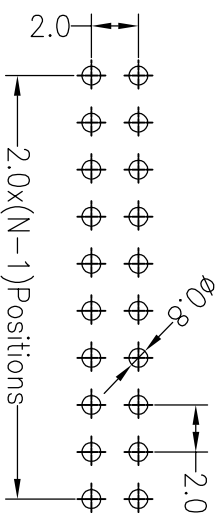

ITEM	PC	PA	L
Standard	2.80	4.10	8.90
Alternate			

深圳市连盛精密连接器有限公司

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4			PH-00848	
X.XXX	±0.10			SHEET	1/1			TITLE:	2.0PH H=2.0 2X8P DIP PA4.1 PC2.8
Angle	±3°	APPROVE		PROJ.					L=8.9 AU PA6T
DIM	TOL								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.08.29	NEW DRAWING	
1			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			