





RoHS

SPECIFICATIONS

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:400V AC/DC  
 Insulation Resistance:800MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au足0.8 Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

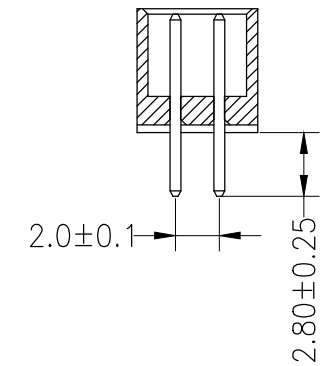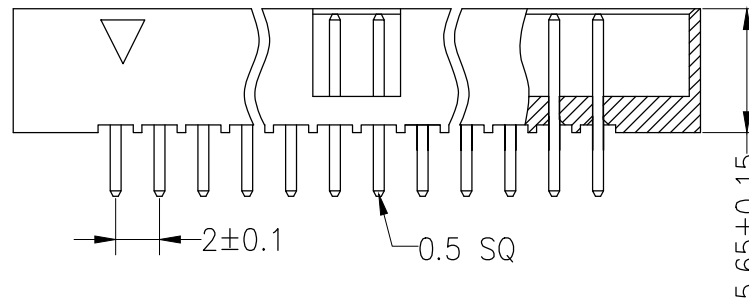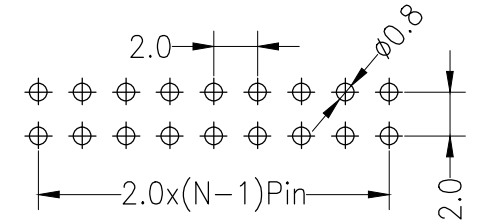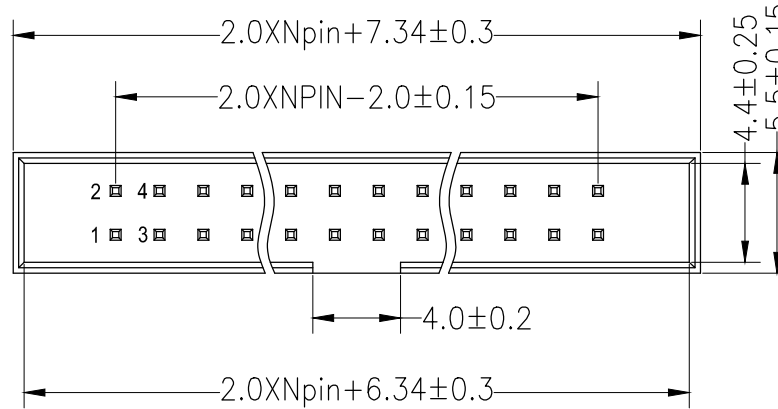

OPERATION		DRAW	SCALE	FIT
X.X	±0.30		UNIT	mm
X.XX	±0.20	CHECK	SIZE	A4
X.XXX	±0.10		SHEET	1/1
Angle	±3°	APPROVE	PROJ.	$\phi$ $\nabla$
DIM	TOL			

深圳市连盛精密连接器有限公司

PART NO. BH-00319

TITLE: 2.0BOX H=5.65 10P DIP

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	