


Low Current Consumption 32.768kHz OZ-I Type 2.0 x 1.6 mm SMD Crystal Oscillator

FEATURE

- Low Power Supply Voltage: 3.3, 2.5, 1.8V Supply Options
- Singled-end Output: CMOS
- Frequency: 32.768kHz
- Low Current Consumption: 18 μ A Max
- Temperature Range: -40°C to 85°C Operation
- Pb-free/RoHS Compliant




RoHS Compliant


TYPICAL APPLICATION

- RTC Module
- Smartphone
- IoT
- Wearable Device
- Watch, Medical

DIMENSION (mm)

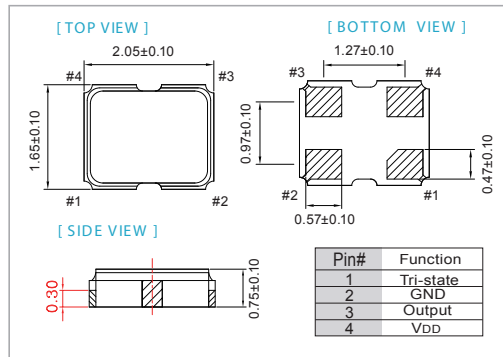

SOLDER PAD LAYOUT (mm)

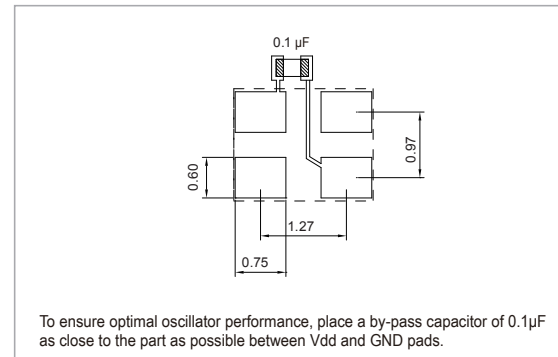

ELECTRICAL SPECIFICATION

Parameter	3.3V		2.5V		1.8V		Unit	
	Min.	Max.	Min.	Max.	Min.	Max.		
Supply Voltage Variation (V _{DD})	V _{DD} -10%	V _{DD} +10%	V _{DD} -5%	V _{DD} +5%	V _{DD} -5%	V _{DD} +5%	V	
Frequency Range	32.768						kHz	
Supply Current (No Load)	-	18	-	18	-	18	μ A	
Output Level	Output High	2.97	-	2.25	-	2.25	V	
	Output Low	-	0.33	-	0.25	-	0.25	V
Transition Time (10%-90%)	Rise Time / Fall Time	-	15.0	-	15.0	-	15.0	nSec
		Duty Cycle	45	55	45	55	45	55
Startup Time	-	20	-	20	-	20	mSec	
Tri-State Mode (Input to Pin 2)	Enable	0.7 x V _{DD}	-	0.7 x V _{DD}	-	0.7 x V _{DD}	-	
	Disable	-	0.3 x V _{DD}	-	0.3 x V _{DD}	-	0.3 x V _{DD}	V
Stand by Current	-	3	-	3	-	3	μ A	
Output Loading (CMOS)	-	15	-	15	-	15	pF	
Aging (@ 25°C, 1 st Year)	-	\pm 3	-	\pm 3	-	\pm 3	ppm	
Storage Temp. Range	-55	+125	-55	+125	-55	+125	°C	

FREQ. STABILITY vs. TEMP. RANGE

Temp.(°C)	ppm		
	\pm 20	\pm 25	\pm 50
-10~+60	○	○	○
-20~+70	○	○	○
-40~+85	△	○	○

*O: Available Δ : Conditional X: Not available
 *Inclusive of calibration @ 25°C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.