

description

The 74LS279 offers 4 basic $\overline{S}$ - $\overline{R}$ flip-flop latches in one 16-pin, 300-mil package. Under conventional operation, the $\overline{S}$ - $\overline{R}$ inputs are normally held high. When the $\overline{S}$ input is pulsed low, the Q output will be set high. When $\overline{R}$ is pulsed low, the Q output will be reset low. Normally, the $\overline{S}$ - $\overline{R}$ inputs should not be taken low simultaneously. The Q output will be unpredictable in this condition.

FUNCTION TABLE
(each latch)

INPUTS		OUTPUT
$\overline{S}^\dagger$	$\overline{R}$	Q
H	H	Q_0
L	H	H
H	L	L
L	L	$H^\ddagger$

H = high level L = low level

[†]For latches with double S inputs:

Q_0 = the level of Q before the indicated input conditions were established.


[‡] This configuration is nonstable: that is, it may not persist when the $\overline{S}$ and $\overline{R}$ inputs return to their inactive (high) level.

H = both $\overline{S}$ inputs high


L = one or both $\overline{S}$ inputs low

logic diagram (positive logic)

(latches 1 and 3)




(latches 2 and 4)



XD74LS279 ... JOR W PACKAGE

XL74LS279 ... JOR W PACKAGE


(TOP VIEW)



XD/XL74LS279 ... FK PACKAGE

(TOP VIEW)


logic symbol[§]

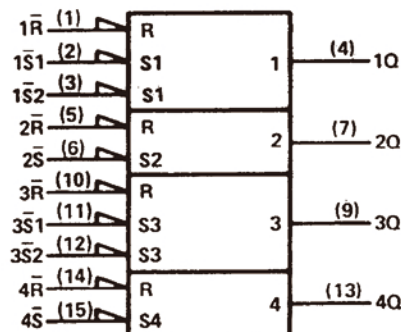


XD74LS279 DIP16 / XL74LS279 SOP16

schematics of inputs and outputs

'279 CIRCUITS

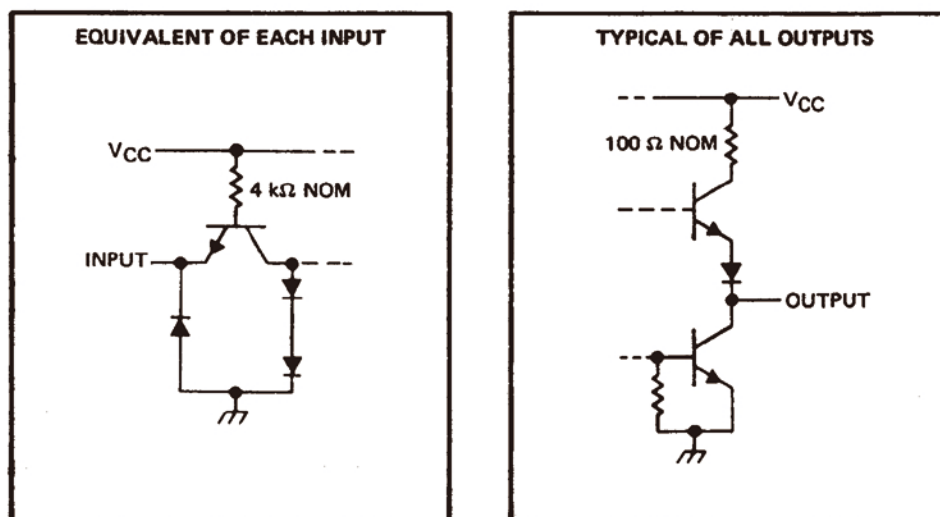

XD/XL74LS279 CIRCUITS

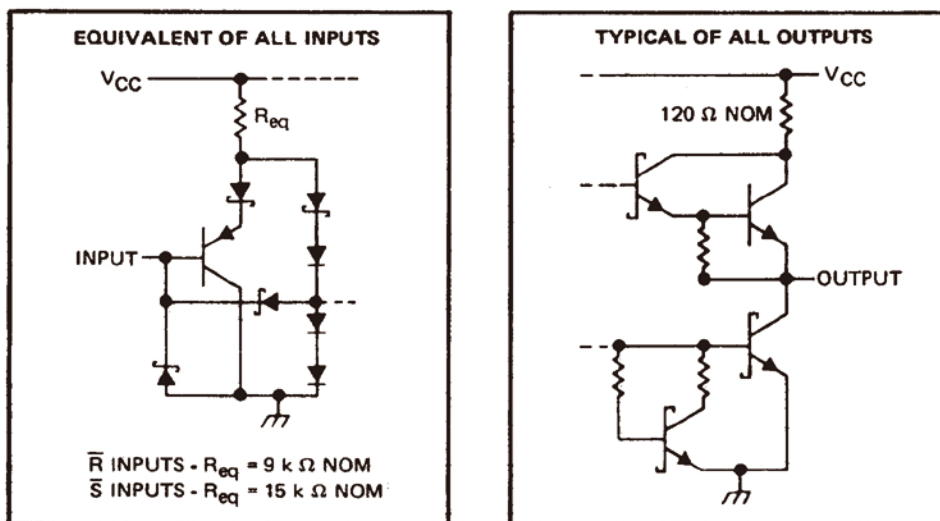

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage: '279	5.5 V
'LS279	7 V
Operating free-air temperature range: XD54' TYPES	- 55° C to 125° C
XD74' TYPES	0° C to 70° C
Storage temperature range	- 65° C to 150° C

XD74LS279 DIP16 / XL74LS279 SOP16

recommended operating conditions

	XD74LS279			XL74LS279			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC} Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V _{IH} High-level input voltage	2			2			V
V _{IL} Low-level input voltage			0.8			0.8	V
I _{OH} High-level output current			− 0.8			− 0.8	mA
I _{OL} Low-level output current			16			16	mA
t _w Pulse duration, low	20			20			ns
T _A Operating free-air temperature	− 55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	XD74LS279			XL74LS279			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V _{IK}	V _{CC} = MIN, I _I = − 12 mA			− 1.5			− 1.5	V
V _{OH}	V _{CC} = MIN, V _{IL} = 0.8 V, I _{OH} = − 0.8 mA	2.4	3.4		2.4	3.4		V
V _{OL}	V _{CC} = MIN, V _{IH} = 2 V, I _{OL} = 16 mA		0.2	0.4		0.2	0.4	V
I _I	V _{CC} = MAX, V _I = 5.5 V			1			1	mA
I _{IH}	V _{CC} = MAX, V _I = 2.4 V			40			40	μA
I _{IL}	V _{CC} = MAX, V _I = 0.4 V			− 1.6			− 1.6	mA
I _{OS} §	V _{CC} = MAX	− 18		− 55	− 18		− 57	mA
I _{CC}	V _{CC} = MAX, See Note 2		18	30		18	30	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at V_{CC} = 5 V, T_A = 25°C.

§ Not more than one output should be shorted at a time.

NOTE1: I_{CC} is measured with all R inputs grounded, all S inputs at 4.5 V, and all outputs open.

switching characteristics, V_{CC} = 5 V, T_A = 25°C (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS		MIN	TYP	MAX	UNIT
t _{PLH}	S	Q	R _L = 400 Ω, C _L = 15 pF		12	22		ns
t _{PHL}					9	15		
t _{PHL}	R	Q			15	27		ns

NOTE2: Load circuits and voltage waveforms are shown in Section 1.

XD74LS279 DIP16 / XL74LS279 SOP16

recommended operating conditions

	XD74LS279			XL74LS279			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V_{CC} Supply voltage	4.5	5	5.5	4.75	5	5.25	V
V_{IH} High-level input voltage	2			2			V
V_{IL} Low-level input voltage			0.7			0.8	V
I_{OH} High-level output current			-0.4			-0.4	mA
I_{OL} Low-level output current			4			8	mA
t_w Pulse duration, low	20			20			ns
T_A Operating free-air temperature	-55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	XD74LS279			XL74LS279			UNIT
		MIN	TYP‡	MAX	MIN	TYP‡	MAX	
V_{IK}	$V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$			-1.5			-1.5	V
V_{OH}	$V_{CC} = \text{MIN}, V_{IL} = \text{MAX}, I_{OH} = -0.4 \text{ mA}$	2.5	3.4		2.7	3.4		V
V_{OL}	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, I_{OL} = 4 \text{ mA}$		0.25	0.4		0.25	0.4	V
	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, I_{OL} = 8 \text{ mA}$					0.25	0.5	
I_I	$V_{CC} = \text{MAX}, V_I = 7 \text{ V}$			0.1			0.1	mA
I_{IH}	$V_{CC} = \text{MAX}, V_I = 2.7 \text{ V}$			20			20	μA
I_{IL}	$V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$			-0.2			-0.2	mA
$I_{OS}§$	$V_{CC} = \text{MAX}$	-20		-100	-20		-100	mA
I_{CC}	$V_{CC} = \text{MAX}, \text{ See note 2}$		3.8	7		3.8	7	mA

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$.

§ Not more than one output should be shorted at a time, and the duration of the short-circuit should be less than one second.


NOTE 1: I_{CC} is measured with all R inputs grounded, all S inputs at 4.5 V, and all outputs open.

switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^\circ\text{C}$ (see note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}	$\bar{S}$	Q	$R_L = 2 \text{ k}\Omega, C_L = 15 \text{ pF}$		12	22	ns
t_{PHL}					13	21	
t_{PHL}	$\bar{R}$	Q			15	27	ns


NOTE 2: Load circuits and voltage waveforms are shown in Section 1.

XD74LS279 DIP16 / XL74LS279 SOP16

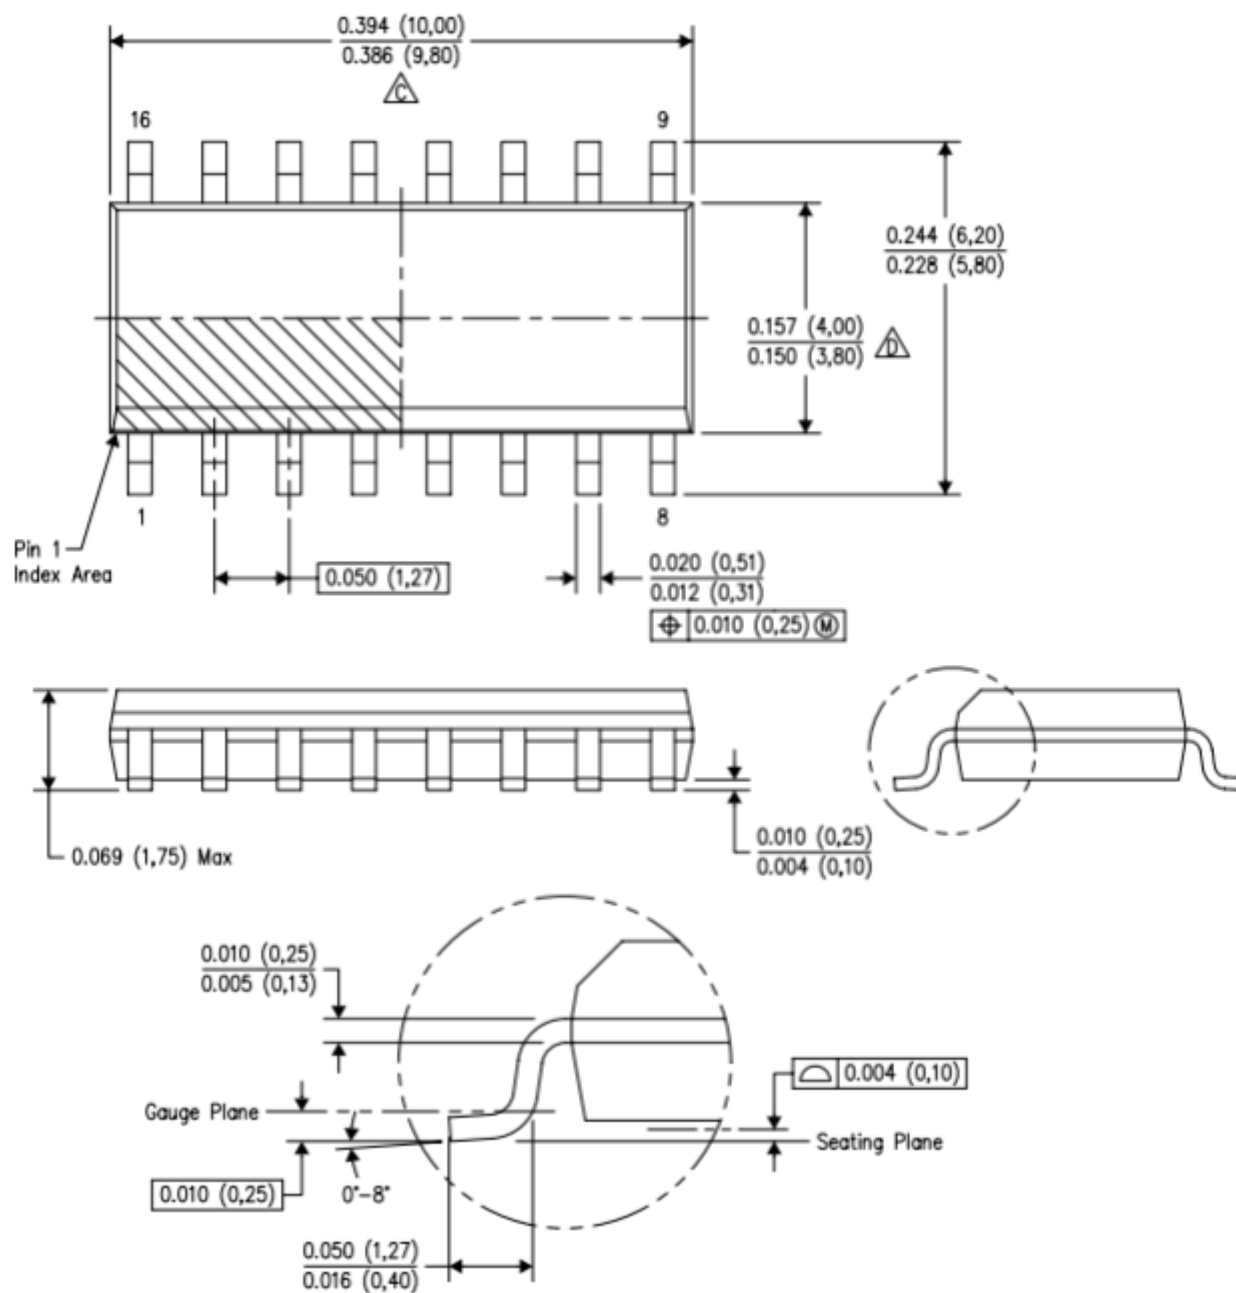


XD74LS279 DIP16 / XL74LS279 SOP16

DIP16

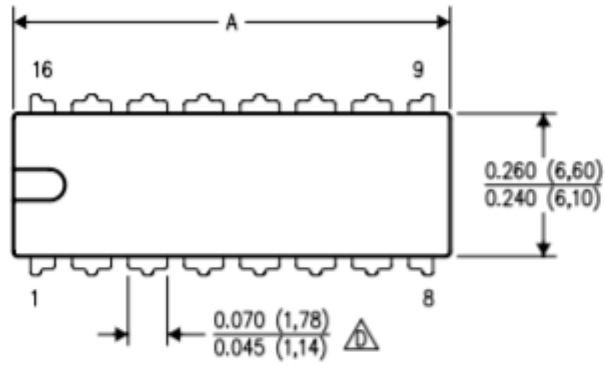

PINS **	14	16	18	20
DIM				
A MAX	0.775 (19,69)	0.775 (19,69)	0.920 (23,37)	1.060 (26,92)
A MIN	0.745 (18,92)	0.745 (18,92)	0.850 (21,59)	0.940 (23,88)
MS-001 VARIATION	AA	BB	AC	AD

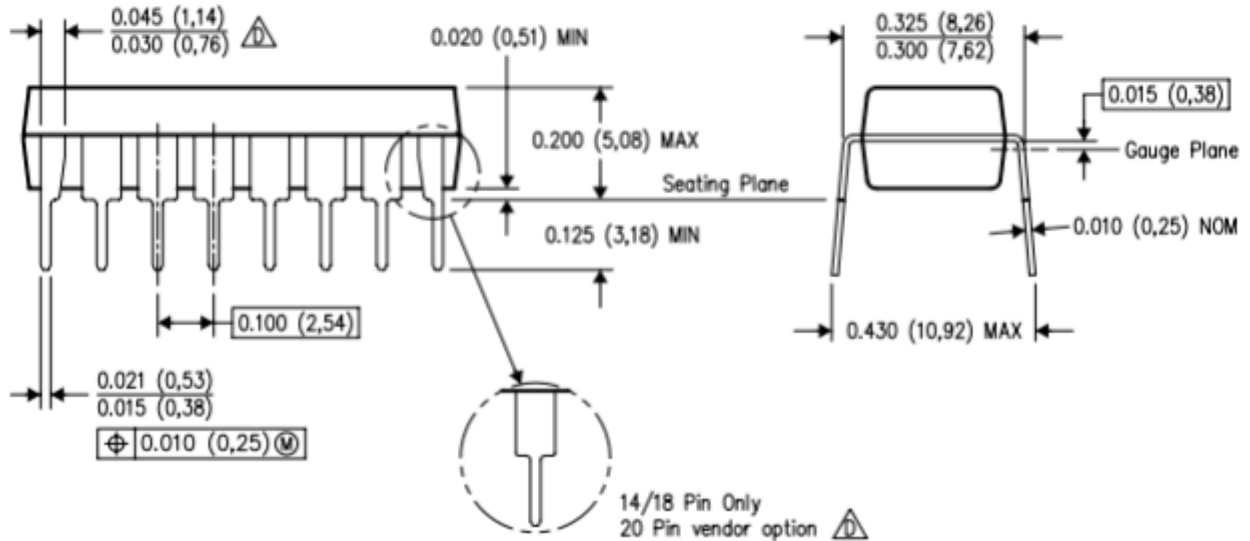

以上信息仅供参考. 如需帮助联系客服人员。谢谢 XINLUDA