


Kinghelm®

| REVISIONS | | | | | |
|-----------|--------|-------------|-----|-----|------|
| REV | NUMBER | DESCRIPTION | DWN | CHK | DATE |
| A | | DESIGN | | | |

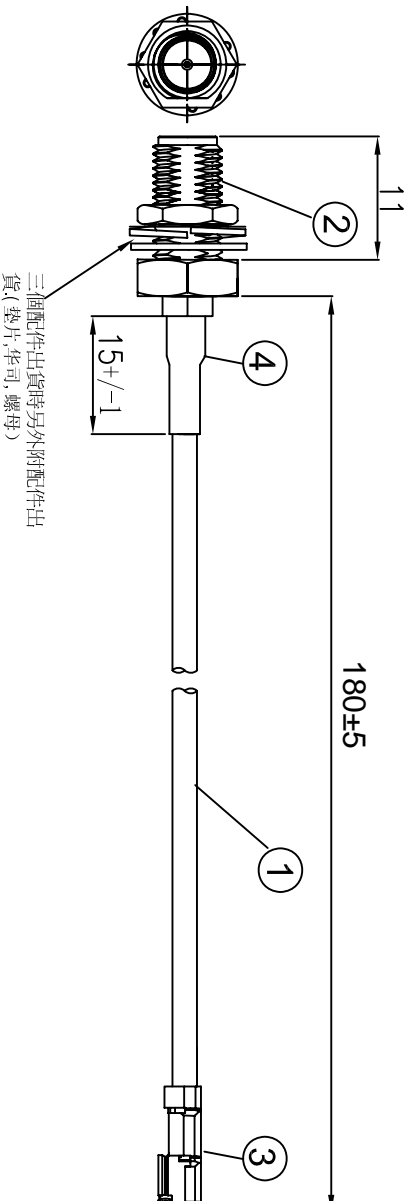

NOTES:

1. ELECTRICAL:
 - 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE:3.0 OHMMAX.
 - 1.3. INSULATION RESISTANCE:5.0M OHMMIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
 - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|-----------------------------|------|
| ④ | 套管 | 黑色热缩套管, OD:2.0MM | AS |
| ③ | 端子 | 高仿I-PEX 0.81 3代端子, 镀金 | 1 |
| ② | 接头 | SMA母头母针, 分体, 11牙, 镀金 | 1 |
| ① | 同轴线 | RF 0.81线材,颜色: 黑色, OD:0.81mm | AS |

深圳市金航标电子有限公司
 型号: KH-IPEX3-SMA-RG081-180mm
 WWW.BDS666.COM
 0755-83044319

| | | |
|----------------------------------|---------------------------------------------|------------|
| ALL DIMENSION ARE IN MM | DRAWN | DATE |
| | Jamy | 2020-06-18 |
| COMPUTER GENERATED IN SOLIDWORKS | ENG. | |
| | MFG. | |
| DO NOT SCALE THIS DRAWING | Q.A. | |
| PROJECTION | GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX | |
| | ± 1° ± 0.3 ± 0.25 ± 0.150 | |

| | | |
|-------------|--------|--------------|
| SIZE | Number | REV |
| B | | A |
| SCALE: Free | TYPE | SHEET 1 OF 1 |

I-PEX 0.81 3代 TO SMA /F L=180mm

CUSTOMER P/N:

4

3

2

1

A

B

C

D

A

B

C

D