


REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

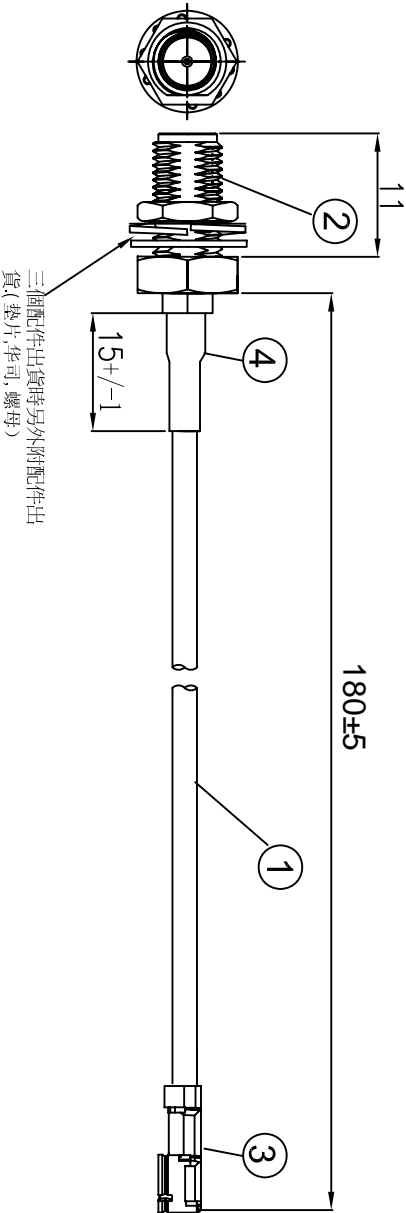

**NOTES:**

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE:3.0 OHMMAX.
  - 1.3. INSULATION RESISTANCE:5.0M OHM/MIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX 0.81 4代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	RF 0.81线材,颜色: 黑色, OD:0.81mm	AS

深圳市金航标电子有限公司 WWW.BDS666.COM

KH-IPEX4-SMA-RG081-180mm 0755-83044319

ALL DIMENSION ARE IN MM	DRAWN	DATE	I-PEX 0.81 4代 TO SMA /F L=180mm	
	Jamy	2020-06-18	SIZE	REV
COMPUTER GENERATED IN SOLIDWORKS	ENG.		B	A
DO NOT SCALE THIS DRAWING	MFG.		SCALE: Free	
PROJECTION	Q.A.		TYPE	SHEET 1 OF 1
GENERAL TOLERANCE FOR ANGLES X.X ± 1° X.XX ± 0.3 X.XXX ± 0.25 X.XXX ± 0.150				

CUSTOMER P/N:

4 3 2 1